



Figure similar

MLFB-Ordering data

6SL3210-1KE17-5AF1

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data	General tech. specifications																																																														
Input <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Line voltage</td><td>380 ... 480 V +10 % -20 %</td></tr> <tr> <td>Line frequency</td><td>47 ... 63 Hz</td></tr> <tr> <td>Rated current (LO)</td><td>9.50 A</td></tr> <tr> <td>Rated current (HO)</td><td>8.20 A</td></tr> </table>	Number of phases	3 AC	Line voltage	380 ... 480 V +10 % -20 %	Line frequency	47 ... 63 Hz	Rated current (LO)	9.50 A	Rated current (HO)	8.20 A	<table> <tr> <td>Power factor λ</td><td>0.70 ... 0.85</td></tr> <tr> <td>Offset factor $\cos \varphi$</td><td>0.95</td></tr> <tr> <td>Efficiency η</td><td>0.97</td></tr> <tr> <td>Sound pressure level (1m)</td><td>52 dB</td></tr> <tr> <td>Power loss</td><td>0.14 kW</td></tr> <tr> <td>Filter class (integrated)</td><td>Class A</td></tr> </table>	Power factor λ	0.70 ... 0.85	Offset factor $\cos \varphi$	0.95	Efficiency η	0.97	Sound pressure level (1m)	52 dB	Power loss	0.14 kW	Filter class (integrated)	Class A																																								
Number of phases	3 AC																																																														
Line voltage	380 ... 480 V +10 % -20 %																																																														
Line frequency	47 ... 63 Hz																																																														
Rated current (LO)	9.50 A																																																														
Rated current (HO)	8.20 A																																																														
Power factor λ	0.70 ... 0.85																																																														
Offset factor $\cos \varphi$	0.95																																																														
Efficiency η	0.97																																																														
Sound pressure level (1m)	52 dB																																																														
Power loss	0.14 kW																																																														
Filter class (integrated)	Class A																																																														
Output <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Rated voltage</td><td>400 V</td></tr> <tr> <td>Rated power IEC 400V (LO)</td><td>3.00 kW</td></tr> <tr> <td>Rated power NEC 480V (LO)</td><td>4.00 hp</td></tr> <tr> <td>Rated power IEC 400V (HO)</td><td>2.20 kW</td></tr> <tr> <td>Rated power NEC 480V (HO)</td><td>3.00 hp</td></tr> <tr> <td>Rated current (IN)</td><td>7.50 A</td></tr> <tr> <td>Rated current (LO)</td><td>7.30 A</td></tr> <tr> <td>Rated current (HO)</td><td>5.60 A</td></tr> <tr> <td>Max. output current</td><td>11.20 A</td></tr> <tr> <td>Pulse frequency</td><td>4 kHz</td></tr> <tr> <td>Output frequency for vector control</td><td>0 ... 240 Hz</td></tr> <tr> <td>Output frequency for V/f control</td><td>0 ... 550 Hz</td></tr> </table>	Number of phases	3 AC	Rated voltage	400 V	Rated power IEC 400V (LO)	3.00 kW	Rated power NEC 480V (LO)	4.00 hp	Rated power IEC 400V (HO)	2.20 kW	Rated power NEC 480V (HO)	3.00 hp	Rated current (IN)	7.50 A	Rated current (LO)	7.30 A	Rated current (HO)	5.60 A	Max. output current	11.20 A	Pulse frequency	4 kHz	Output frequency for vector control	0 ... 240 Hz	Output frequency for V/f control	0 ... 550 Hz	<table> <tr> <th colspan="2">Ambient conditions</th></tr> <tr> <td>Cooling</td><td>Air cooling using an integrated fan</td></tr> <tr> <td>Cooling air requirement</td><td>0.005 m³/s (0.177 ft³/s)</td></tr> <tr> <td>Installation altitude</td><td>1000 m (3280.84 ft)</td></tr> <tr> <th colspan="2">Ambient temperature</th></tr> <tr> <td>Operation</td><td>-10 ... 40 °C (14 ... 104 °F)</td></tr> <tr> <td>Transport</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> <tr> <td>Storage</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> <tr> <th colspan="2">Relative humidity</th></tr> <tr> <td>Max. operation</td><td>95 % At 40 °C (104 °F), condensation and icing not permissible</td></tr> <tr> <th colspan="2">Closed-loop control techniques</th></tr> <tr> <td>V/f linear / square-law / parameterizable</td><td>Yes</td></tr> <tr> <td>V/f with flux current control (FCC)</td><td>Yes</td></tr> <tr> <td>V/f ECO linear / square-law</td><td>Yes</td></tr> <tr> <td>Sensorless vector control</td><td>Yes</td></tr> <tr> <td>Vector control, with sensor</td><td>No</td></tr> <tr> <td>Encoderless torque control</td><td>No</td></tr> <tr> <td>Torque control, with encoder</td><td>No</td></tr> </table>	Ambient conditions		Cooling	Air cooling using an integrated fan	Cooling air requirement	0.005 m³/s (0.177 ft³/s)	Installation altitude	1000 m (3280.84 ft)	Ambient temperature		Operation	-10 ... 40 °C (14 ... 104 °F)	Transport	-40 ... 70 °C (-40 ... 158 °F)	Storage	-40 ... 70 °C (-40 ... 158 °F)	Relative humidity		Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible	Closed-loop control techniques		V/f linear / square-law / parameterizable	Yes	V/f with flux current control (FCC)	Yes	V/f ECO linear / square-law	Yes	Sensorless vector control	Yes	Vector control, with sensor	No	Encoderless torque control	No	Torque control, with encoder	No
Number of phases	3 AC																																																														
Rated voltage	400 V																																																														
Rated power IEC 400V (LO)	3.00 kW																																																														
Rated power NEC 480V (LO)	4.00 hp																																																														
Rated power IEC 400V (HO)	2.20 kW																																																														
Rated power NEC 480V (HO)	3.00 hp																																																														
Rated current (IN)	7.50 A																																																														
Rated current (LO)	7.30 A																																																														
Rated current (HO)	5.60 A																																																														
Max. output current	11.20 A																																																														
Pulse frequency	4 kHz																																																														
Output frequency for vector control	0 ... 240 Hz																																																														
Output frequency for V/f control	0 ... 550 Hz																																																														
Ambient conditions																																																															
Cooling	Air cooling using an integrated fan																																																														
Cooling air requirement	0.005 m³/s (0.177 ft³/s)																																																														
Installation altitude	1000 m (3280.84 ft)																																																														
Ambient temperature																																																															
Operation	-10 ... 40 °C (14 ... 104 °F)																																																														
Transport	-40 ... 70 °C (-40 ... 158 °F)																																																														
Storage	-40 ... 70 °C (-40 ... 158 °F)																																																														
Relative humidity																																																															
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible																																																														
Closed-loop control techniques																																																															
V/f linear / square-law / parameterizable	Yes																																																														
V/f with flux current control (FCC)	Yes																																																														
V/f ECO linear / square-law	Yes																																																														
Sensorless vector control	Yes																																																														
Vector control, with sensor	No																																																														
Encoderless torque control	No																																																														
Torque control, with encoder	No																																																														
Overload capability <table> <tr> <td>Low Overload (LO)</td><td>150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time</td></tr> <tr> <td>High Overload (HO)</td><td>200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time</td></tr> </table>	Low Overload (LO)	150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time	High Overload (HO)	200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time																																																											
Low Overload (LO)	150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time																																																														
High Overload (HO)	200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time																																																														



Figure similar

MLFB-Ordering data

6SL3210-1KE17-5AF1

Mechanical data	
Degree of protection	IP20 / UL open type
Size	FSA
Net weight	1.70 kg (3.75 lb)
Width	73 mm (2.87 in)
Height	196 mm (7.72 in)
Depth	208 mm (8.19 in)
Inputs / outputs	

Standard digital inputs

Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

Fail-safe digital inputs

Number	1
--------	---

Digital outputs

Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 0.5 A
Number as transistor	1
Output (resistive load)	DC 30 V, 0.5 A

Analog / digital inputs

Number	1 (Differential input)
Resolution	10 bit

Switching threshold as digital input

0→1	4 V
1→0	1.6 V

Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C
--

Communication	
---------------	--

Communication	PROFINET, EtherNet/IP
---------------	-----------------------

Connections	
-------------	--

Signal cable

Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)
-------------------------	---------------------------------------

Line side

Version	Plug-in screw terminals
---------	-------------------------

Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)
-------------------------	---------------------------------------

Motor end

Version	Plug-in screw terminals
---------	-------------------------

Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)
-------------------------	---------------------------------------

DC link (for braking resistor)

Version	Plug-in screw terminals
---------	-------------------------

Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)
-------------------------	---------------------------------------

Line length, max.	15 m (49.21 ft)
-------------------	-----------------

PE connection	On housing with M4 screw
---------------	--------------------------

Max. motor cable length

Shielded	50 m (164.04 ft)
----------	------------------

Unshielded	150 m (492.13 ft)
------------	-------------------

Standards	
-----------	--

Compliance with standards	UL, cUL, CE, C-Tick (RCM)
---------------------------	---------------------------

CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC
------------	---

MLFB-Ordering data


6SL3210-1KE17-5AF1



Figure similar

Converter losses to EN 50598-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-68.30 %

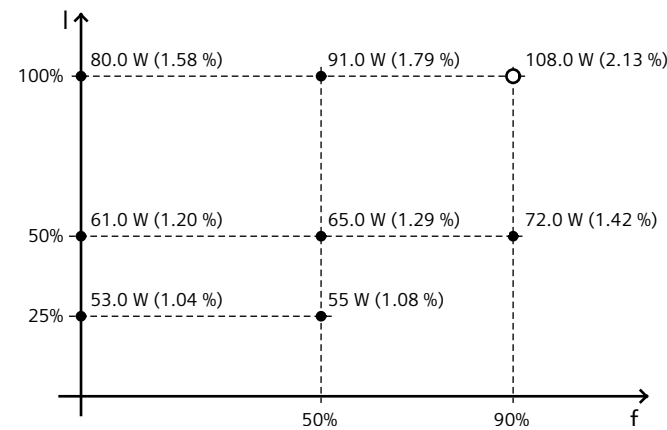

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values