



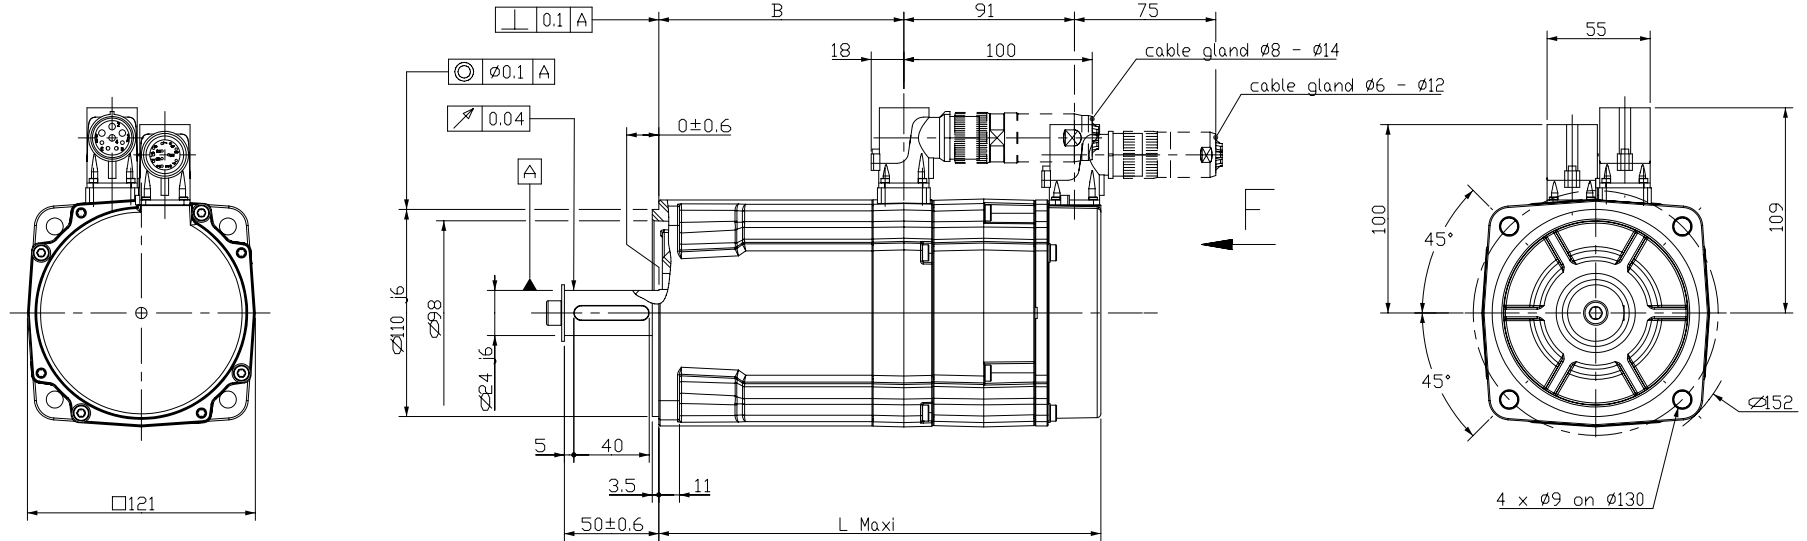


POWER CONNECTOR



F view

- 1 : Phase U
- 2 : Ground
- 3 : Phase W
- 4 : Phase V
- A : Brake +
- B : Brake -
- C, D : Temperature sensor (option)

FEEDBACK CONNECTOR



F view

BRAKE

Supply voltage : 24V ±10%
Static torque

	NX620	NX630
20°C	12 Nm	12 Nm
100°C	10 Nm	10 Nm


RESOLVER

Feed frequency..... : 8 kHz
Supply voltage..... : 7 V RMS
Input current..... : 70 mA Maxi
Max. electrical error..... : 20° Maxi
Transformation ratio..... : 0.5 typical
Phase shift..... : 20° Maxi
Polarity..... : 1 pair of poles


RELUCTANCE SENSOR

Feed frequency..... : 8 kHz
Input voltage..... : 7 V RMS
Input current..... : 71 mA Maxi
Max. electrical error..... : 8° Maxi
Transformation ratio..... : 0.33 typical
Phase shift..... : 15° Maxi
Polarity..... : 5 pairs of poles

ORIENTATION OF CONNECTORS



SHAFT END



DIMENSIONS

	NX620	NX630
L Maxi	236	265
B	130	159

Drawing valid for : R7301

Weight :

This document is the property of PARVEX. Transmission as well as reproduction or copy is not permitted without written authorisation.

Drawn	18/06/01	RP	Visa						
Modifications	b	AM 21359 02/04/03 NV							
	a	AM 21176 01/10/02 SP							

Scale
3:8

PARVEX
8 Avenue du lac. BP249
21007-DIJON cedex-FRANCE
www.parvex.com

NX600 + BRAKE

OUTLINE DRAWING

Format	F	E	S	G	I
A3	x	x			
344189E7301					

b