



Ordering data

6SL3224-0BE35-5UA0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data		General tech. specifications	
Input		Power factor λ	0.85
Number of phases	3 AC	Offset factor $\cos \phi$	0.95
Line voltage	380 ... 480 V ± 10 %	Efficiency η	0.97
Line frequency	47 ... 63 Hz	Sound pressure level (1m)	60 dB
Rated current with line reactor	151.00 A	Power loss	1.93 kW
Rated current without line reactor	168.00 A	Ambient conditions	
Output		Cooling	Internal air cooling
Number of phases	3 AC	Cooling air requirement	0.150 m ³ /s
Rated voltage	400 V	Installation altitude	1000 m
Rated power (LO)	75.00 kW	Ambient temperature	
Rated power (HO)	55.00 kW	Operation LO	0 ... 40 °C (32 ... 104 °F)
Rated current (LO)	145.00 A	Operation HO	0 ... 50 °C (32 ... 122 °F)
Rated current (HO)	110.00 A	Transport	-40 ... 70 °C (-40 ... 158 °F)
Max. output current	220.00 A	Storage	-25 ... 55 °C (-13 ... 131 °F)
Pulse frequency	4 kHz	Relative humidity	
Output frequency for vector control	0 ... 200 Hz	Max. operation	95 % RH, condensation not permitted
Output frequency for V/f control	0 ... 550 Hz		

Overload capability

Low Overload (LO)

1.1 × output current rating (i.e., 110 % overload) for 57 s with a cycle time of 300 s 1.5 × output current rating (i.e., 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 × output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 × output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

SIEMENS

Data sheet for SINAMICS Power Module PM240




Ordering data

6SL3224-0BE35-5UA0

Mechanical data	Connections
Degree of protection	Line side
Size	Version
Net weight	Conductor cross-section
Width	Motor end
Height	Version
Depth	Conductor cross-section
Converter losses to EN 50598-2*	DC link (for braking resistor)

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-59.87 %

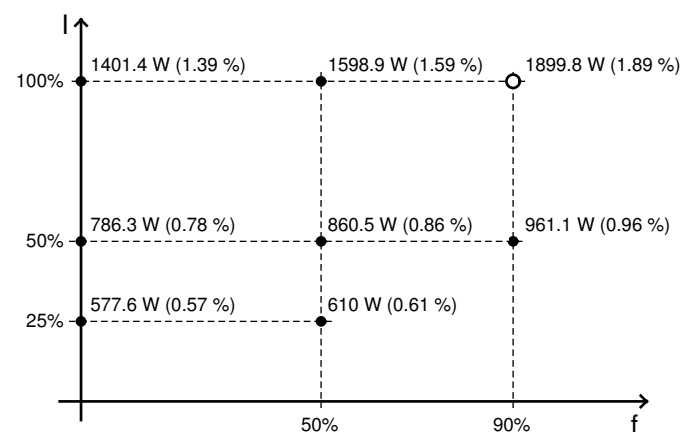

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*calculated values; increased by 10% according to the standard

Conductor cross-section	25.00 ... 120.00 mm²
-------------------------	----------------------

Max. motor cable length	
Shielded	50 m
Unshielded	100 m

Standards	
Compliance with standards	UL, cUL, CE, C-Tick, SEMI F47
CE marking	According to low-voltage directive 2006/95/EC