

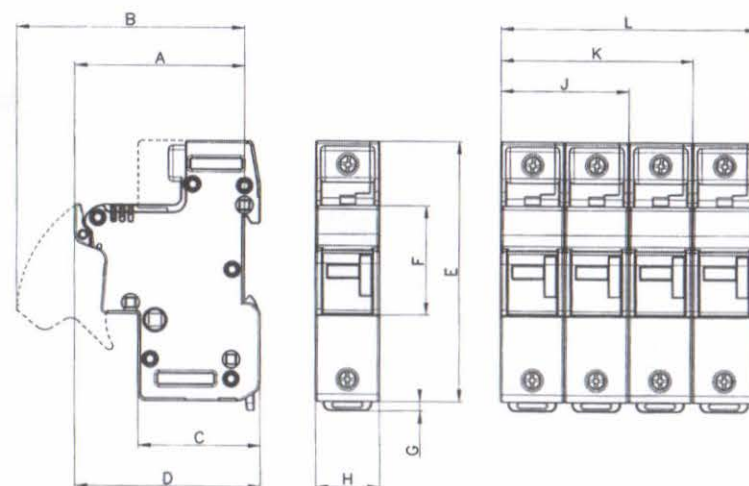
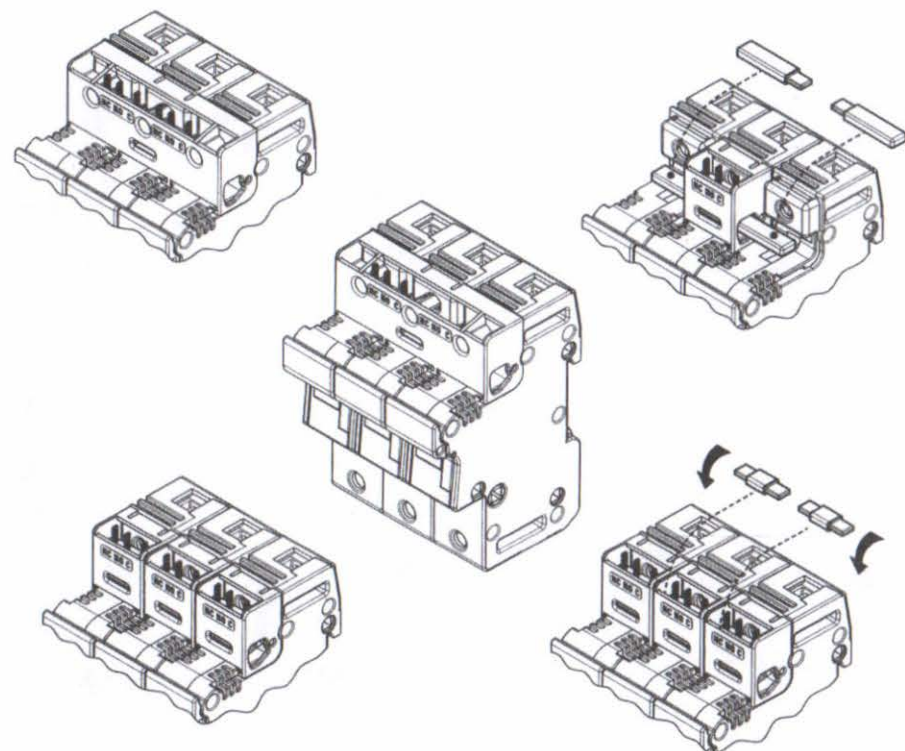
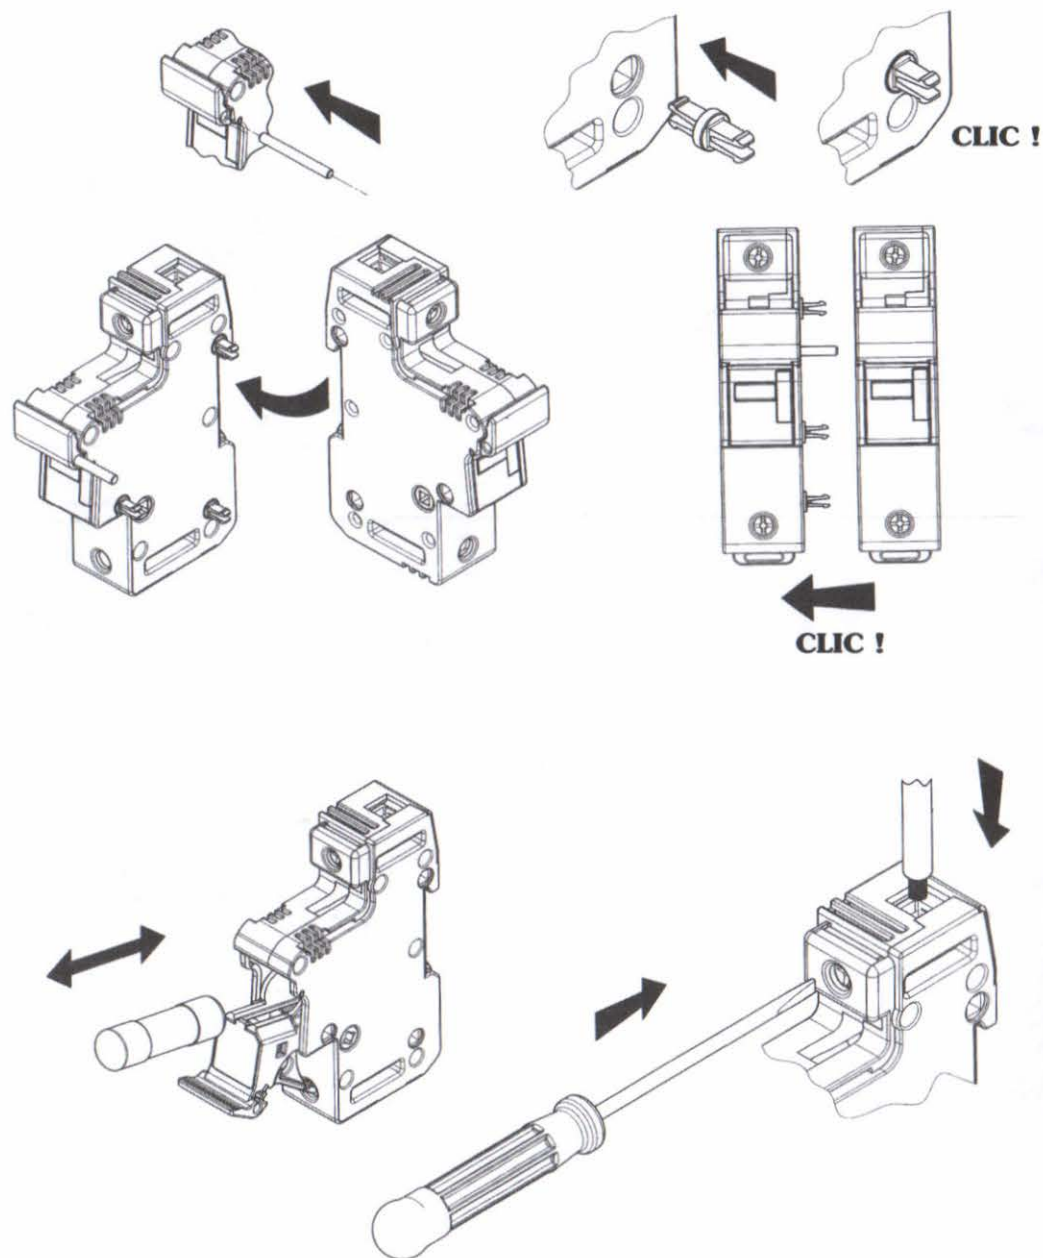
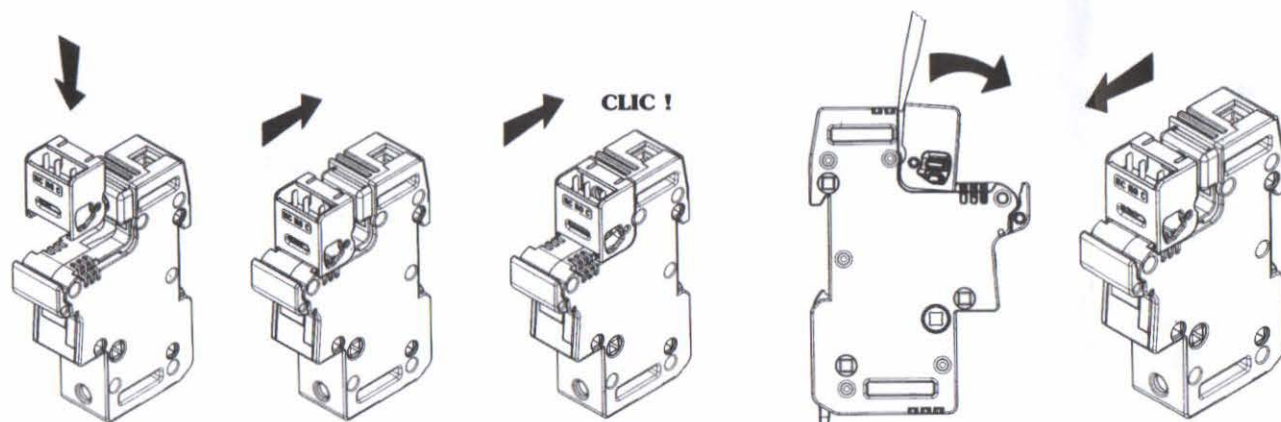
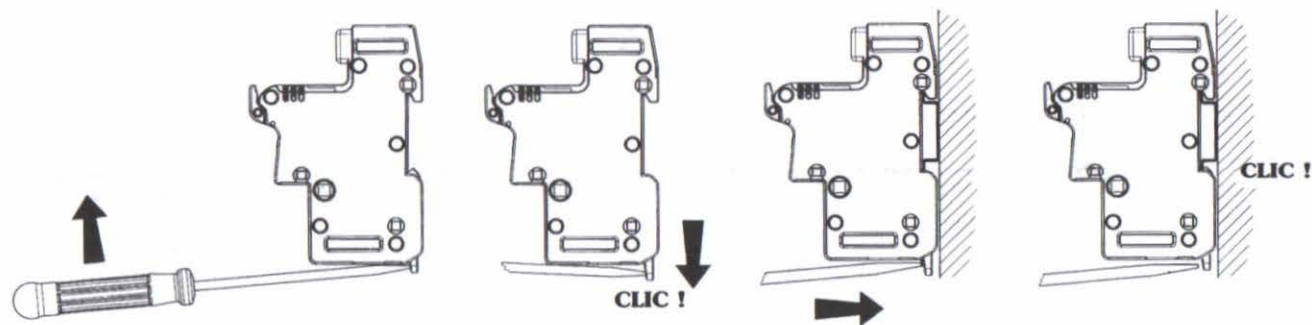


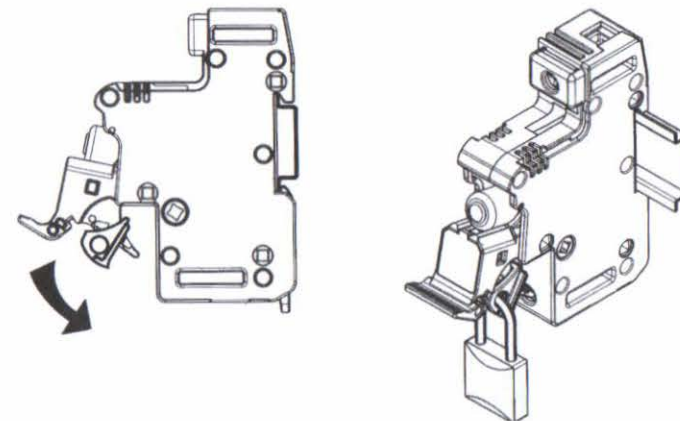

	CMS.14 US.14	CMS.22 US.22
A	70	70
B	94	96,5
C	50,5	50,5
D	76,5	76,5
E	107	126,5
F	45	45
G	3,8	1
H	26,5	35
J	53	70
K	79,5	105
L	106	140

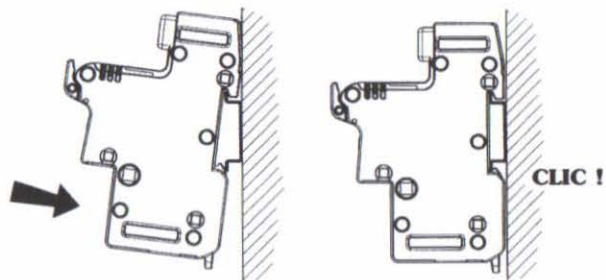

	Tensión	Tensión	Intensité Nominale du Fusible	Intensité Maximale du Circuit				Section des câbles	Couple de serrage
	Voltage	Voltage	Intensidad	Intensidad máxima circuito				Sección cable	
	Voltage rating	Voltage rating	nominal fusible	Maximum fuse operating current				Adviser cooper	Par
	U _N (V)	U _N (V)	Fuse current rating I _N (A)	(A)				wire size (mm²)	Torque
				gG	aM	A70QS	Ultrafast		
CMS.14 US.14	690 750	8	0,25	0,25	0,25				N.m 3.5
			0,5						
			1						
			2						
			4						
			6						
			8						
			10			10	10		
			12			12	12		
			16			16	16	2,5	
			20			20	20	2,5	In-lbs. 35
			25			25	25	4	
			32			32	35	6	
			40			30	30	6	
			50	40	40	10			
			50	50	38	35			
CMS.22 US.22	690 750	8	1	1	1				N.m 4
			2						
			4						
			6						
			8						
			10						
			12						
			16						
			20			20	20	4	In-lbs. 45
			25			25	25	6	
			32			32	42	10	
			40			40	40	10	
			50			50	50	10	
			63			51	63	16	
			80			64	60	25	
			100	100	100	74	70	35	
			125	125	125			35	