

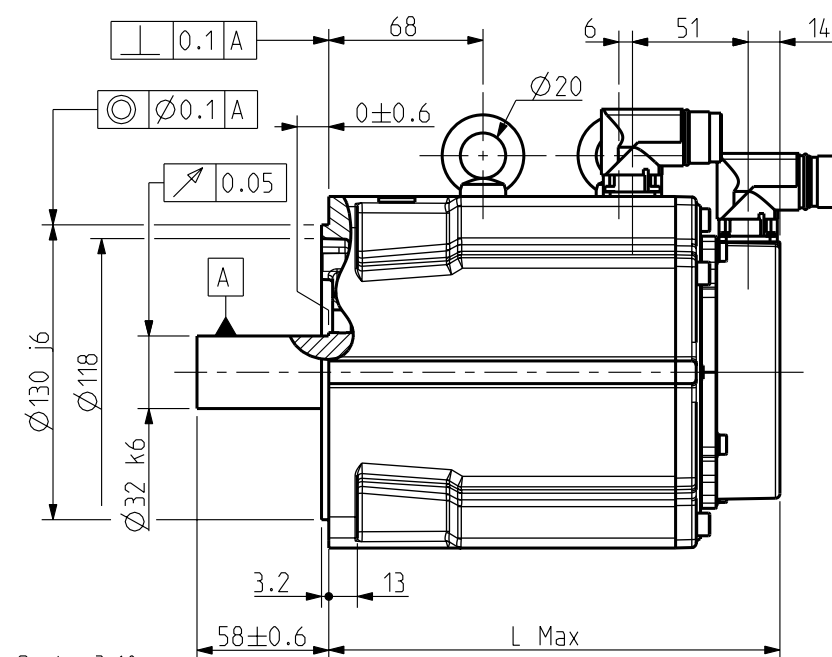



Feedback letter : A/X

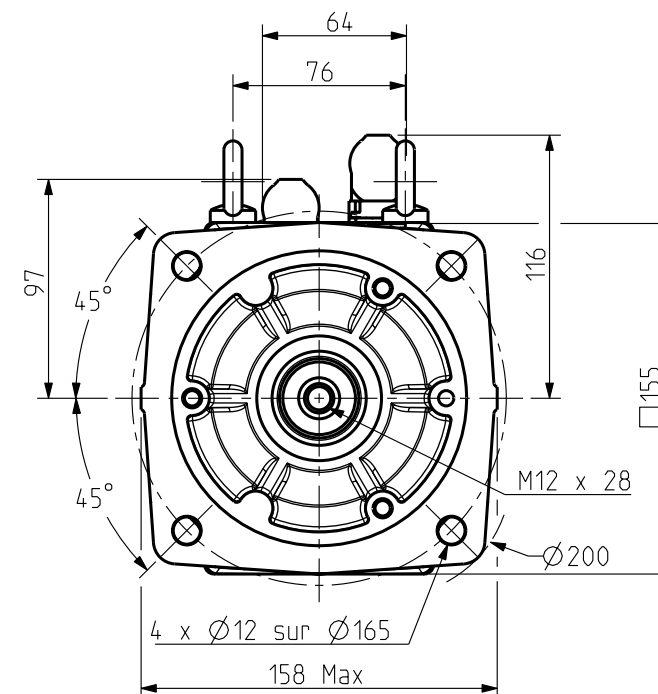

Scale 3:10

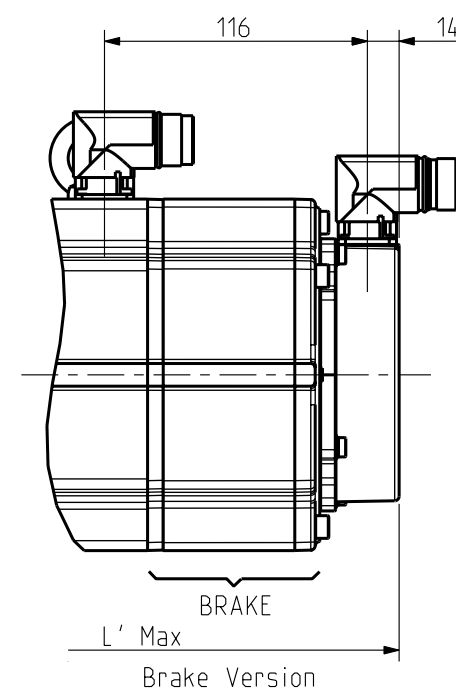

Key

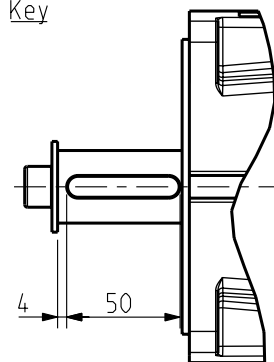

Scale 3:10

Shaft End

BRAKE Supply voltage : 24V $\pm 10\%$
Static torque


	NX820	NX840	NX860
20 °C	36 Nm	36 Nm	36 Nm
100 °C	32 Nm	32 Nm	32 Nm

Weight


	NX820	NX840	NX860
No Brake	13 Kg	20 Kg	27 Kg
With Brake	16.5 Kg	23.5 Kg	30.5 Kg

ORIENTATION OF CONNECTORS

LETTER T and U

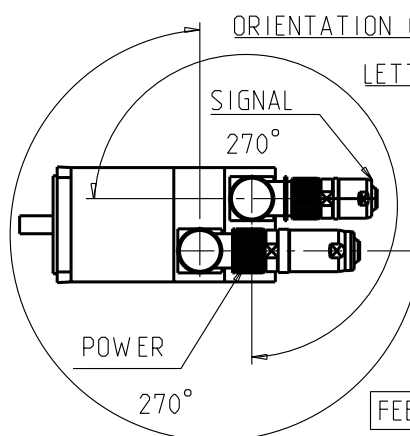


ALL OTHER LETTERS

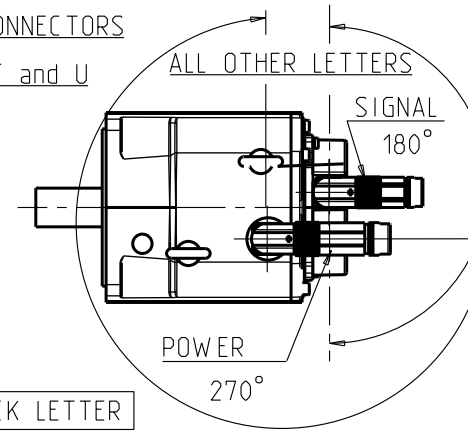


FEEDBACK OPTIONS

Feedback letter : R/S/V/W

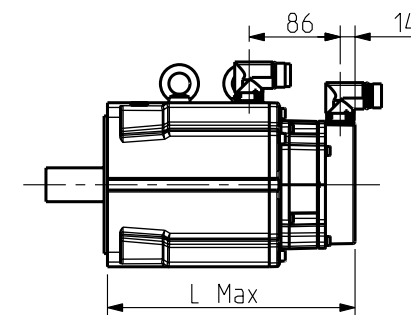


Scale 7:50

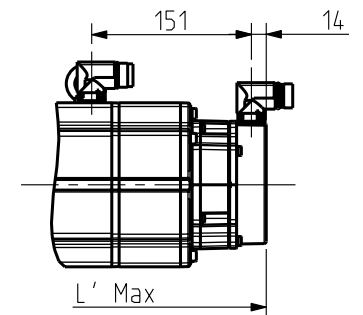


Brake Version

Feedback letter : T/U

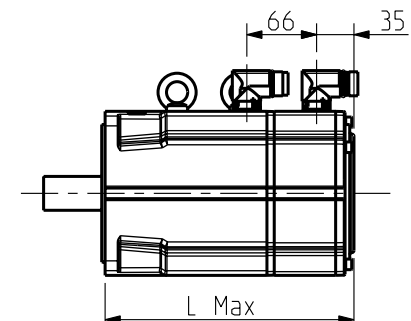


Scale 7:50




Brake Version

Feedback letter : Y

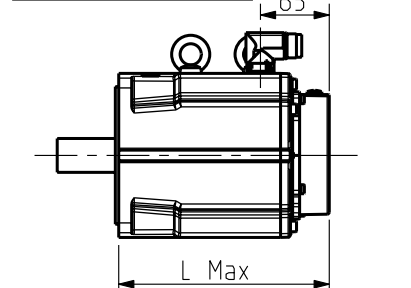

Scale 7:50



Brake Version

	Feedback options (feedback letter)	Resolver (A)	Low cost encoder (X)	Hiperface SKS36 (R)	Hiperface SKM36 (S)	Endat ECN1113 (V)	Endat EQN1125 (W)	Hiperface SRS50 (T)	Hiperface SRM50 (U)	Sensorless (Y)
NX820	L (mm)	200				235		236		200
	L' (mm)	266				301		282		266
NX840	L (mm)	260				295		296		260
	L' (mm)	326				361		342		326
NX860	L (mm)	320				355		356		320
	L' (mm)	386				421		402		386

N X 8 _ _ E _ _ R 7 _ _ _
Torque range
(depends on length)
Winding
(depends on speed)

0 : Plain Shaft
1 : key

0 : IP 64
1 : IP 65

A : Resolver
R : Hiperface Singleturn SKS36
S : Hiperface Multiturn SKM36
T : Hiperface Singleturn SRS50
U : Hiperface Multiturn SRM50
V : Endat Singleturn ECN1113
W : Endat Multiturn EQN1125
X : Low Cost Encoder
Y : Sensorless

0 : Without Brake
3 : Brake
* : Thermal protection
options on drawing
344993

See connectors pin out and encoder settings on drawing 344993

Sheet:1/4

This document is the property of
PARVEX. Transmission as well as
reproduction or copy is not permitted
without written authorisation.

General
tolerances

DIN ISO
2768 mK

Drawn
Modifications

09/07/09 YG Visa
C AM 24108 22/04/13 SD
B AM24031 14/12/12 BB
A AM23337 15/02/10 OD

Scale

1:5

Parker

8 Avenue du Lac. BP249
21007-DIJON cedex-FRANCE
www.SSDrives.com

NX800

CONNECTOR VARIANT




Format
A3

F E S G I
x

344469

C

Feedback letter : Y

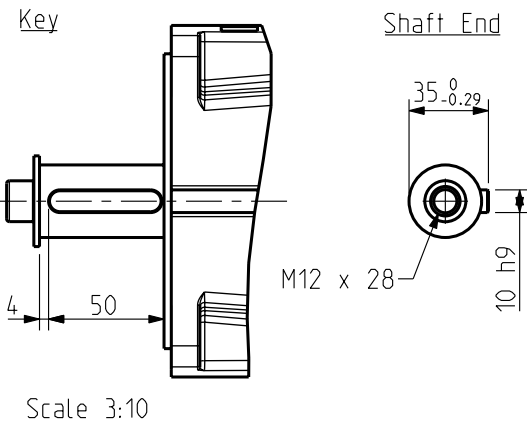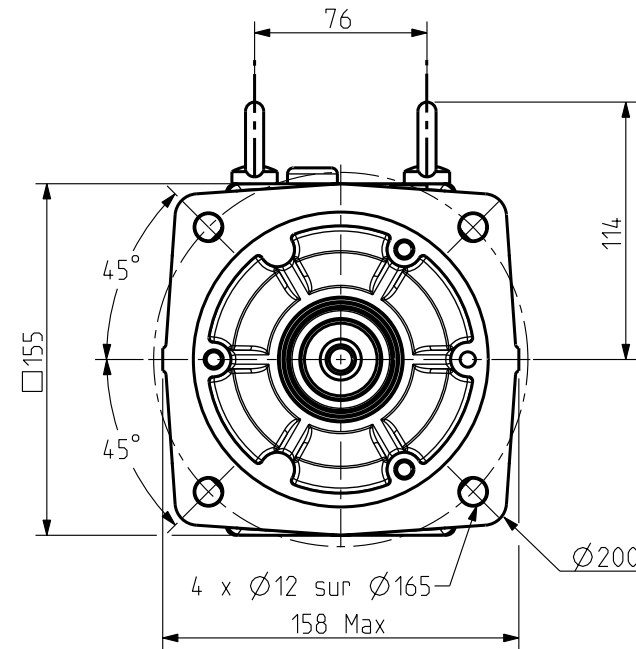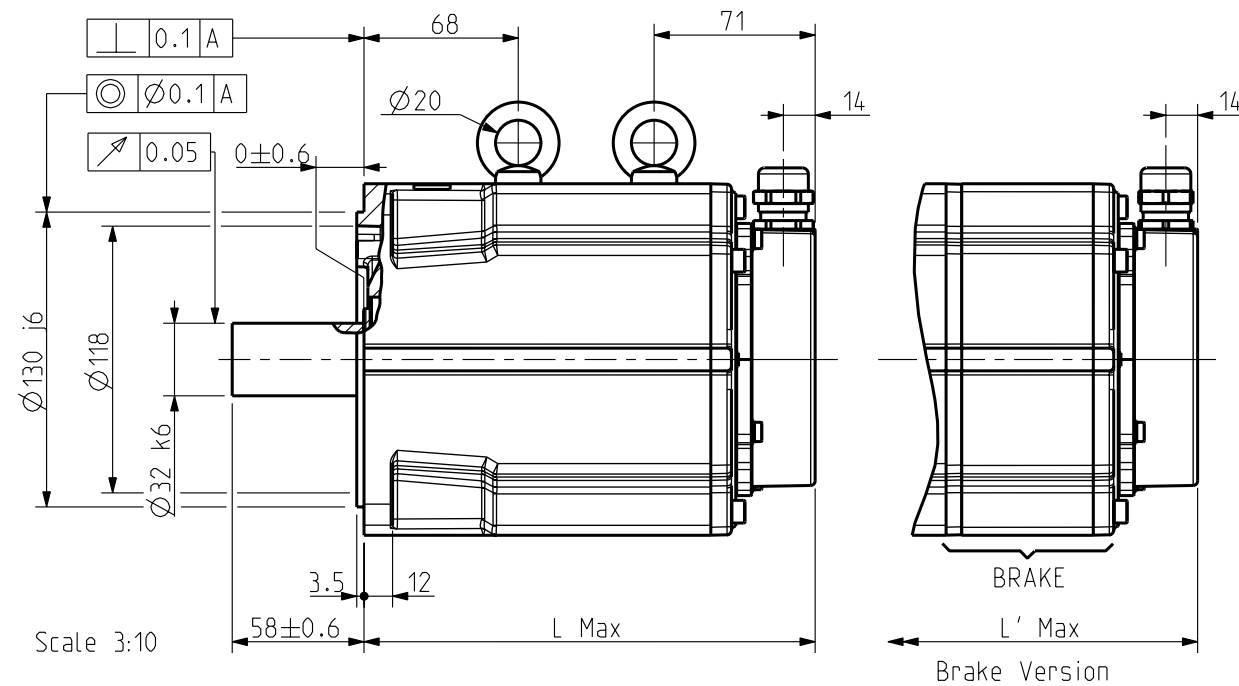

BRAKE Supply voltage : 24V $\pm 10\%$
Static torque

	NX820	NX840	NX860
20 °C	36 Nm	36 Nm	36 Nm
100 °C	32 Nm	32 Nm	32 Nm

Weight

	NX820	NX840	NX860
No Brake	13 Kg	20 Kg	27 Kg
With Brake	16.5 Kg	23.5 Kg	30.5 Kg

	Feedback options (feedback letter)	Sensorless (Y)
NX820	L (mm)	200
	L' (mm)	266
NX840	L (mm)	260
	L' (mm)	326
NX860	L (mm)	320
	L' (mm)	386

N X 8 _ _ E Y _ R 6 _ _ _

Torque range
(depends on length)

Winding
(depends on speed)

0 : Plain Shaft
1 : key

0 : IP 64
1 : IP 65

0 : Without Brake
3 : Brake
* : Thermal protection
options on drawing
344993

See connectors pin out and encoder settings on drawing 344993

Sheet:2/4

This document is the property of
PARVEX.Transmission as well as
reproduction or copy is not permitted
without written authorisation.

General
tolerances

DIN ISO
2768 mK

Drawn	09/07/09	YG	Visa						
Modifications	C	AM24108 22/04/13 SD							
	B	AM24031 14/12/12 BB							
	A	AM23337 15/02/10 OD							

Scale

3:10

Parker
8 Avenue du lac. BP249
21007-DIJON cedex-FRANCE
www.SSDrives.com

NX800

SENSORLESS VARIANT


Format
A3

F	E	S	G	I	
	x				


344469

C



Feedback letter : A/X

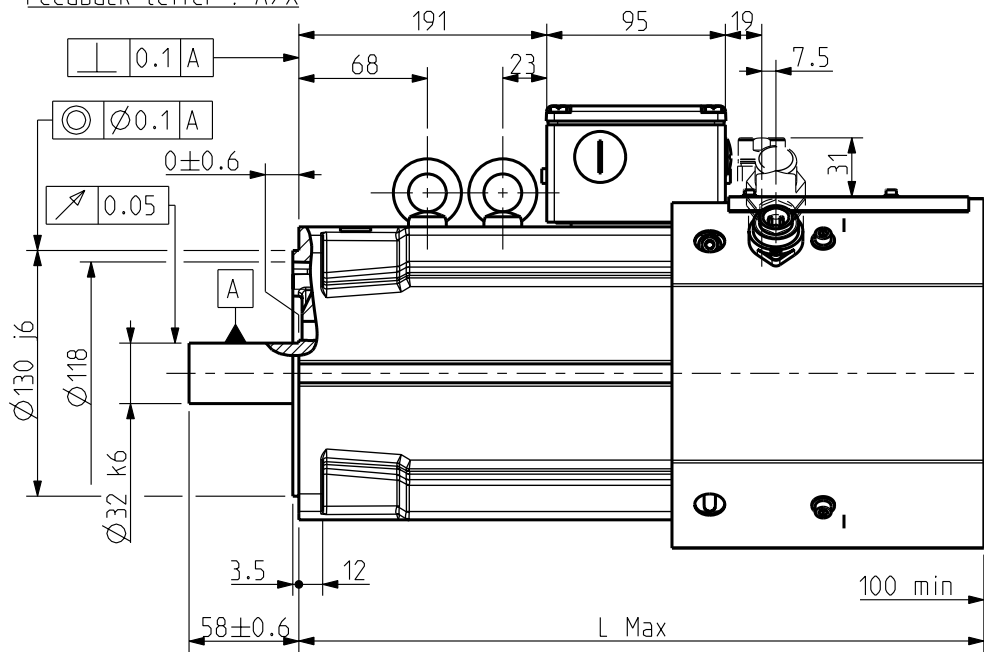


Scale 1:4

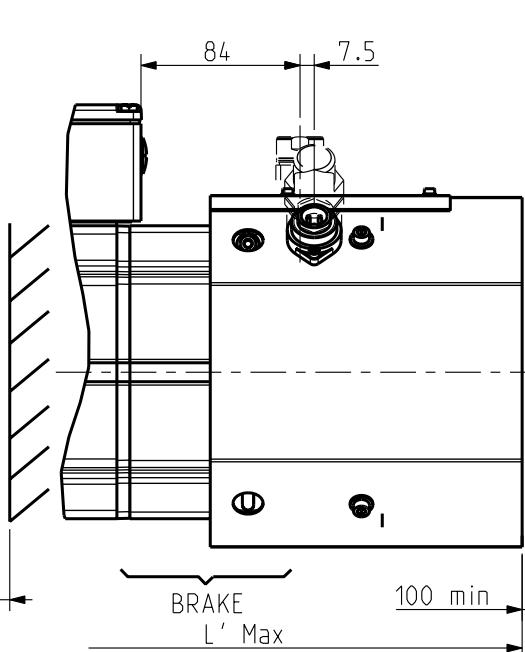

Brake Version

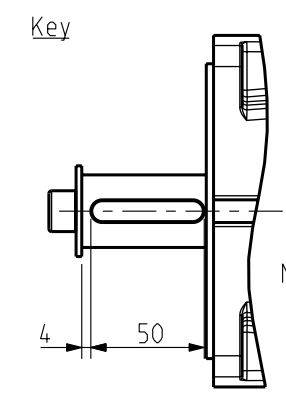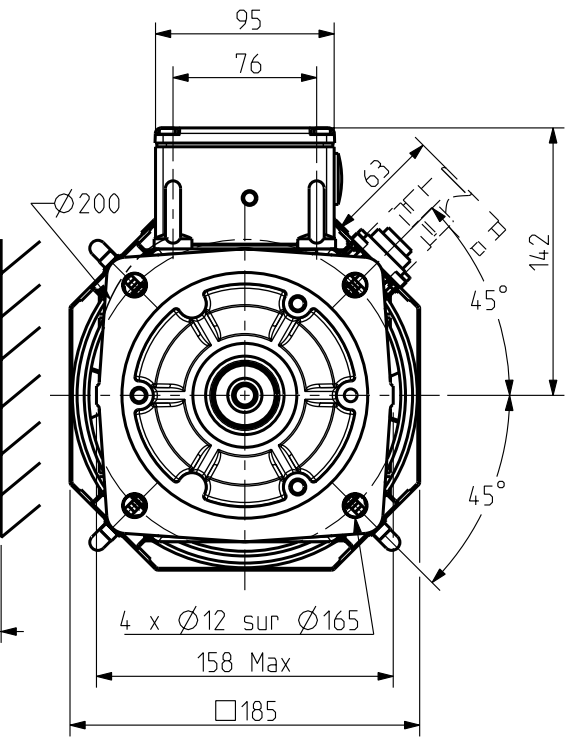

Scale 3:10

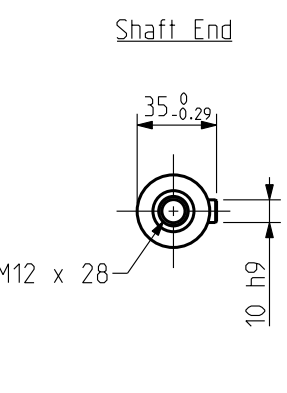


BRAKE Supply voltage : 24V $\pm 10\%$
Static torque

	NX860
20 °C	36 Nm
100 °C	32 Nm


Weight

	NX860
No Brake	30.5 Kg
With Brake	34 Kg

TOP VIEW

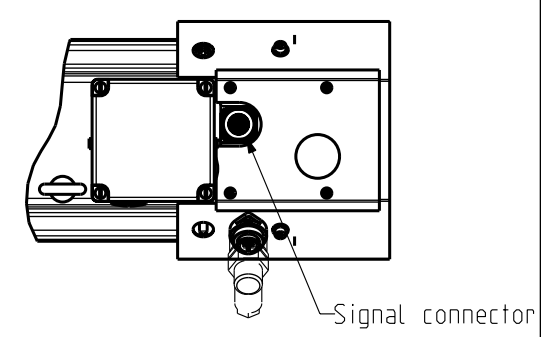

POWER TERMINAL BOX ORIENTATION

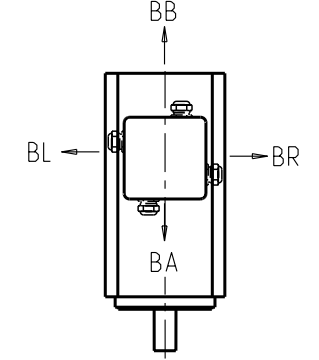

Standard orientation : BR

FEEDBACK OPTIONS

Feedback letter : R/S/V/W

Scale 3:25

Brake Version

Feedback letter : T/U

Scale 3:25

Brake Version

Feedback letter : Y

Scale 3:25

Brake Version

	Feedback options (feedback letter)	Resolver (A)	Low cost encoder (X)	Hiperface SKS36 (R)	Hiperface SKM36 (S)	Endat ECN1113 (V)	Endat EQN1125 (W)	Hiperface SRS50 (T)	Hiperface SRM50 (U)	Sensorless (Y)
NX860	L (mm)	424		424		460		490		424
	L' (mm)	490		490		525		555		490

N X 8 _ _ V _ _ R 9 _ _ _

N X 8 _ _ V _ _ R 5 ** _ _ _

Torque range
(depends on length)

Winding
(depends on speed)

0 : Plain Shaft
1 : key

0 : IP 64
1 : IP 65

A : Resolver
R : Hiperface Singleturn SKS36
S : Hiperface Multiturn SKM36
T : Hiperface Singleturn SRS50
U : Hiperface Multiturn SRM50
V : Endat Singleturn ECN1113
W : Endat Multiturn EQN1125
X : Low Cost Encoder
Y : Sensorless

0 : Without Brake
3 : Brake
* : Thermal protection
options on drawing
344993

** UL TERMINAL BOX AND VENTILATION

See connectors pin out and encoder settings on drawing 344993

This document is the property of
PARVEX. Transmission as well as
reproduction or copy is not permitted
without written authorisation.

General
tolerances

DIN ISO
2768 mK

Drawn	09/07/09	YG	Visa						
Modifications	C	AM 24108 22/04/13 SD							
	B	AM24031 14/12/12 BB							
	A	AM23337 15/02/10 OD							

Scale

1:4



NX800

TERMINAL BOX - VENTILATED

Format	F	E	S	G	I	
A3		x				
344469						