

BRUSHLESS MOTORS
NX820EAX
ELECTRONIC DRIVE (1)
DIGIVEX 7.5/15 et DIGIVEX 8/16
(230 V) (400 V)




Torque at low speed	M_o	Nm	16		
Permanent current at low speed	I_o	A_{rms}	5.16		
Peak torque	M_p	Nm	50		
Current for the peak torque	I_p	A_{rms}	20.3		
Back emf constant at 1000 rpm (25°C)*	K_e	V_{rms}	193		
Torque sensitivity	K_t	Nm/A_{rms}	3.1		
Winding resistance (25°C)*	R_b	Ω	4.53		
Winding inductance*	L	mH	38.7		
Rotor inertia	J	$kgm^2 \times 10^{-5}$	320		
Thermal time constant	T_{th}	min	34		
Motor mass	M	kg	13		
Voltage of the mains	UR1 UR2 UR3	V_{rms}	230	400	480
Rated speed	Nn1 Nn2 Nn3	rpm	1000	1900	2100
Rated torque	Mn1 Mn2 Mn3	Nm	15.38	14.72	14.56
Rated current	In1 In2 In3	A_{rms}	4.99	4.79	4.75
Rated power	Pn1 Pn2 Pn3	W	1610	2930	3200

All data are given in typical values under standard conditions

* Phase to phase

(1) Please check the availability of this drive with 480 V

Voltages and currents are given in rms values

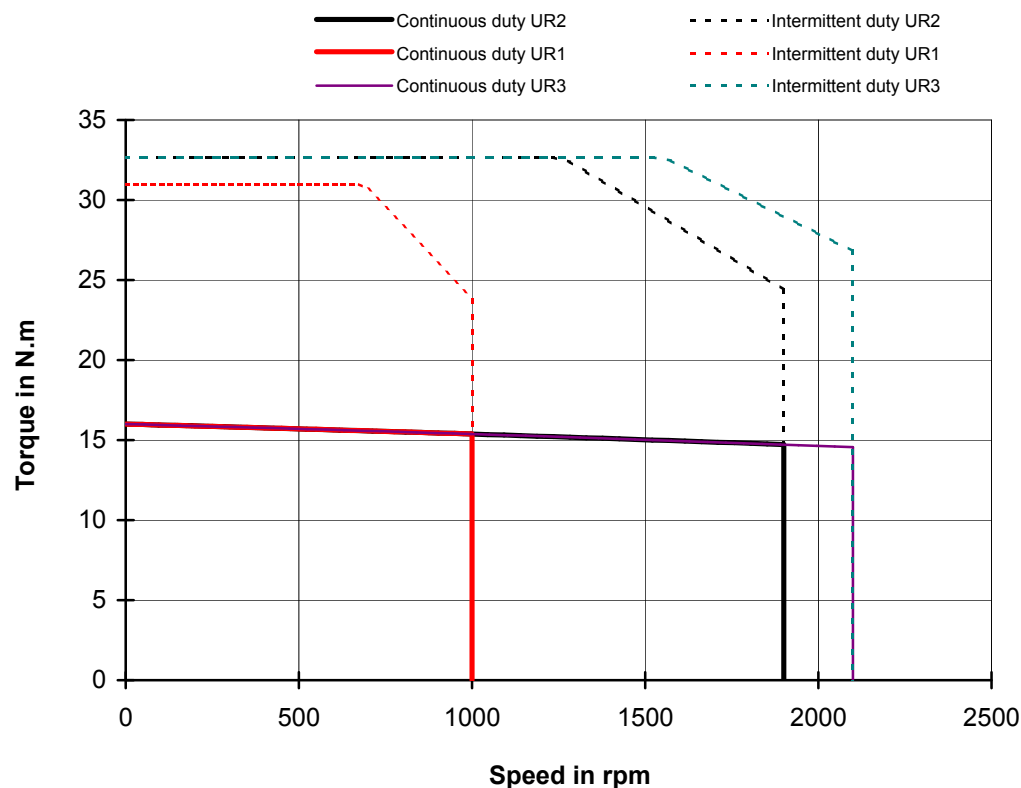

Characteristics are given for an optimal drive of the motor

FICHE-009

Création: 08 août 2001

Edition: 10/févr/2005

NX820EAX

.a