


Extract from Pilz PNOZ Product Manual Showing Connections for SS1 and STO with a suitable Inverter Drive

Two contacts from emergency stop (page 17)




Reset button (page 18)

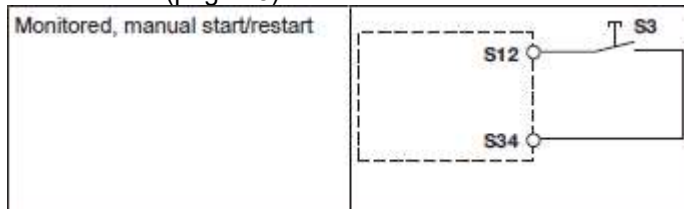

Two instant outputs to active braking of load (page 9), volt free 13-14 and 23-24

Two delayed outputs to activate STO (page 9), volt free 37-38 and 47-48

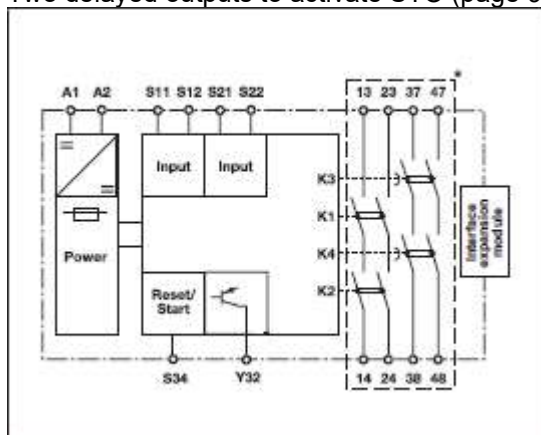

Delay time variable in steps from 0,04 to 300 s (page 26)

Delay time t_v	0,04 s, 0,1 s, 0,2 s, 0,3 s, 0,4 s, 0,5 s, 0,6 s, 0,7 s, 0,8 s, 1 s, 1,5 s, 2 s, 2,5 s, 3 s, 3,5 s, 4 s, 5 s, 6 s, 7 s, 8 s, 10 s, 12 s, 14 s, 15 s, 16 s, 20 s, 25 s, 30 s, 35 s, 40 s, 50 s, 60 s, 70 s, 80 s, 90 s, 100 s, 120 s, 140 s, 150 s, 160 s, 180 s, 200 s, 210 s, 240 s, 300 s
------------------	---