


FORCED VENTILATION FANS SINGLE PHASE – FV... = Cast Iron, FV...A = Aluminium

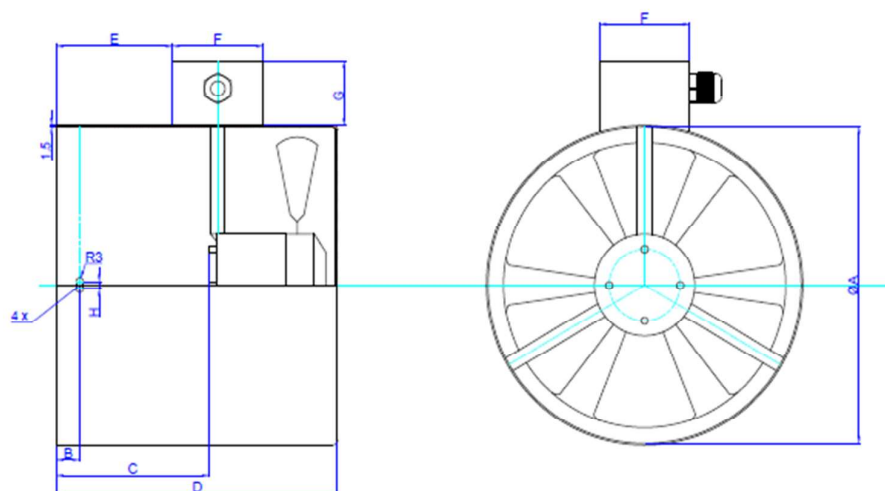

MOTOR	ØA	B	C	D	E	F	G	H	Additional Length over standard cowl
FV63A									
FV71A									
FV80A									
FV90A	180	17	102	192	71	76	47	6	
FV100A	196	15	100	200	68	74	52	6	
FV112A	231	15	110	203	75	74	52	6	
FV132A	256	19	125	230	95	74	52	6	

230V 50Hz – Single Phase							
MOTOR	SPEED (rpm)	Airflow (m3/h)	Pressure max (Pa)	Noise (dB)	CURRENT ABS (A)	POWER ABS (W)	Capacitor µF
63	2800	45	40	62	0.12	17	1
71	2800	52	50	62	0.17	30	2
80	2700	55	80	62	0.18	35	2
90	2300	91	80	65	0.2	45	3
100	2700	142	80	67	0.3	50	2
112	2400	229	80	67	0.37	66	2
132	1400	337	35	69	0.35	56	2