

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer		: IDS	
Product line		: W22 IE3 Three-Phase	Product code : 12862486
Frame : 112M Output : 4 kW Poles : 4 Frequency : 50 Hz Rated voltage : 400/690 V Rated current : 8.23/4.77 A L. R. Amperes : 57.6/33.4 A LRC : 7.0 No load current : 4.60/2.67 A Rated speed : 1450 rpm Slip : 3.33 % Rated torque : 2.69 kgfm Locked rotor torque : 229 % Breakdown torque : 310 % Insulation class : F Service factor : 1.00 Moment of inertia (J) : 0.0180 kgm ² Design : N	Locked rotor time : 27s (cold) 15s (hot) Temperature rise : 80 K Duty cycle : S1 Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55 Cooling method : IC411 - TEFC Mounting : B3T Rotation ¹ : Both (CW and CCW) Noise level ² : 56.0 dB(A) Starting method : Direct On Line Approx. weight ³ : 45.5 kg		
Output	50%	75%	100%
Efficiency (%)	88.7	89.1	88.8
Power Factor	0.60	0.72	0.79
Foundation loads		Max. traction : 140 kgf Max. compression : 186 kgf	
		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6207 ZZ	6206 ZZ
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	
Notes			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.	
Rev.	Changes Summary		Performed
			Checked
			Date
Performed by			
Checked by			
Date	27/06/2019		
		Page	Revision
		1 / 2	

VFD OPERATION CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : IDS

Product line : W22 IE3 Three-Phase

Product code : 12862486

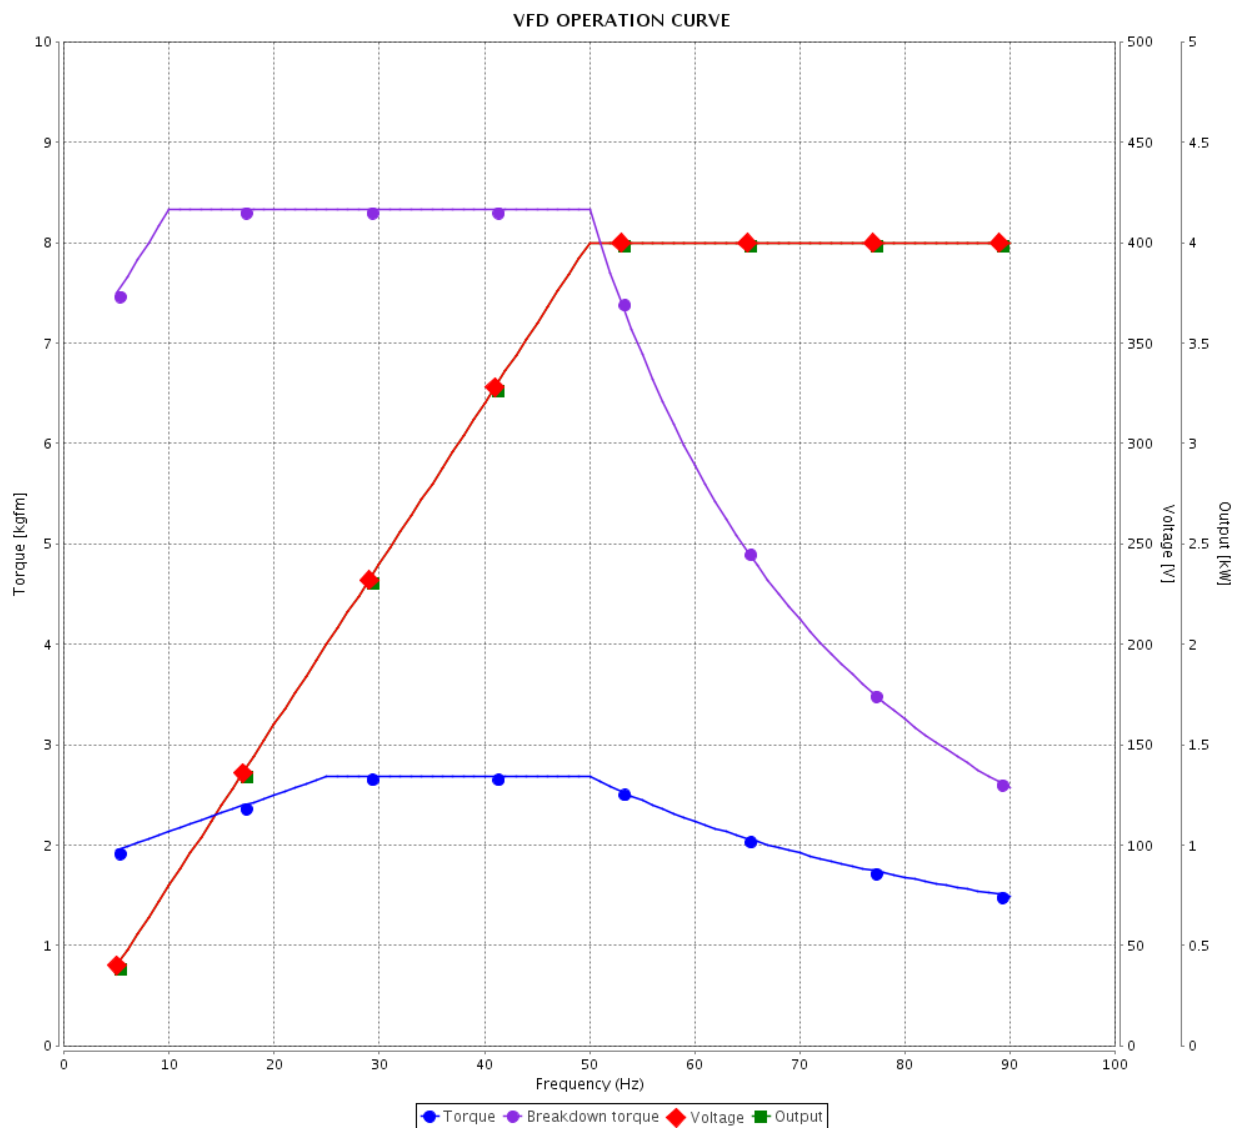

Performance : 400/690 V 50 Hz 4P

Rated current : 8.23/4.77 A
 LRC : 7.0
 Rated torque : 2.69 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 310 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0180 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					
	27/06/2019				