

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer		: IDS												
Product line		: W22 IE3 Three-Phase		Product code : 12862529										
Frame : 112M Output : 4 kW Poles : 4 Frequency : 50 Hz Rated voltage : 400/690 V Rated current : 8.23/4.77 A L. R. Amperes : 57.6/33.4 A LRC : 7.0 No load current : 4.60/2.67 A Rated speed : 1450 rpm Slip : 3.33 % Rated torque : 2.69 kgfm Locked rotor torque : 229 % Breakdown torque : 310 % Insulation class : F Service factor : 1.00 Moment of inertia (J) : 0.0180 kgm ² Design : N		Locked rotor time : 27s (cold) 15s (hot) Temperature rise : 80 K Duty cycle : S1 Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55 Cooling method : IC411 - TEFC Mounting : B5T Rotation ¹ : Both (CW and CCW) Noise level ² : 56.0 dB(A) Starting method : Direct On Line Approx. weight ³ : 46.7 kg												
Output	50%	75%	100%	Foundation loads										
Efficiency (%)	88.7	89.1	88.8	Max. traction : 140 kgf										
Power Factor	0.60	0.72	0.79	Max. compression : 186 kgf										
		<u>Drive end</u>		<u>Non drive end</u>										
Bearing type	:	6207 ZZ		6206 ZZ										
Sealing	:	Oil Seal		Oil Seal										
Lubrication interval	:	-		-										
Lubricant amount	:	-		-										
Lubricant type	:	Mobil Polyrex EM												
Notes														
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.											
Rev.	Changes Summary			Performed	Checked									
<table border="1"> <tr> <td>Performed by</td> <td></td> <td rowspan="3"></td> <td rowspan="3">Page 1 / 2</td> <td rowspan="3">Revision</td> </tr> <tr> <td>Checked by</td> <td></td> </tr> <tr> <td>Date</td> <td>27/06/2019</td> </tr> </table>						Performed by			Page 1 / 2	Revision	Checked by		Date	27/06/2019
Performed by			Page 1 / 2	Revision										
Checked by														
Date	27/06/2019													

VFD OPERATION CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : IDS

Product line : W22 IE3 Three-Phase

Product code : 12862529

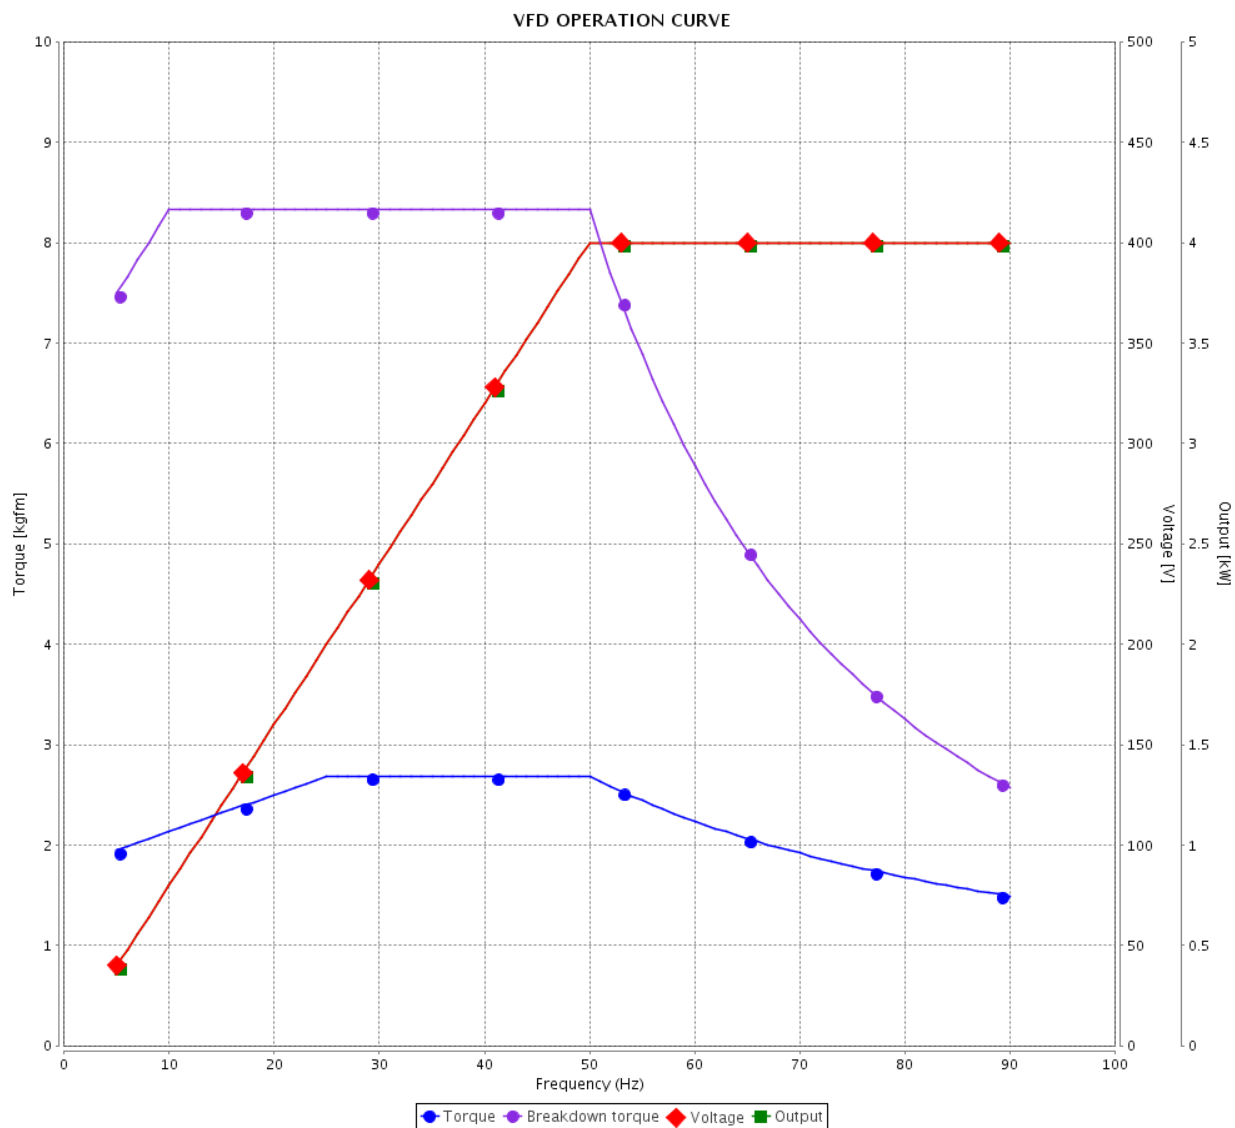

Performance : 400/690 V 50 Hz 4P

Rated current : 8.23/4.77 A
 LRC : 7.0
 Rated torque : 2.69 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 310 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.0180 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	27/06/2019				