

SK⁺/SPK⁺ –

Space-saving right-angle precision with output shaft




The representatives of our versatile hypoid gearhead with SP⁺ compatible output shaft. SPK⁺ gearheads with planetary stage are especially suitable for high-precision applications requiring higher power and torsional rigidity.

Quick size selection


SK⁺ MF (example for $i = 5$)

For applications in cyclic operation ($DC \leq 60\%$)
or continuous operation ($DC \geq 60\%$)

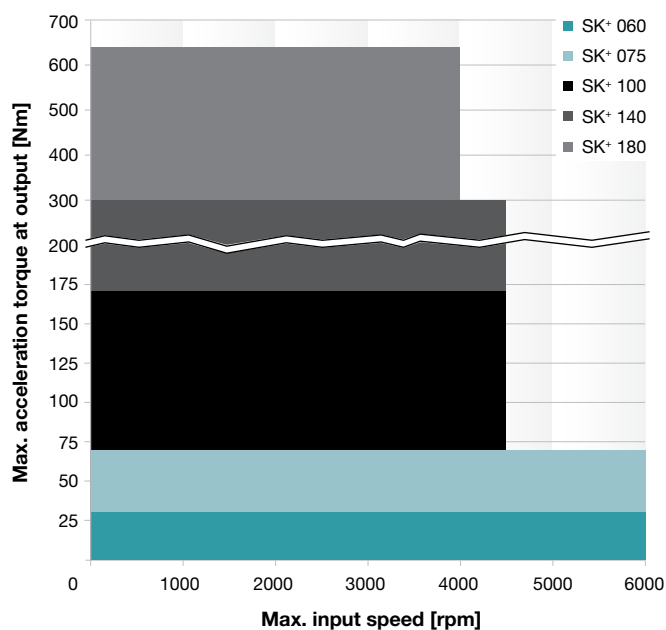

SPK⁺ MF (example for $i = 25$)

For applications in cyclic operation ($DC \leq 60\%$)
or continuous operation ($DC \geq 60\%$)

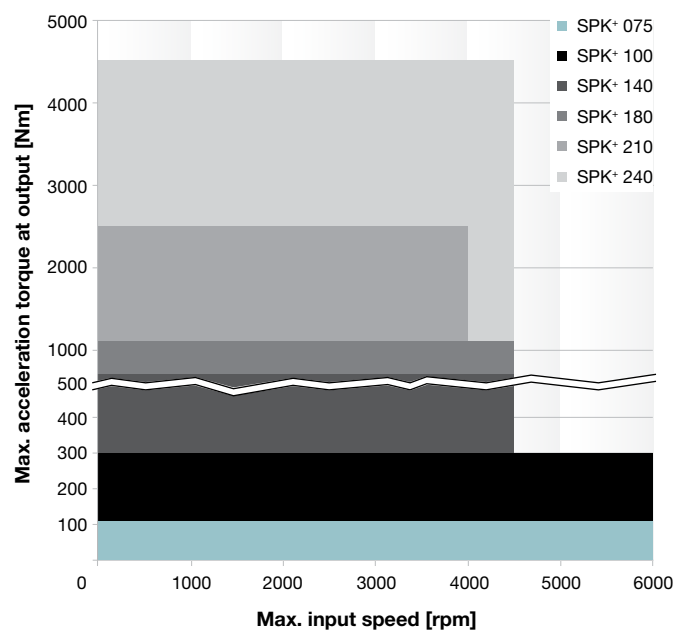

Versions and Applications

Features	SK ⁺ MF version page 204	SPK ⁺ MF version page 214
Power density	••	••
Positioning accuracy (e.g. clamped drives)	••	•••
Highly dynamic applications	••	••
Torsional rigidity	••	••

Product features

Ratios ^{c)}		3 – 100	12 – 10000
Torsional backlash [arcmin] ^{c)}	Standard	≤ 4	≤ 4
	Reduced	–	≤ 2
Output type			
Smooth output shaft		•	•
Smooth output shaft, rear side		•	•
Keywayed output shaft		•	•
Keywayed output shaft, rear side		•	•
Output shaft with involute gearing		•	•
Hollow shaft interface, rear side Connected via shrink disc		•	•
Mounted shaft Connected via shrink disc			•
Closed cover, rear side		•	•
Input type			
Motor mounted version		•	•
Type			
ATEX ^{a)}		•	
Food-grade lubrication ^{a) b)}		•	•
Corrosion resistant ^{a) b)}		•	•
Accessories			
Coupling		•	•
Rack		•	•
Pinion		•	•
Shrink disc		•	•
torqXis sensor flange		•	•
Intermediate plate for cooling connection		•	•

^{a)} Power reduction; technical data available upon request

^{b)} Please contact WITTENSTEIN alpha

^{c)} In relation to reference sizes

Right-angle gearheads
High End



SK+ 060 MF 1/2-stage

					1-stage						2-stage							
Ratio ^{a)}	<i>i</i>		3	4	5	7	10	12	16	20	25	28	35	40	50	70	100	
Max. acceleration torque (max. 1000 cycles per hour)	<i>T</i> _{2B}	Nm	30	30	30	25	20	30	30	30	30	30	30	30	30	25	20	
		in.lb	266	266	266	221	177	266	266	266	266	266	266	266	266	266	221	177
Nominal output torque (with <i>n</i> _{1N})	<i>T</i> _{2N}	Nm	22	22	22	20	15	22	22	22	22	22	22	22	22	20	15	
		in.lb	195	195	195	177	133	195	195	195	195	195	195	195	195	195	177	133
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	<i>T</i> _{2Not}	Nm	40	50	50	45	40	50	50	50	50	50	50	50	50	45	40	
		in.lb	354	443	443	398	354	443	443	443	443	443	443	443	443	443	398	354
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}	<i>n</i> _{1N}	rpm	2500	2700	3000	3000	3000	4400	4400	4400	4400	4400	4400	4400	4800	5500	5500	
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)	<i>n</i> _{1Ncym}	rpm	3000	3500	4000	3500	3500	5000	5000	5000	5000	5000	5000	5000	5000	5500	5500	
Max. input speed	<i>n</i> _{1Max}	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}	<i>T</i> ₀₁₂	Nm	1.2	1.1	1.0	1.2	1.1	0.2	0.2	0.2	0.2	0.2	0.2	0.1	0.1	0.1	0.1	
		in.lb	10.6	9.7	8.9	10.6	9.7	1.8	1.8	1.8	1.8	1.8	1.8	0.9	0.9	0.9	0.9	
Max. torsional backlash	<i>j</i> _t	arcmin	≤ 5															
Torsional rigidity	<i>C</i> _{t21}	Nm/ arcmin	2.0	2.1	2.2	2.0	1.8	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.2	2.0	1.8	
		in.lb/ arcmin	18	19	19	18	16	19	19	19	19	19	19	19	19	18	16	
Max. axial force ^{e)}	<i>F</i> _{2AMax}	N	2400															
		lb _f	540															
Max. radial force ^{e)}	<i>F</i> _{2RMax}	N	2700															
		lb _f	608															
Max. tilting moment	<i>M</i> _{2KMax}	Nm	251															
		in.lb	2220															
Efficiency at full load	η	%	96						94									
Service life (For calculation, see the Chapter "Information")	<i>L</i> _h	h	> 20000															
Weight incl. standard adapter plate	<i>m</i>	kg	2.9						3.2									
		lb _m	6.4						7.1									
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)	<i>L</i> _{PA}	dB(A)	≤ 64															
Max. permitted housing temperature		°C	+90															
		F	194															
Ambient temperature		°C	0 to +40															
		F	32 to 104															
Lubrication			Lubricated for life															
Paint			Blue RAL 5002															
Direction of rotation			Motor and gearhead opposite directions															
Protection class			IP 65															
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	B	11	<i>J</i> ₁	kgcm ²	–	–	–	–	–	0.09	0.09	0.07	0.07	0.06	0.06	0.06	0.06	0.06
				10 ⁻³ in.lb.s ²	–	–	–	–	–	0.08	0.08	0.07	0.06	0.06	0.06	0.05	0.05	0.05
	C	14	<i>J</i> ₁	kgcm ²	0.52	0.44	0.40	0.36	0.34	0.20	0.20	0.19	0.19	0.18	0.18	0.17	0.17	0.17
				10 ⁻³ in.lb.s ²	0.46	0.39	0.35	0.32	0.30	0.18	0.18	0.17	0.16	0.16	0.16	0.15	0.15	0.15
	E	19	<i>J</i> ₁	kgcm ²	0.87	0.79	0.75	0.71	0.70	–	–	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	0.77	0.70	0.66	0.63	0.62	–	–	–	–	–	–	–	–	–

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation



^{e)} Refers to center of the output shaft or flange

All technical data for front output side applies.



Technical data for rearward output versions, see page 422.

View A

1-stage:

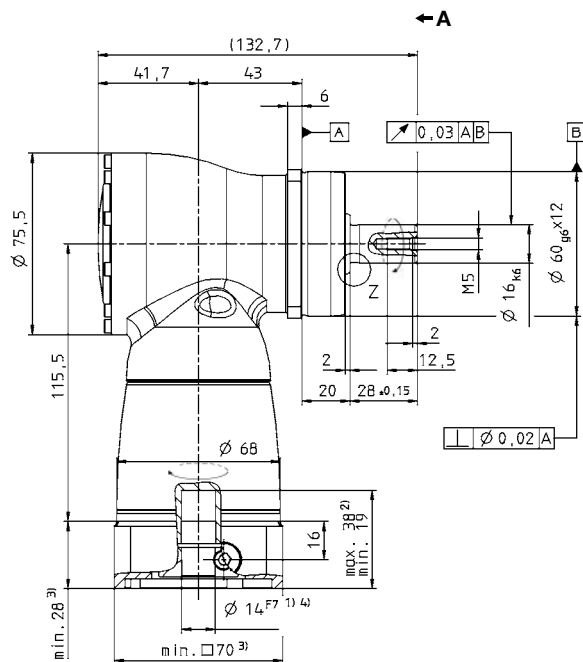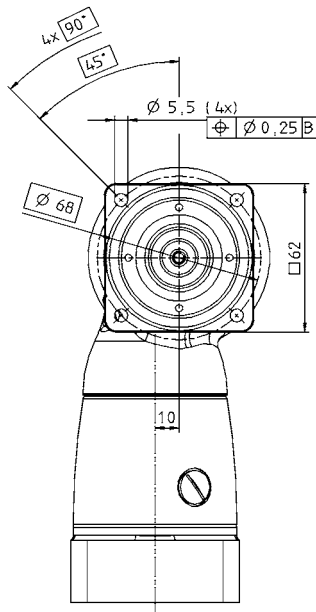


2-stage:

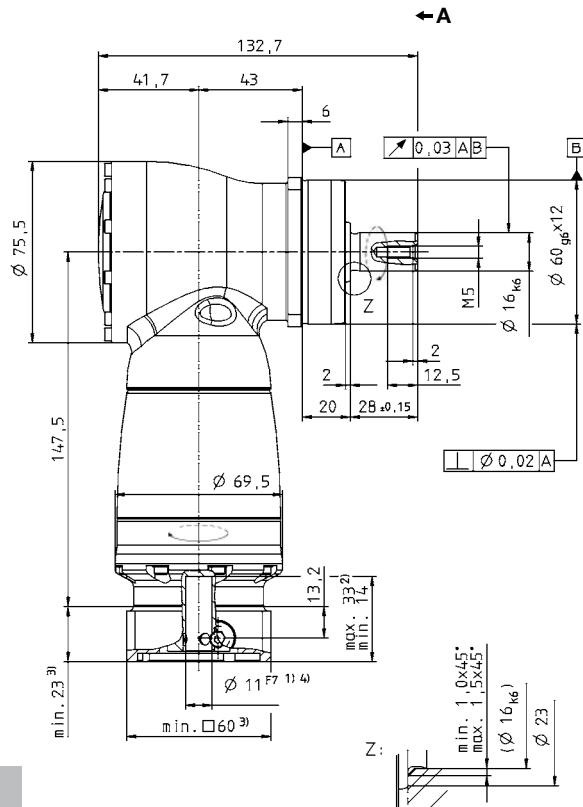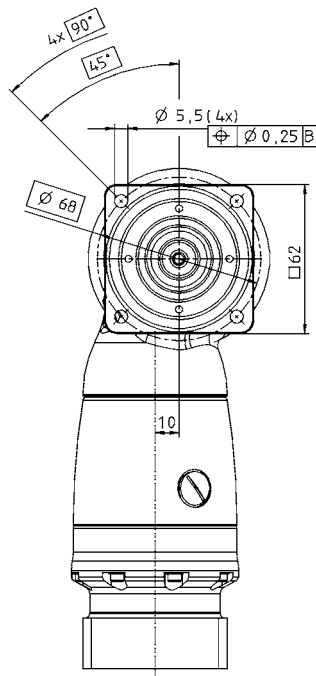


Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480
X = W 16 x 0.8 x 30 x 18 x 6 mm, DIN 5480



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>



Motor mounting according to operating manual

Right-angle gearheads
High End

SK*

SK⁺ 075 MF 1/2-stage

				1-stage					2-stage										
Ratio ^{a)}	<i>i</i>			3	4	5	7	10	12	16	20	25	28	35	40	50	70	100	
Max. acceleration torque (max. 1000 cycles per hour)	<i>T</i> _{2B}	Nm	70	70	70	60	50	70	70	70	70	70	70	70	70	70	60	50	
		in.lb	620	620	620	531	443	620	620	620	620	620	620	620	620	620	531	443	
Nominal output torque (with <i>n</i> _N)	<i>T</i> _{2N}	Nm	50	50	50	45	40	50	50	50	50	50	50	50	50	50	45	40	
		in.lb	443	443	443	398	354	443	443	443	443	443	443	443	443	443	398	354	
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	<i>T</i> _{2Not}	Nm	95	115	115	110	100	115	115	115	115	115	115	115	115	115	110	100	
		in.lb	841	1018	1018	974	885	1018	1018	1018	1018	1018	1018	1018	1018	1018	974	885	
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}	<i>n</i> _{1N}	rpm	2300	2500	2800	2800	2800	3500	3500	3500	3500	3500	3500	3500	3500	3800	4500	4500	
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)	<i>n</i> _{1Ncym}	rpm	3000	3500	4000	3500	3500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Max. input speed	<i>n</i> _{1Max}	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}	<i>T</i> ₀₁₂	Nm	2.0	1.7	1.5	2.0	1.8	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.1	0.1	0.1	0.1	
		in.lb	18	15	13	18	16	2.7	2.7	1.8	1.8	1.8	1.8	1.8	0.9	0.9	0.9	0.9	
Max. torsional backlash	<i>j</i> _t	arcmin	≤ 4																
Torsional rigidity	<i>C</i> _{t21}	Nm/ arcmin	5.0	5.5	6.0	6.0	6.0	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5	6.0	6.0	6.0	
		in.lb/ arcmin	44	49	53	53	53	49	49	49	49	49	49	49	49	53	53	53	
Max. axial force ^{e)}	<i>F</i> _{2AMax}	N	3400																
		lb _f	765																
Max. radial force ^{e)}	<i>F</i> _{2RMax}	N	4000																
		lb _f	900																
Max. tilting moment	<i>M</i> _{2KMax}	Nm	437																
		in.lb	3867																
Efficiency at full load	η	%	96					94											
Service life (For calculation, see the Chapter "Information")	<i>L</i> _h	h	> 20000																
Weight incl. standard adapter plate	<i>m</i>	kg	4.8					5.4											
		lb _m	10.6					11.9											
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)	<i>L</i> _{PA}	dB(A)	≤ 66																
Max. permitted housing temperature		°C	+90																
		F	194																
Ambient temperature		°C	0 to +40																
		F	32 to 104																
Lubrication			Lubricated for life																
Paint			Blue RAL 5002																
Direction of rotation			Motor and gearhead opposite directions																
Protection class			IP 65																
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	<i>J</i> ₁	kgcm ²	–	–	–	–	–	0.28	0.27	0.23	0.23	0.20	0.20	0.18	0.18	0.18	0.18
				10 ⁻³ in.lb.s ²	–	–	–	–	–	0.25	0.24	0.21	0.20	0.18	0.18	0.16	0.16	0.16	0.16
	E	19	<i>J</i> ₁	kgcm ²	1.46	1.19	1.06	0.95	0.90	0.73	0.71	0.68	0.67	0.63	0.62	0.63	0.63	0.63	0.63
				10 ⁻³ in.lb.s ²	1.29	1.05	0.94	0.84	0.79	0.64	0.63	0.60	0.59	0.55	0.55	0.56	0.55	0.55	0.55
	H	28	<i>J</i> ₁	kgcm ²	2.88	2.61	2.47	2.37	2.31	–	–	–	–	–	–	–	–	–	–
				10 ⁻³ in.lb.s ²	2.55	2.31	2.19	2.10	2.04	–	–	–	–	–	–	–	–	–	–

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation


^{e)} Refers to center of the output shaft or flange

All technical data for front output side applies.


Technical data for rearward output versions, see page 422.

View A


1-stage:

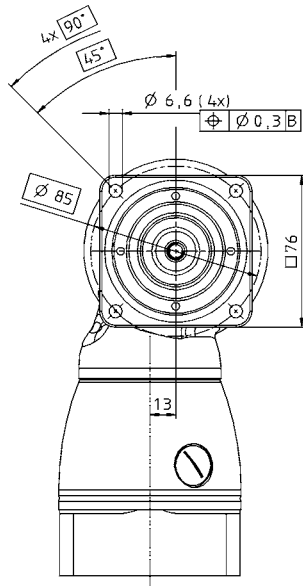


← A

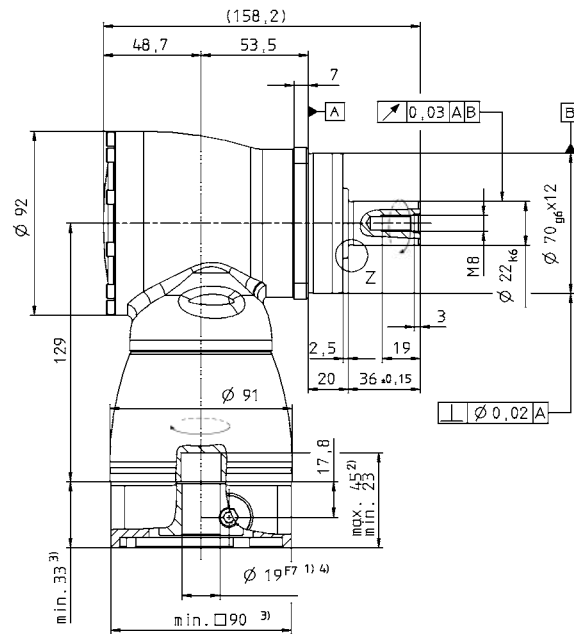

2-stage:

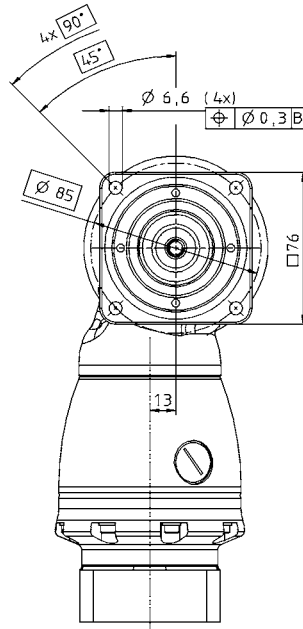


← A

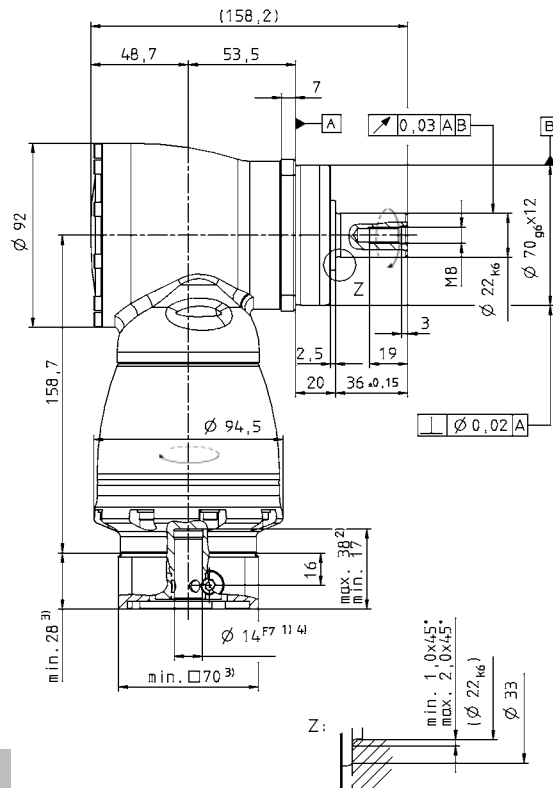

Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A

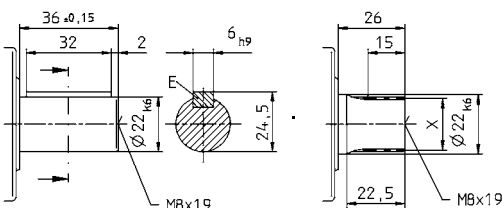

Involute gearing DIN 5480 in mm
X = W 22 x 1.25 x 30 x 16 x 6 mm

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>



Motor mounting according to operating manual

Right-angle gearheads
High End

SK*

SK⁺ 100 MF 1/2-stage

				1-stage					2-stage														
Ratio ^{a)}				<i>i</i>		3	4	5	7	10	12	16	20	25	28	35	40	50	70	100			
Max. acceleration torque (max. 1000 cycles per hour)				<i>T</i> _{2B}	Nm	170	170	170	145	125	170	170	170	170	170	170	170	170	145	125			
					in.lb	1505	1505	1505	1283	1106	1505	1505	1505	1505	1505	1505	1505	1505	1505	1283	1106		
Nominal output torque (with <i>n</i> _{1N})				<i>T</i> _{2N}	Nm	100	100	100	90	80	100	100	100	100	100	100	100	100	90	80			
					in.lb	885	885	885	797	708	885	885	885	885	885	885	885	885	885	797	708		
Emergency stop torque (permitted 1000 times during the service life of the gearhead)				<i>T</i> _{2Not}	Nm	220	260	260	255	250	260	260	260	260	260	260	260	260	255	250			
					in.lb	1947	2301	2301	2257	2213	2301	2301	2301	2301	2301	2301	2301	2301	2301	2257	2213		
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}				<i>n</i> _{1N}	rpm	2200	2400	2700	2500	2500	3100	3100	3100	3100	3100	3100	3100	3500	4200	4200			
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)				<i>n</i> _{1Ncym}	rpm	3000	3400	3800	3400	3400	4000	4000	4000	4000	4000	4000	4000	4000	4200	4200			
Max. input speed				<i>n</i> _{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500			
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}				<i>T</i> ₀₁₂	Nm	3.8	3.0	2.3	3.5	2.8	0.6	0.6	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2			
					in.lb	34	27	20	31	25	5.3	5.3	4.4	3.5	3.5	2.7	1.8	1.8	1.8	1.8	1.8		
Max. torsional backlash				<i>j</i> _t	arcmin	≤ 4																	
Torsional rigidity				<i>C</i> _{t21}	Nm/ arcmin	10	11	13	13	13	11	11	11	11	11	11	11	11	13	13	13		
					in.lb/ arcmin	89	97	115	115	115	97	97	97	97	97	97	97	97	97	115	115	115	
Max. axial force ^{e)}				<i>F</i> _{2AMax}	N	5700																	
					lb _f	1283																	
Max. radial force ^{e)}				<i>F</i> _{2RMax}	N	6300																	
					lb _f	1418																	
Max. tilting moment				<i>M</i> _{2KMax}	Nm	833																	
					in.lb	7370																	
Efficiency at full load				η	%	96					94												
Service life (For calculation, see the Chapter "Information")				<i>L</i> _h	h	> 20000																	
Weight incl. standardadapter plate				<i>m</i>	kg	9.3					10.0												
					lb _m	21					22												
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)				<i>L</i> _{PA}	dB(A)	≤ 66																	
Max. permitted housing temperature					°C	+90																	
					F	194																	
Ambient temperature					°C	0 to +40																	
					F	32 to 104																	
Lubrication					Lubricated for life																		
Paint					Blue RAL 5002																		
Direction of rotation					Motor and gearhead opposite directions																		
Protection class					IP 65																		
Moment of inertia (relates to the drive) Clamping hub diameter [mm]				E	19	<i>J</i> ₁	kgcm ²	–	–	–	–	–	1.02	0.97	0.86	0.84	0.75	0.74	0.69	0.69	0.68	0.68	
							10 ⁻³ in.lb.s ²	–	–	–	–	–	0.91	0.86	0.76	0.74	0.66	0.66	0.61	0.61	0.60	0.60	
				G	24	<i>J</i> ₁	kgcm ²	–	–	–	–	–	2.59	2.54	2.42	2.40	2.31	2.30	2.26	2.25	2.25	2.25	
							10 ⁻³ in.lb.s ²	–	–	–	–	–	2.29	2.25	2.14	2.13	2.05	2.04	2.00	1.99	1.99	1.99	
				H	28	<i>J</i> ₁	kgcm ²	4.64	3.80	3.34	2.98	2.79	–	–	–	–	–	–	–	–	–	–	–
							10 ⁻³ in.lb.s ²	4.10	3.36	2.95	2.64	2.47	–	–	–	–	–	–	–	–	–	–	–
				K	38	<i>J</i> ₁	kgcm ²	11.9	11.0	10.6	10.2	10.0	–	–	–	–	–	–	–	–	–	–	–
							10 ⁻³ in.lb.s ²	10.5	9.77	9.37	9.05	8.89	–	–	–	–	–	–	–	–	–	–	–

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation


^{e)} Refers to center of the output shaft or flange

All technical data for front output side applies.


Technical data for rearward output versions, see page 422.

View A


1-stage:

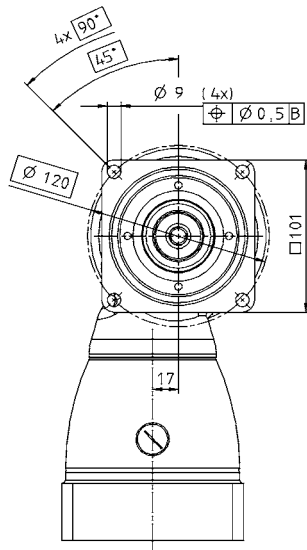


← A

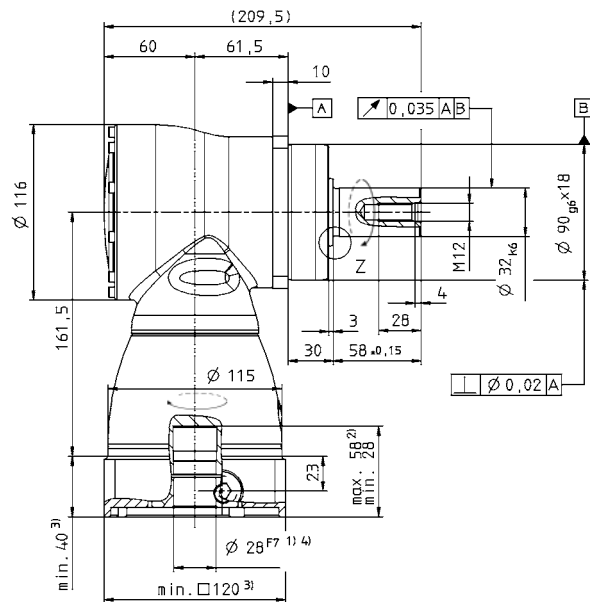

2-stage:

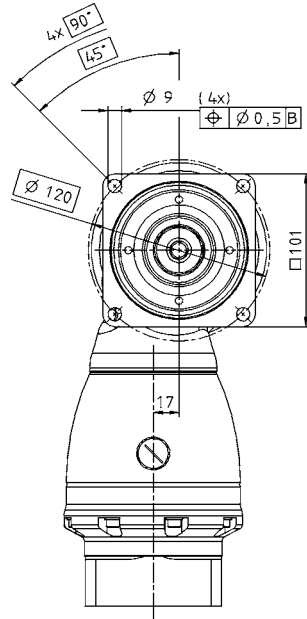


← A

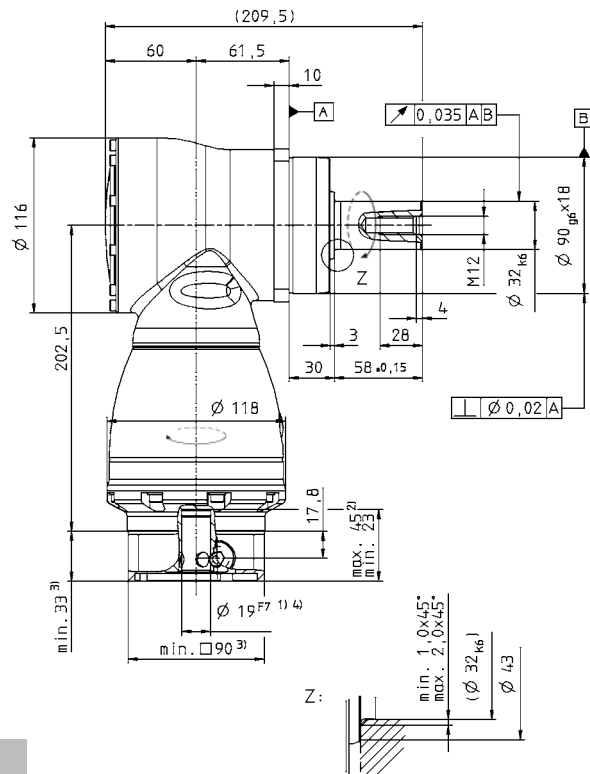

Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A

Involute gearing DIN 5480
X = W 32 x 1.25 x 30 x 24 x 6 mm

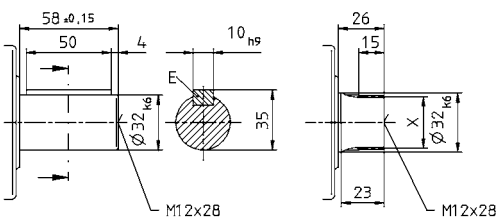

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>



Motor mounting according to operating manual

Right-angle gearheads
High End

SK*

SK⁺ 140 MF 1/2-stage

				1-stage					2-stage													
Ratio ^{a)}				<i>i</i>		3	4	5	7	10	12	16	20	25	28	35	40	50	70	100		
Max. acceleration torque (max. 1000 cycles per hour)				<i>T</i> _{2B}	Nm	300	300	300	250	210	300	300	300	300	300	300	300	300	250	210		
					in.lb	2655	2655	2655	2213	1859	2655	2655	2655	2655	2655	2655	2655	2655	2655	2213	1859	
Nominal output torque (with <i>n</i> _{2N})				<i>T</i> _{2N}	Nm	190	190	190	175	160	190	190	190	190	190	190	190	190	175	160		
					in.lb	1682	1682	1682	1549	1416	1682	1682	1682	1682	1682	1682	1682	1682	1682	1549	1419	
Emergency stop torque (permitted 1000 times during the service life of the gearhead)				<i>T</i> _{2Not}	Nm	400	500	500	450	400	500	500	500	500	500	500	500	500	450	400		
					in.lb	3540	4425	4425	3983	3540	4425	4425	4425	4425	4425	4425	4425	4425	4425	3983	3540	
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}				<i>n</i> _{1N}	rpm	1900	2000	2200	2000	2000	2900	2900	2900	2900	2900	2900	2900	3200	3200	3900		
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)				<i>n</i> _{1Ncym}	rpm	2500	2800	3100	2800	2800	4000	4000	4000	4000	4000	4000	4000	4200	4200	4200		
Max. input speed				<i>n</i> _{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500		
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}				<i>T</i> ₀₁₂	Nm	7.0	5.2	4.5	7.5	5.5	1.4	0.9	0.7	0.5	0.5	0.4	0.4	0.3	0.3	0.3		
					in.lb	62	46	40	66	49	12.4	8	6.2	4.4	4.4	3.5	3.5	2.7	2.7	2.7	2.7	
Max. torsional backlash				<i>j</i> _t	arcmin	≤ 4																
Torsional rigidity				<i>C</i> _{t21}	Nm/ arcmin	27	30	32	32	32	29	29	29	29	29	29	29	29	31	31	31	
					in.lb/ arcmin	239	266	283	283	283	257	257	257	257	257	257	257	257	257	274	274	274
Max. axial force ^{e)}				<i>F</i> _{2AMax}	N	9900																
					lb _f	2228																
Max. radial force ^{e)}				<i>F</i> _{2RMax}	N	9500																
					lb _f	2138																
Max. tilting moment				<i>M</i> _{2KMax}	Nm	1692																
					in.lb	14974																
Efficiency at full load				η	%		96					94										
Service life (For calculation, see the Chapter "Information")				<i>L</i> _h	h		> 20000															
Weight incl. standardadapter plate				<i>m</i>	kg	22.6					25.0											
					lb _m	50					55											
Operating noise (with <i>n</i> ₁ = 3000 rpm without load)				<i>L</i> _{PA}	dB(A)		≤ 68															
Max. permitted housing temperature					°C	+90																
					F	194																
Ambient temperature					°C	0 to +40																
					F	32 to 104																
Lubrication					Lubricated for life																	
Paint					Blue RAL 5002																	
Direction of rotation					Motor and gearhead opposite directions																	
Protection class					IP 65																	
Moment of inertia (relates to the drive) Clamping hub diameter [mm]				G	24	<i>J</i> _i	kgcm ²	–	–	–	–	–	4.21	3.85	3.28	3.17	2.78	2.73	2.48	2.46	2.43	2.42
							10 ⁻³ in.lb.s ²	–	–	–	–	–	3.73	3.41	2.90	2.80	2.46	2.41	2.20	2.17	2.15	2.14
				K	38	<i>J</i> _i	kgcm ²	25.0	19.1	16.3	14.1	12.8	11.1	10.7	10.2	10.1	9.69	9.64	9.39	9.37	9.34	9.33
							10 ⁻³ in.lb.s ²	22.1	16.9	14.4	12.4	11.3	9.83	9.51	9.01	8.92	8.58	8.53	8.31	8.29	8.27	8.26

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange


All technical data for front output side applies.

Technical data for rearward output versions, see page 422.


Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A


1-stage:

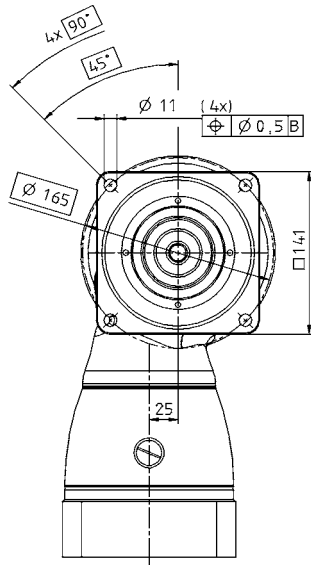


← A

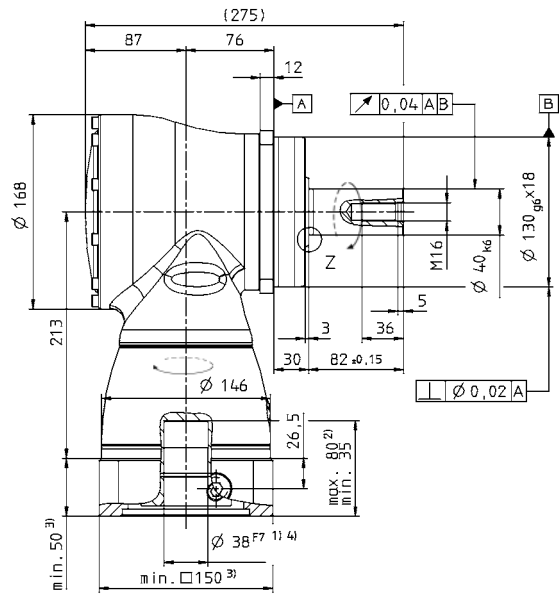

2-stage:

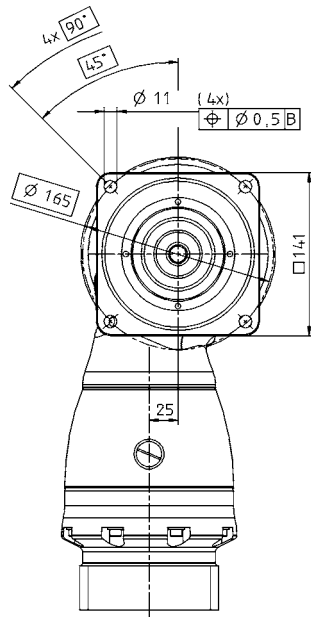


← A

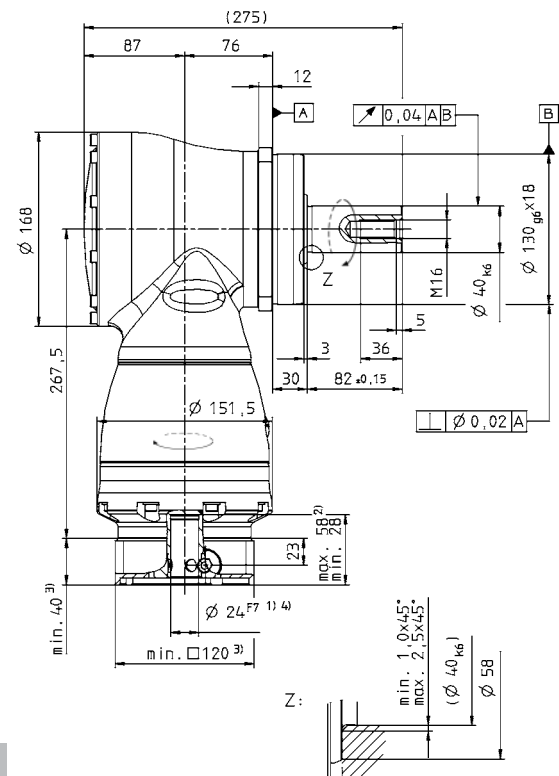

Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A

Involute gearing DIN 5480
X = W 40 x 2 x 30 x 18 x 6 mm

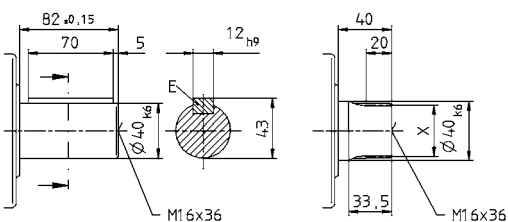

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>



Motor mounting according to operating manual

Right-angle gearheads
High End

SK

SK⁺ 180 MF 1/2-stage

				1-stage					2-stage													
Ratio ^{a)}				<i>i</i>		3	4	5	7	10	12	16	20	25	28	35	40	50	70	100		
Max. acceleration torque (max. 1000 cycles per hour)				<i>T</i> _{2B}	Nm	640	640	640	550	470	640	640	640	640	640	640	640	640	550	470		
					in.lb	5664	5664	5664	4868	4160	5664	5664	5664	5664	5664	5664	5664	5664	5664	5664	4868	4160
Nominal output torque (with <i>n</i> _{2N})				<i>T</i> _{2N}	Nm	400	400	400	380	360	400	400	400	400	400	400	400	400	380	360		
					in.lb	3540	3540	3540	3363	3186	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3363	3186
Emergency stop torque (permitted 1000 times during the service life of the gearhead)				<i>T</i> _{2Not}	Nm	900	1050	1050	970	900	1050	1050	1050	1050	1050	1050	1050	1050	970	900		
					in.lb	7965	9293	9293	8585	7965	9293	9293	9293	9293	9293	9293	9293	9293	9293	9293	8585	7965
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}				<i>n</i> _{1N}	rpm	1600	1800	2000	1800	1800	2700	2700	2700	2700	2700	2700	2700	2900	3200	3400		
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)				<i>n</i> _{1Ncym}	rpm	2000	2400	2800	2500	2500	3500	3500	3500	3500	3500	3500	3500	3500	3800	3800		
Max. input speed				<i>n</i> _{1Max}	rpm	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000		
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}				<i>T</i> ₀₁₂	Nm	14.5	12.0	10.0	15.0	12.5	3.0	2.3	1.8	1.6	1.3	1.2	0.9	0.9	0.9	0.9		
					in.lb	128	106	89	133	111	26.6	20.4	15.9	14.2	11.5	10.6	8.0	8.0	8.0	8.0	8.0	
Max. torsional backlash				<i>j</i> _t	arcmin	≤ 4																
Torsional rigidity				<i>C</i> _{t21}	Nm/ arcmin	64	71	79	78	77	71	71	71	71	71	71	71	71	78	78	78	
					in.lb/ arcmin	566	628	699	690	681	628	628	628	628	628	628	628	628	628	690	690	690
Max. axial force ^{e)}				<i>F</i> _{2AMax}	N	14200																
					lb _f	3195																
Max. radial force ^{e)}				<i>F</i> _{2RMMax}	N	14700																
					lb _f	3308																
Max. tilting moment				<i>M</i> _{2KMax}	Nm	3213																
					in.lb	28435																
Efficiency at full load				η	%		96					94										
Service life (For calculation, see the Chapter "Information")				<i>L</i> _h	h		> 20000															
Weight incl. standardadapter plate				<i>m</i>	kg	45.4					48											
					lb _m	100					106											
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)				<i>L</i> _{PA}	dB(A)		≤ 68															
Max. permitted housing temperature					°C	+90																
					F	194																
Ambient temperature					°C	0 to +40																
					F	32 to 104																
Lubrication					Lubricated for life																	
Paint					Blue RAL 5002																	
Direction of rotation					Motor and gearhead opposite directions																	
Protection class					IP 65																	
Moment of inertia (relates to the drive) Clamping hub diameter [mm]				K	38	<i>J</i> _i	kgcm ²	–	–	–	–	–	15.3	14.0	12.3	12.0	10.9	10.7	10.1	10.0	9.95	9.91
							10 ⁻³ in.lb.s ²	–	–	–	–	–	13.6	12.3	10.9	10.6	9.65	9.48	8.96	8.88	8.81	8.77
				M	48	<i>J</i> _i	kgcm ²	73.3	51.6	42.1	34.0	29.7	30.0	28.7	27.1	26.7	25.6	25.4	24.8	24.7	24.7	24.7
10 ⁻³ in.lb.s ²	64.9	45.6	37.3				30.1	26.3	26.6	25.4	23.9	23.6	22.7	22.5	22.0	21.9	21.8	21.8				

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation



^{e)} Refers to center of the output shaft or flange

All technical data for front output side applies.



Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

←A

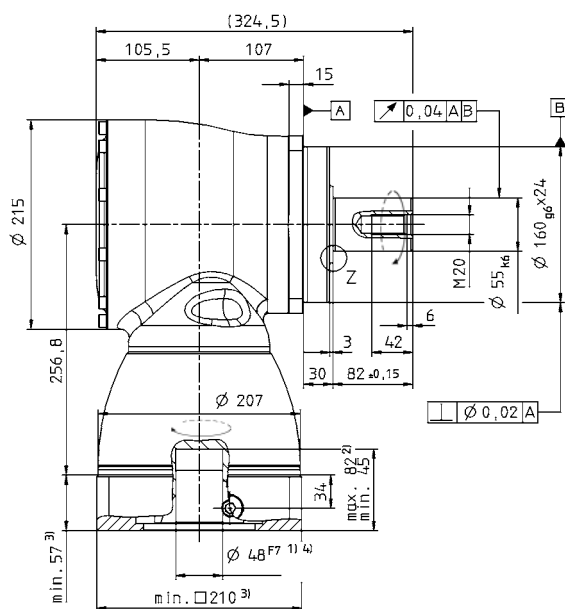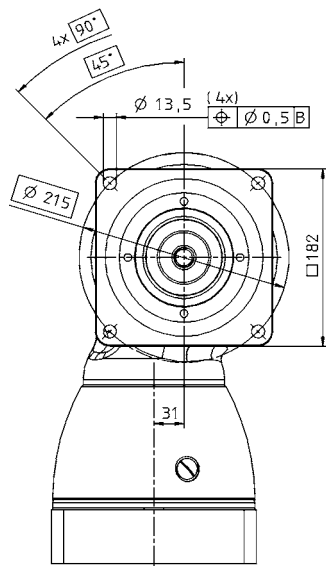

← A

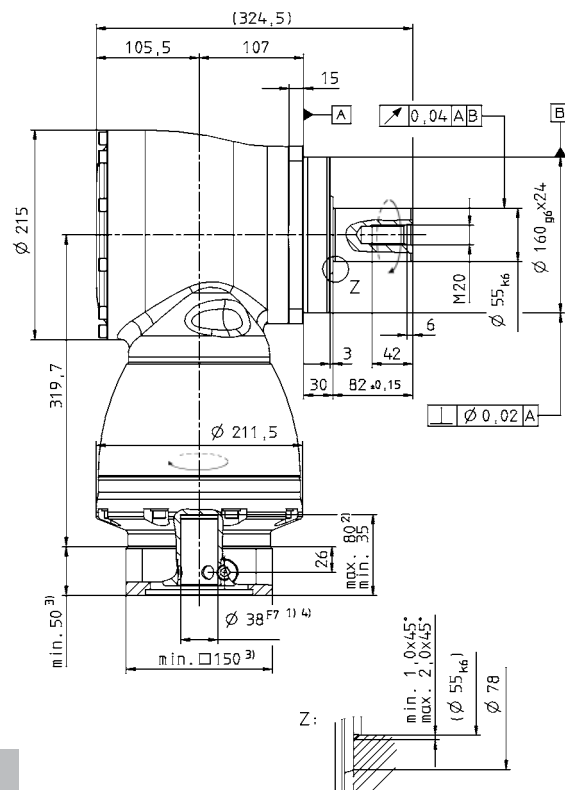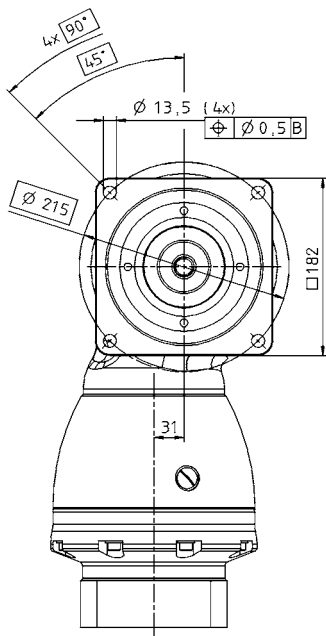

Right-angle gearheads High End

SK⁺

213

SPK+ 075 MF 2-stage

					2-stage									
Ratio ^{a)}	<i>i</i>		12	16	20	25	28	35	40	50	70	100		
Max. acceleration torque (max. 1000 cycles per hour)	<i>T</i> _{2B}	Nm	110	110	110	110	110	110	80	100	110	90		
		in.lb	974	974	974	974	974	974	974	885	974	797		
Nominal output torque (with <i>n</i> _{1N})	<i>T</i> _{2N}	Nm	75	75	75	75	75	75	60	75	75	52		
		in.lb	664	664	664	664	664	664	664	531	664	664	460	
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	<i>T</i> _{2Not}	Nm	160	160	200	200	250	175	120	150	210	200		
		in.lb	1416	1416	1770	1770	2213	1549	1062	1328	1859	1770		
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}	<i>n</i> _{1N}	rpm	2000	2400	2400	2700	2400	2500	2500	2500	2500	2500		
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)	<i>n</i> _{1Ncym}	rpm	3000	3400	3400	3800	3400	3200	3200	3200	3200	3200		
Max. input speed	<i>n</i> _{1Max}	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000		
Mean no load running torque (with <i>n</i> ₁ =3000 rpm and 20°C gearhead temperature) ^{d)}	<i>T</i> ₀₁₂	Nm	1.5	1.3	1.2	1.2	1.2	1.3	1.3	1.3	1.3	1.3		
		in.lb	13.3	11.5	10.6	10.6	10.6	11.5	11.5	11.5	11.5	11.5		
Max. torsional backlash	<i>j</i> _t	arcmin	Standard ≤ 5 / Reduced ≤ 3											
Torsional rigidity	<i>C</i> _{t21}	Nm/ arcmin	10											
		in.lb/ arcmin	89											
Max. axial force ^{e)}	<i>F</i> _{2AMax}	N	3350											
		lb _f	753											
Max. radial force ^{e)}	<i>F</i> _{2RMax}	N	4000											
		lb _f	900											
Max. tilting moment	<i>M</i> _{2KMax}	Nm	236											
		in.lb	2089											
Efficiency at full load	η	%	94											
Service life (For calculation, see the Chapter "Information")	<i>L</i> _h	h	> 20000											
Weight incl. standard adapter plate	<i>m</i>	kg	5.2											
		lb _m	11.5											
Operating noise (with <i>n</i> ₁ =3000 rpm no load)	<i>L</i> _{PA}	dB(A)	≤ 66											
Max. permitted housing temperature		°C	+90											
		F	194											
Ambient temperature		°C	0 to +40											
		F	32 to 104											
Lubrication			Lubricated for life											
Paint			Blue RAL 5002											
Direction of rotation			Motor and gearhead opposite directions											
Protection class			IP 65											
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	<i>J</i> ₁	kgcm ²	0.54	0.45	0.44	0.40	0.44	0.36	0.35	0.34	0.34	0.34
				10 ⁻³ in.lb.s ²	0.48	0.40	0.39	0.35	0.39	0.32	0.31	0.30	0.30	0.30
	E	19	<i>J</i> ₁	kgcm ²	0.89	0.80	0.79	0.75	0.79	0.71	0.70	0.70	0.69	0.69
				10 ⁻³ in.lb.s ²	0.79	0.71	0.70	0.66	0.70	0.63	0.62	0.62	0.62	0.61

^{a)} Other ratios up to i=1000 available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

2-stage:

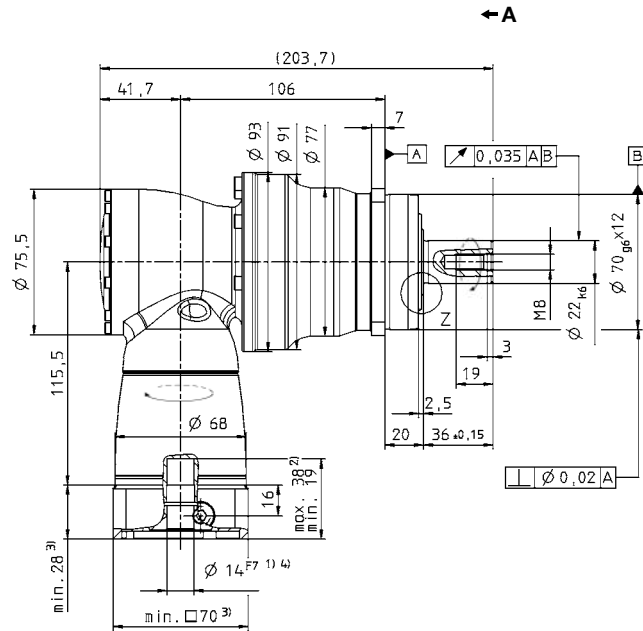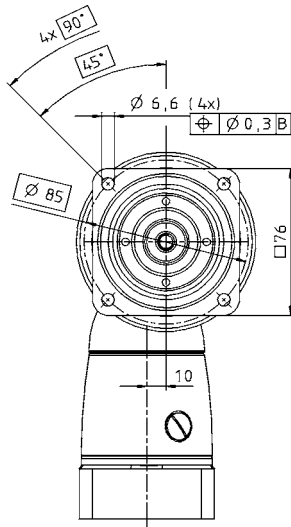


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants


Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 22 x 1.25 x 30 x 16 x 6m, DIN 5480



Shaft mounted
Mounted via shrink disc



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ±1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>

Motor mounting according to operating manual

SPK+ 075 MF 3-stage

		3-stage														
Ratio ^{a)}	<i>i</i>		64	84	100	125	140	175	200	250	280	350	400	500	700	1000
Max. acceleration torque (max. 1000 cycles per hour)	T_{2B}	Nm	110	110	110	110	110	110	110	110	110	110	80	100	110	90
		in.lb	974	974	974	974	974	974	974	974	974	974	708	885	974	797
Nominal output torque (with n_{1N})	T_{2N}	Nm	75	75	75	75	75	75	75	75	75	75	60	75	75	52
		in.lb	664	664	664	664	664	664	664	664	664	664	531	664	664	460
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	T_{2Not}	Nm	160	160	200	200	200	200	200	200	250	175	120	150	210	200
		in.lb	1416	1416	1770	1770	1770	1770	1770	1770	2213	1549	1062	1328	1859	1770
Nominal input speed (with T_{2N} and 20°C ambient temperature) ^{b), c)}	n_{1N}	rpm	4400	4400	4400	4400	4400	4400	4400	4800	4400	4800	5500	5500	5500	5500
Max. continuous speed (with 20% T_{2N} and 20°C ambient temperature)	n_{1Ncym}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5500	5500	5500	5500
Max. input speed	n_{1Max}	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
Mean no load running torque (with $n_1=3000$ rpm and 20°C gearhead temperature) ^{d)}	T_{012}	Nm	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		in.lb	2.7	2.7	2.7	2.7	2.7	2.7	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
Max. torsional backlash	j_t	arcmin	Standard ≤ 5 / Reduced ≤ 3													
Torsional rigidity	C_{t21}	Nm/ arcmin	10													
		in.lb/ arcmin	89													
Max. axial force ^{e)}	F_{2AMax}	N	3350													
		lb _f	754													
Max. radial force ^{e)}	F_{2RMax}	N	4000													
		lb _f	900													
Max. tilting moment	M_{2KMax}	Nm	236													
		in.lb	2089													
Efficiency at full load	η	%	92													
Service life (For calculation, see the Chapter "Information")	L_h	h	> 20000													
Weight incl. standard adapter plate	m	kg	5.5													
		lb _m	12.2													
Operating noise (with $n_1=3000$ rpm no load)	L_{PA}	dB(A)	≤ 66													
Max. permitted housing temperature		°C	+90													
		F	194													
Ambient temperature		°C	0 to +40													
		F	32 to 104													
Lubrication			Lubricated for life													
Paint			Blue RAL 5002													
Direction of rotation			Motor and gearhead opposite directions													
Protection class			IP 65													
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	B	11	J_1	kgcm ²	0.09	0.07	0.08	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06
				10 ⁻³ in.lb.s ²	0.08	0.06	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
	C	14	J_1	kgcm ²	0.20	0.18	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17	0.17	0.17
				10 ⁻³ in.lb.s ²	0.18	0.16	0.17	0.17	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.15

^{a)} Other ratios up to i=1000 available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

3-stage:

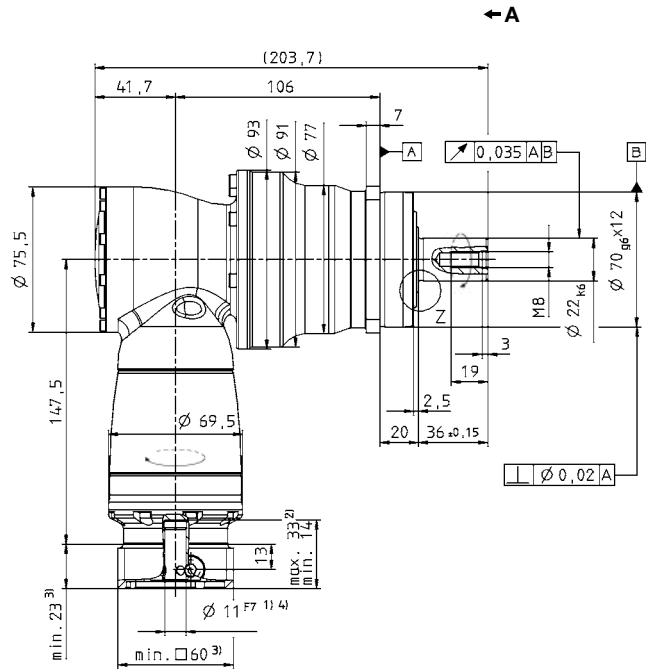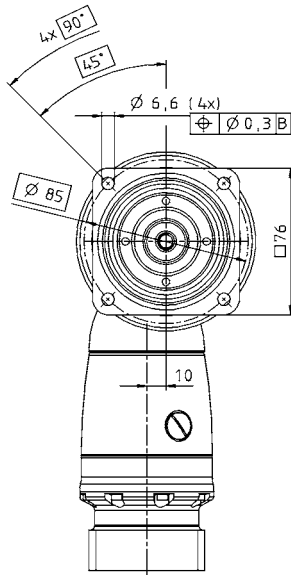


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants


Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 22 x 1.25 x 30 x 16 x 6m, DIN 5480



Shaft mounted
Mounted via shrink disc



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>

Motor mounting according to operating manual

SPK+ 100 MF 2-stage

					2-stage									
Ratio ^{a)}			<i>i</i>		12	16	20	25	28	35	40	50	70	100
Max. acceleration torque (max. 1000 cycles per hour)			<i>T</i> _{2B}	Nm	280	280	300	300	300	300	200	250	300	225
				in.lb	2478	2478	2655	2655	2655	2655	1770	2213	2655	1991
Nominal output torque (with <i>n</i> _{1N})			<i>T</i> _{2N}	Nm	180	180	175	175	170	175	160	175	170	120
				in.lb	1593	1593	1549	1549	1505	1549	1416	1549	1505	1062
Emergency stop torque (permitted 1000 times during the service life of the gearhead)			<i>T</i> _{2Not}	Nm	400	400	500	500	625	500	400	500	625	500
				in.lb	3540	3540	4425	4425	5531	4425	3540	4425	5531	4425
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}			<i>n</i> _{1N}	rpm	2000	2400	2400	2700	2400	2500	2500	2500	2500	2500
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)			<i>n</i> _{1Ncym}	rpm	3000	3400	3400	3800	3400	3200	3200	3200	3200	3200
Max. input speed			<i>n</i> _{1Max}	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
Mean no load running torque (with <i>n</i> ₁ =3000 rpm and 20°C gearhead temperature) ^{d)}			<i>T</i> ₀₁₂	Nm	2.5	2.1	2.0	1.8	2.0	2.2	2.0	2.0	2.0	2.0
				in.lb	22.1	18.6	17.7	15.9	17.7	19.5	17.7	17.7	17.7	17.7
Max. torsional backlash			<i>j</i> _t	arcmin	Standard ≤ 4 / Reduced ≤ 2									
Torsional rigidity			<i>C</i> _{t21}	Nm/ arcmin	31									
				in.lb/ arcmin	274									
Max. axial force ^{e)}			<i>F</i> _{2AMax}	N	5650									
				lb _f	1271									
Max. radial force ^{e)}			<i>F</i> _{2RMMax}	N	6300									
				lb _f	1418									
Max. tilting moment			<i>M</i> _{2KMax}	Nm	487									
				in.lb	4310									
Efficiency at full load			η	%	94									
Service life (For calculation, see the Chapter "Information")			<i>L</i> _h	h	> 20000									
Weight incl. standard adapter plate			<i>m</i>	kg	9.7									
				lb _m	21.4									
Operating noise (with <i>n</i> ₁ =3000 rpm no load)			<i>L</i> _{PA}	dB(A)	≤ 68									
Max. permitted housing temperature				°C	+90									
				F	194									
Ambient temperature				°C	0 to +40									
				F	32 to 104									
Lubrication			Lubricated for life											
Paint			Blue RAL 5002											
Direction of rotation			Motor and gearhead opposite directions											
Protection class			IP 65											
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	<i>J</i> ₁	kgcm ²	1.48	1.20	1.17	1.05	1.15	0.95	0.90	0.89	0.89	0.89
				10 ⁻³ in.lb.s ²	1.31	1.06	1.04	0.93	1.02	0.84	0.79	0.79	0.79	0.78
	H	28	<i>J</i> ₁	kgcm ²	2.89	2.62	2.59	2.46	2.56	2.36	2.31	2.31	2.30	2.30
				10 ⁻³ in.lb.s ²	2.56	2.31	2.29	2.18	2.27	2.09	2.05	2.04	2.04	2.04

^{a)} Other ratios up to $i=1000$ available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

2-stage:

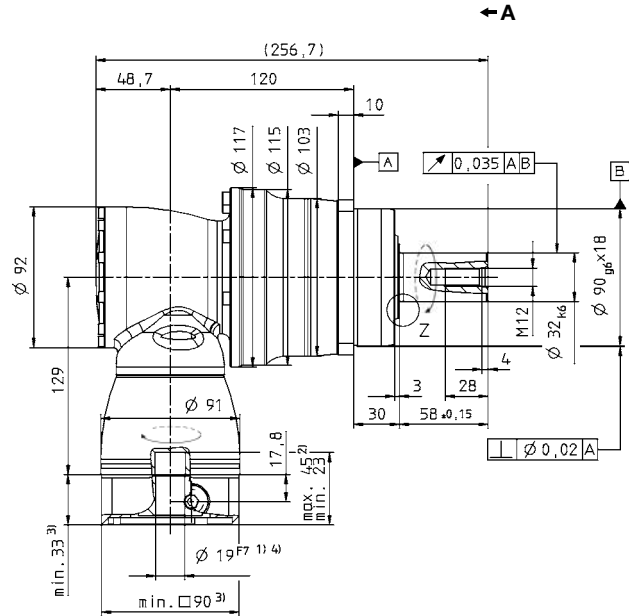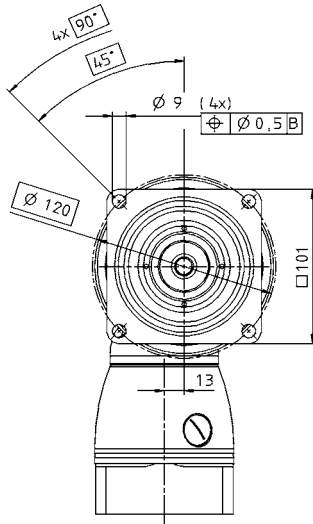


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants


Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 32 x 1.25 x 30 x 24 x 6m, DIN 5480



Shaft mounted
Mounted via shrink disc



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>

Motor mounting according to operating manual

SPK+ 100 MF 3-stage

					3-stage												
Ratio ^{a)}	<i>i</i>		64	84	100	125	140	175	200	250	280	350	400	500	700	1000	
Max. acceleration torque (max. 1000 cycles per hour)	<i>T</i> _{2B}	Nm	280	280	300	300	300	300	300	300	300	300	200	250	300	225	
		in.lb	2478	2478	2655	2655	2655	2655	2655	2655	2655	2655	1770	2213	2655	1991	
Nominal output torque (with <i>n</i> _{1N})	<i>T</i> _{2N}	Nm	180	180	175	175	175	175	175	175	170	175	160	175	170	120	
		in.lb	1593	1593	1549	1549	1549	1549	1549	1549	1505	1549	1416	1549	1505	1062	
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	<i>T</i> _{2Not}	Nm	400	400	500	500	500	500	500	500	625	500	400	500	625	500	
		in.lb	3540	3540	4425	4425	4425	4425	4425	4425	5531	4425	3540	4425	5531	4425	
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}	<i>n</i> _{1N}	rpm	3500	3500	3500	3500	3500	3500	3500	3800	3500	3800	4500	4500	4500	4500	
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)	<i>n</i> _{1Ncym}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Max. input speed	<i>n</i> _{1Max}	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}	<i>T</i> ₀₁₂	Nm	0.4	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
		in.lb	3.5	2.7	2.7	2.7	2.7	2.7	2.7	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
Max. torsional backlash	<i>j</i> _t	arcmin	Standard ≤ 4 / Reduced ≤ 2														
Torsional rigidity	<i>C</i> _{t21}	Nm/ arcmin	31														
		in.lb/ arcmin	274														
Max. axial force ^{e)}	<i>F</i> _{2AMax}	N	5650														
		lb _f	1271														
Max. radial force ^{e)}	<i>F</i> _{2RMax}	N	6300														
		lb _f	1418														
Max. tilting moment	<i>M</i> _{2KMax}	Nm	487														
		in.lb	4310														
Efficiency at full load	η	%	92														
Service life (For calculation, see the Chapter "Information")	<i>L</i> _h	h	> 20000														
Weight incl. standard adapter plate	<i>m</i>	kg	10.3														
		lb _m	22.8														
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)	<i>L</i> _{PA}	dB(A)	≤ 68														
Max. permitted housing temperature		°C	+90														
		F	194														
Ambient temperature		°C	0 to +40														
		F	32 to 104														
Lubrication			Lubricated for life														
Paint			Blue RAL 5002														
Direction of rotation			Motor and gearhead opposite directions														
Protection class			IP 65														
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	<i>J</i> _i	kgcm ²	0.28	0.23	0.24	0.23	0.21	0.20	0.19	0.18	0.19	0.18	0.18	0.18	0.18
				10 ⁻³ in.lb.s ²	0.25	0.20	0.21	0.20	0.19	0.18	0.17	0.16	0.17	0.16	0.16	0.16	0.16
	E	19	<i>J</i> _i	kgcm ²	0.72	0.63	0.68	0.68	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63	0.63
				10 ⁻³ in.lb.s ²	0.64	0.56	0.60	0.60	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56

^{a)} Other ratios up to i=1000 available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

3-stage:

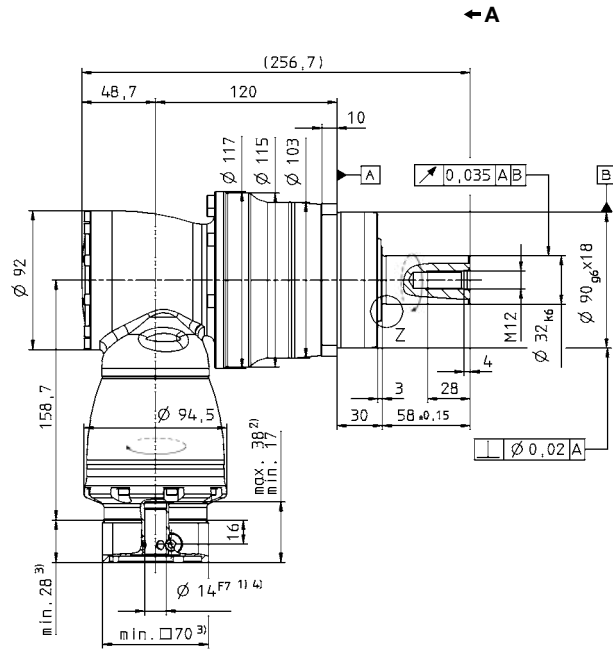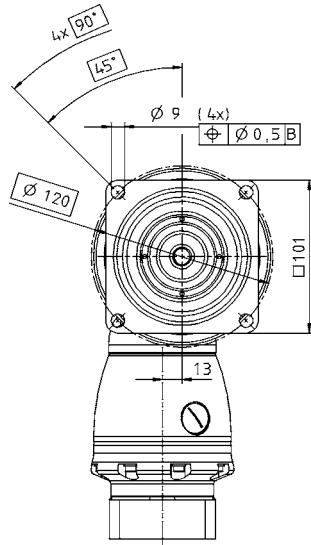


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants


Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 32 x 1.25 x 30 x 24 x 6m, DIN 5480



Shaft mounted
Mounted via shrink disc



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ±1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>

Motor mounting according to operating manual

SPK+ 140 MF 2-stage

					2-stage											
Ratio ^{a)}			<i>i</i>		12	16	20	25	28	35	40	50	70	100		
Max. acceleration torque (max. 1000 cycles per hour)			<i>T</i> _{2B}	Nm	600	600	600	600	600	600	500	600	600	480		
				in.lb	5310	5310	5310	5310	5310	5310	5310	4425	5310	5310	4248	
Nominal output torque (with <i>n</i> _{1N})			<i>T</i> _{2N}	Nm	360	360	360	360	360	360	320	360	360	220		
				in.lb	3186	3186	3186	3186	3186	3186	3186	2832	3186	3186	1947	
Emergency stop torque (permitted 1000 times during the service life of the gearhead)			<i>T</i> _{2Not}	Nm	1000	1000	1250	1250	1250	1250	1000	1250	1250	1000		
				in.lb	8850	8850	11063	11063	11063	11063	11063	8850	11063	11063	8850	
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}			<i>n</i> _{1N}	rpm	1900	2300	2300	2600	2300	2300	2300	2300	2300	2300		
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)			<i>n</i> _{1Ncym}	rpm	2700	3100	3100	3500	3100	3000	3000	3000	3000	3000		
Max. input speed			<i>n</i> _{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500		
Mean no load running torque (with <i>n</i> ₁ =3000 rpm and 20°C gearhead temperature) ^{d)}			<i>T</i> ₀₁₂	Nm	4.0	3.7	3.6	2.8	3.5	3.9	3.1	3.1	3.1	3.1		
				in.lb	35.4	32.7	31.9	24.8	31	34.5	27.4	27.4	27.4	27.4		
Max. torsional backlash			<i>j</i> _t	arcmin	Standard ≤ 4 / Reduced ≤ 2											
Torsional rigidity			<i>C</i> _{t21}	Nm/ arcmin	53											
				in.lb/ arcmin	469											
Max. axial force ^{e)}			<i>F</i> _{2AMax}	N	9870											
				lb _f	2221											
Max. radial force ^{e)}			<i>F</i> _{2RMMax}	N	9450											
				lb _f	2126											
Max. tilting moment			<i>M</i> _{2KMax}	Nm	952											
				in.lb	8425											
Efficiency at full load			η	%	94											
Service life (For calculation, see the Chapter "Information")			<i>L</i> _h	h	> 20000											
Weight incl. standard adapter plate			<i>m</i>	kg	20											
				lb _m	44											
Operating noise (with <i>n</i> ₁ =3000 rpm no load)			<i>L</i> _{PA}	dB(A)	≤ 68											
Max. permitted housing temperature				°C	+90											
				F	194											
Ambient temperature				°C	0 to +40											
				F	32 to 104											
Lubrication			Lubricated for life													
Paint			Blue RAL 5002													
Direction of rotation			Motor and gearhead opposite directions													
Protection class			IP 65													
Moment of inertia (relates to the drive) Clamping hub diameter [mm]			H	28	<i>J</i> ₁	kgcm ²	4.68	3.82	3.75	3.31	3.68	2.97	2.80	2.79	2.78	2.77
						10 ⁻³ in.lb.s ²	4.14	3.38	3.32	2.93	3.26	2.63	2.48	2.47	2.46	2.45
			K	38	<i>J</i> ₁	kgcm ²	11.8	11.0	10.9	10.5	10.9	10.1	9.96	9.95	9.94	9.94
						10 ⁻³ in.lb.s ²	10.5	9.73	9.66	9.27	9.60	8.97	8.82	8.81	8.80	8.79

^{a)} Other ratios up to i=1000 available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

2-stage:

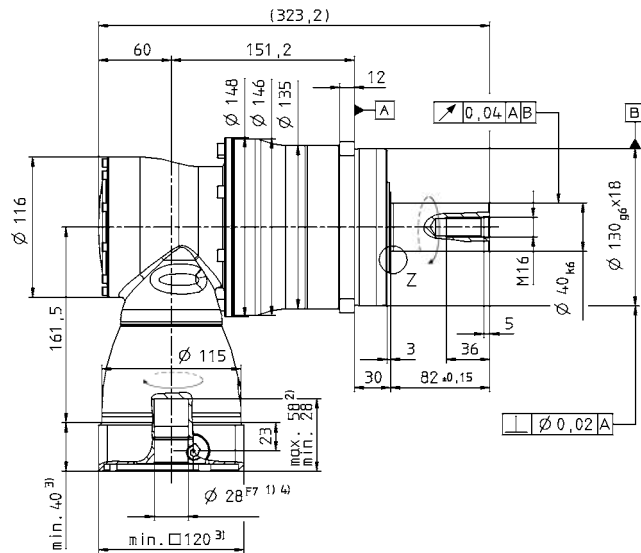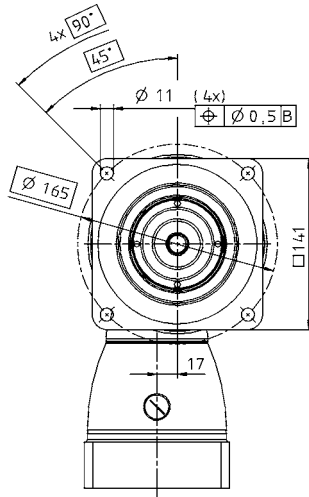


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants


Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 40 x 2 x 30 x 18 x 6m, DIN 5480



Shaft mounted
Mounted via shrink disc



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>

Motor mounting according to operating manual

SPK+ 140 MF 3-stage

					3-stage												
Ratio ^{a)}	<i>i</i>		64	84	100	125	140	175	200	250	280	350	400	500	700	1000	
Max. acceleration torque (max. 1000 cycles per hour)	<i>T</i> _{2B}	Nm	600	600	600	600	600	600	600	600	600	600	500	600	600	480	
		in.lb	5310	5310	5310	5310	5310	5310	5310	5310	5310	5310	5310	4425	5310	5310	4248
Nominal output torque (with <i>n</i> _{1N})	<i>T</i> _{2N}	Nm	360	360	360	360	360	360	360	360	360	360	320	360	360	220	
		in.lb	3186	3186	3186	3186	3186	3186	3186	3186	3186	3186	3186	2832	3186	3186	1947
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	<i>T</i> _{2Not}	Nm	1000	1000	1250	1250	1250	1250	1250	1250	1250	1250	1000	1250	1250	1000	
		in.lb	8850	8850	11063	11063	11063	11063	11063	11063	11063	11063	11063	8850	11063	11063	8850
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}	<i>n</i> _{1N}	rpm	3100	3100	3100	3100	3100	3100	3100	3500	3100	3500	4200	4200	4200	4200	
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)	<i>n</i> _{1Ncym}	rpm	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4200	4200	4200	4200	
Max. input speed	<i>n</i> _{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}	<i>T</i> ₀₁₂	Nm	0.7	0.4	0.6	0.5	0.5	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	
		in.lb	6.2	3.5	5.3	4.4	4.4	3.5	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	
Max. torsional backlash	<i>j</i> _t	arcmin	Standard ≤ 4 / Reduced ≤ 2														
Torsional rigidity	<i>C</i> _{t21}	Nm/ arcmin	53														
		in.lb/ arcmin	469														
Max. axial force ^{e)}	<i>F</i> _{2AMax}	N	9870														
		lb _f	2221														
Max. radial force ^{e)}	<i>F</i> _{2RMax}	N	9450														
		lb _f	2126														
Max. tilting moment	<i>M</i> _{2KMax}	Nm	952														
		in.lb	8425														
Efficiency at full load	η	%	92														
Service life (For calculation, see the Chapter "Information")	<i>L</i> _h	h	> 20000														
Weight incl. standard adapter plate	<i>m</i>	kg	20.7														
		lb _m	45.7														
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)	<i>L</i> _{PA}	dB(A)	< 68														
Max. permitted housing temperature		°C	+90														
		F	194														
Ambient temperature		°C	0 to +40														
		F	32 to 104														
Lubrication			Lubricated for life														
Paint			Blue RAL 5002														
Direction of rotation			Motor and gearhead opposite directions														
Protection class			IP 65														
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	<i>J</i> _i	kgcm ²	1.01	0.76	0.88	0.85	0.76	0.75	0.70	0.69	0.70	0.69	0.69	0.69	0.69
				10 ⁻³ in.lb.s ²	0.89	0.67	0.78	0.75	0.67	0.66	0.62	0.61	0.62	0.61	0.61	0.61	0.61
	G	24	<i>J</i> _i	kgcm ²	2.57	2.32	2.44	2.42	2.32	2.31	2.26	2.25	2.26	2.25	2.25	2.25	2.25
				10 ⁻³ in.lb.s ²	2.27	2.05	2.16	2.14	2.05	2.04	2.00	1.99	2.00	1.99	1.99	1.99	1.99

^{a)} Other ratios up to i=1000 available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

3-stage:

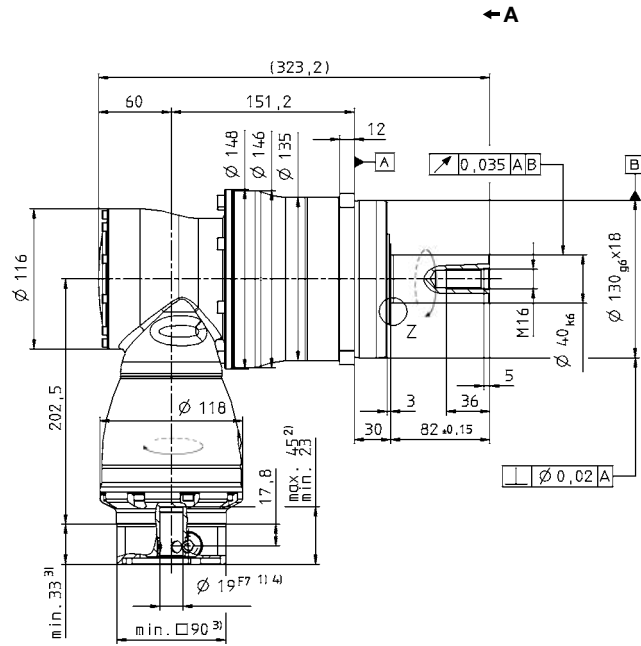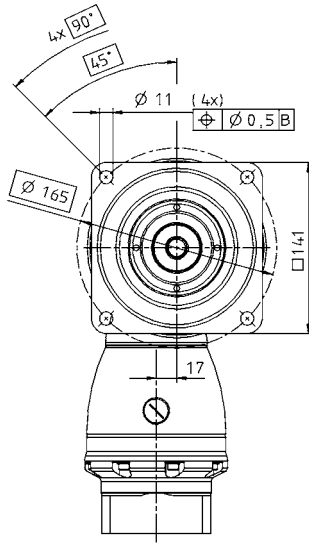


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants


Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 40 x 2 x 30 x 18 x 6m, DIN 5480



Shaft mounted
Mounted via shrink disc



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>

Motor mounting according to operating manual

SPK+ 180 MF 2-stage

				2-stage													
Ratio ^{a)}				<i>i</i>		12	16	20	25	28	35	40	50	70	100		
Max. acceleration torque (max. 1000 cycles per hour)				<i>T</i> _{2B}	Nm	1100	1100	1100	1100	1100	1100	840	1050	1100	880		
					in.lb	9735	9735	9735	9735	9735	9735	7434	9293	9735	7788		
Nominal output torque (with <i>n</i> _{2N})				<i>T</i> _{2N}	Nm	750	750	750	750	750	750	640	750	750	750		
					in.lb	6638	6638	6638	6638	6638	6638	6638	5664	6638	6638	6638	
Emergency stop torque (permitted 1000 times during the service life of the gearhead)				<i>T</i> _{2Not}	Nm	1600	1600	2000	2000	2750	2000	1600	2000	2750	2200		
					in.lb	14160	14160	17700	17700	24338	17700	14160	17700	24338	19470		
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}				<i>n</i> _{1N}	rpm	1600	1900	1900	2100	1900	2100	2100	2100	2100	2100		
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)				<i>n</i> _{1Ncym}	rpm	2300	2600	2600	2800	2600	3000	3000	3000	3000	3000		
Max. input speed				<i>n</i> _{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500		
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}				<i>T</i> ₀₁₂	Nm	9.0	6.5	6.5	5.5	6.0	8.0	6.0	6.0	6.0	6.0		
					in.lb	79.7	57.5	57.5	48.7	53.1	70.8	53.1	53.1	53.1	53.1	53.1	
Max. torsional backlash				<i>j</i> _t	arcmin	Standard ≤ 4 / Reduced ≤ 2											
Torsional rigidity				<i>C</i> _{t21}	Nm/ arcmin	175											
					in.lb/ arcmin	1549											
Max. axial force ^{e)}				<i>F</i> _{2AMax}	N	14150											
					lb _f	3184											
Max. radial force ^{e)}				<i>F</i> _{2RMax}	N	14700											
					lb _f	3308											
Max. tilting moment				<i>M</i> _{2KMax}	Nm	1600											
					in.lb	14160											
Efficiency at full load				η	%	94											
Service life (For calculation, see the Chapter "Information")				<i>L</i> _h	h	> 20000											
Weight incl. standardadapter plate				<i>m</i>	kg	45											
					lb _m	99											
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)				<i>L</i> _{PA}	dB(A)	≤ 70											
Max. permitted housing temperature					°C	+90											
					F	194											
Ambient temperature					°C	0 to +40											
					F	32 to 104											
Lubrication					Lubricated for life												
Paint					Blue RAL 5002												
Direction of rotation					Motor and gearhead opposite directions												
Protection class					IP 65												
Moment of inertia (relates to the drive) Clamping hub diameter [mm]				K	38	<i>J</i> _f	kgcm ²	24.7	19.5	19.0	16.3	18.6	14.0	12.9	12.8	12.7	12.7
							10 ⁻¹ in.lb.s ²	21.9	17.2	16.8	14.4	16.5	12.4	11.4	11.3	11.3	11.2

^{a)} Other ratios up to $i=1000$ available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

2-stage:

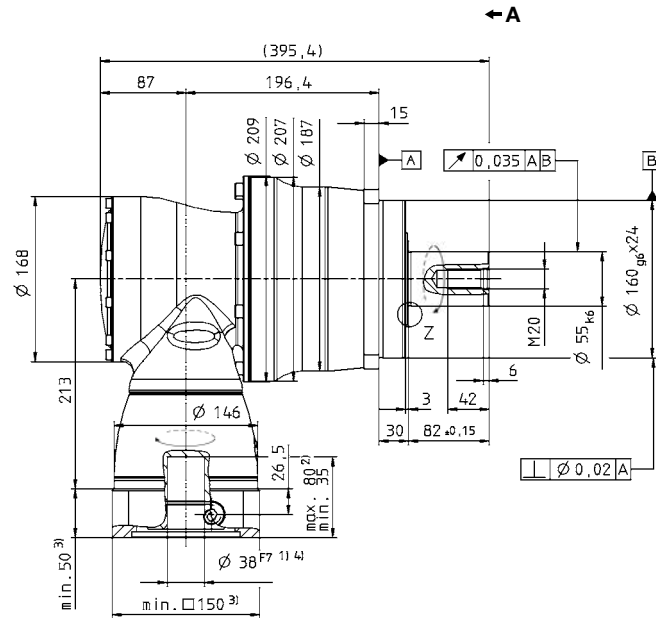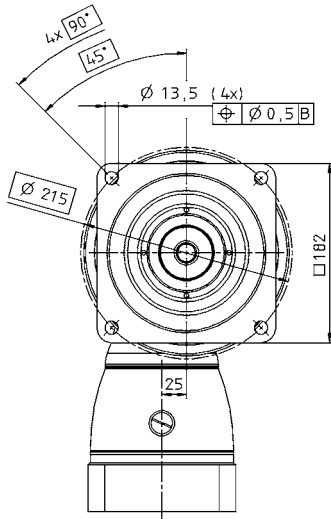


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants


Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 55 x 2 x 30 x 26 x 6m, DIN 5480



Shaft mounted
Mounted via shrink disc



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>

Motor mounting according to operating manual

SPK+ 180 MF 3-stage

				3-stage															
Ratio ^{a)}				<i>i</i>		64	84	100	125	140	175	200	250	280	350	400	500	700	1000
Max. acceleration torque (max. 1000 cycles per hour)				<i>T</i> _{2B}	Nm	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	840	1050	1100	880
					in.lb	9735	9735	9735	9735	9735	9735	9735	9735	9735	9735	9735	7434	9293	9735
Nominal output torque (with <i>n</i> _{2N})				<i>T</i> _{2N}	Nm	750	750	750	750	750	750	750	750	750	750	640	750	750	750
					in.lb	6638	6638	6638	6638	6638	6638	6638	6638	6638	6638	6638	5664	6638	6638
Emergency stop torque (permitted 1000 times during the service life of the gearhead)				<i>T</i> _{2Not}	Nm	1600	1600	2000	2000	2000	2000	2000	2000	2750	2000	1600	2000	2750	2200
					in.lb	14160	14160	17700	17700	17700	17700	17700	17700	17700	24338	17700	14160	17700	24338
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}				<i>n</i> _{1N}	rpm	2900	2900	2900	2900	2900	2900	2900	3200	2900	3200	3900	3900	3900	3900
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)				<i>n</i> _{1Ncym}	rpm	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4200	4200	4200	4200
Max. input speed				<i>n</i> _{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}				<i>T</i> ₀₁₂	Nm	1	0.5	0.8	0.6	0.6	0.5	0.5	0.4	0.5	0.4	0.4	0.4	0.4	0.4
					in.lb	8.9	4.4	7.1	5.3	5.3	4.4	4.4	3.5	4.4	3.5	3.5	3.5	3.5	3.5
Max. torsional backlash				<i>j</i> _t	arcmin	Standard ≤ 4 / Reduced ≤ 2													
Torsional rigidity				<i>C</i> _{t21}	Nm/ arcmin	175													
					in.lb/ arcmin	1549													
Max. axial force ^{e)}				<i>F</i> _{2AMax}	N	14150													
					lb _f	3184													
Max. radial force ^{e)}				<i>F</i> _{2RMax}	N	14700													
					lb _f	3308													
Max. tilting moment				<i>M</i> _{2KMax}	Nm	1600													
					in.lb	14160													
Efficiency at full load				η	%	92													
Service life (For calculation, see the Chapter "Information")				<i>L</i> _h	h	> 20000													
Weight incl. standardadapter plate				<i>m</i>	kg	47.4													
					lb _m	104.8													
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)				<i>L</i> _{PA}	dB(A)	< 70													
Max. permitted housing temperature					°C	+90													
					F	194													
Ambient temperature					°C	0 to +40													
					F	32 to 104													
Lubrication						Lubricated for life													
Paint						Blue RAL 5002													
Direction of rotation						Motor and gearhead opposite directions													
Protection class						IP 65													
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	G	24	<i>J</i> _i	kgcm ²	3.97	2.82	3.36	3.22	2.82	2.75	2.50	2.47	2.50	2.44	2.42	2.42	2.42	2.42	
				10 ⁻³ in.lb.in ²	3.51	2.50	2.97	2.85	2.50	2.43	2.21	2.19	2.21	2.16	2.14	2.14	2.14	2.14	
	K	38	<i>J</i> _i	kgcm ²	10.90	9.74	10.30	10.10	9.74	9.66	9.41	9.38	9.41	9.38	9.33	9.33	9.33	9.33	
				10 ⁻³ in.lb.in ²	9.65	8.62	9.12	8.94	8.62	8.55	8.33	8.30	8.33	8.30	8.26	8.26	8.26	8.26	

^{a)} Other ratios up to i=1000 available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).




View A

3-stage:

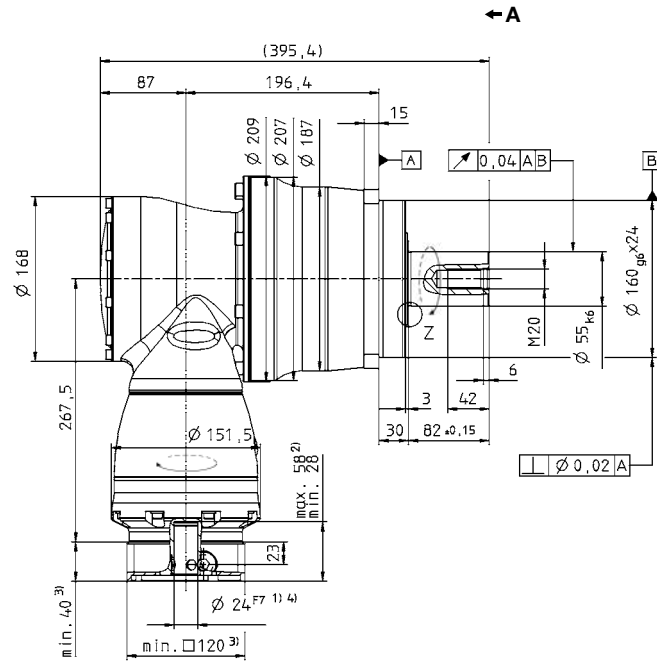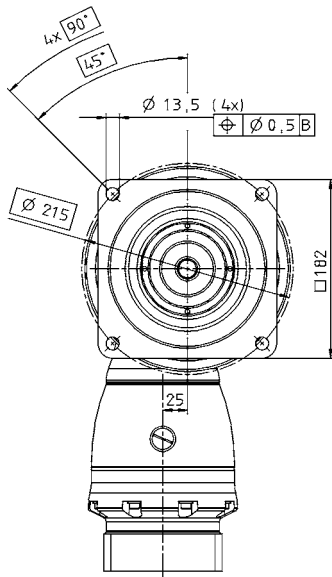
Right-angle gearheads
High End

SPK+

Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A

Involute gearing DIN 5480 in mm
X = W 55 x 2 x 30 x 26 x 6m, DIN 5480

Shaft mounted
Mounted via shrink disc


See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.


CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>

Motor mounting according to operating manual

SPK+ 210 MF 2-stage

				2-stage											
Ratio ^{a)}				<i>i</i>		12	16	20	25	28	35	40	50	70	100
Max. acceleration torque (max. 1000 cycles per hour)				<i>T</i> _{2B}	Nm	2500	2500	2500	2500	2400	2400	1850	2300	2400	1900
					in.lb	22125	22125	22125	22125	21240	21240	16373	20355	21240	16815
Nominal output torque (with <i>n</i> _{IN})				<i>T</i> _{2N}	Nm	1500	1500	1500	1500	1400	1500	1400	1500	1400	1000
					in.lb	13.275	13275	13275	13275	12390	13275	12390	13275	12390	8850
Emergency stop torque (permitted 1000 times during the service life of the gearhead)				<i>T</i> _{2Not}	Nm	3600	4200	5200	5200	5200	5200	3600	4500	5200	5000
					in.lb	31860	37170	46020	46020	46020	46020	31860	39825	46020	44250
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}				<i>n</i> _{1N}	rpm	1500	1700	1700	1900	1700	1900	1700	1700	1700	1700
Max. continuous speed (with 20 % <i>T</i> _{2N} and 20°C ambient temperature)				<i>n</i> _{1Ncym}	rpm	1900	2300	2300	2700	2300	2700	2400	2400	2400	2400
Max. input speed				<i>n</i> _{1Max}	rpm	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}				<i>T</i> ₀₁₂	Nm	18.5	17.0	15.0	13.0	14.0	12.0	15.0	15.0	14.0	13.0
					in.lb	163.7	150.5	132.8	115.1	123.9	106.2	132.8	132.8	123.9	115.1
Max. torsional backlash				<i>j</i> _t	arcmin	Standard ≤4 / Reduced ≤2									
Torsional rigidity				<i>C</i> _{t21}	Nm/ arcmin	300	300	300	300	300	300	300	300	300	300
					in.lb/ arcmin	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655
Max. axial force ^{e)}				<i>F</i> _{2AMax}	N	30000									
					lb _f	6750									
Max. radial force ^{e)}				<i>F</i> _{2RMax}	N	21000									
					lb _f	4725									
Max. tilting moment				<i>M</i> _{2KIMax}	Nm	3100									
					in.lb	27435									
Efficiency at full load				η	%	94									
Service life (For calculation, see the Chapter "Information")				<i>L</i> _h	h	> 20000									
Weight incl. standard adapter plate				<i>m</i>	kg	82									
					lb _m	181									
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)				<i>L</i> _{PA}	dB(A)	≤ 71									
Max. permitted housing temperature					°C	+90									
					F	194									
Ambient temperature					°C	0 to +40									
					F	32 to 104									
Lubrication					Lubricated for life										
Paint					Blue RAL 5002										
Direction of rotation					Motor and gearhead opposite directions										
Protection class					IP 65										
Moment of inertia (relates to the drive) Clamping hub diameter [mm]		M	48	<i>J</i> ₁	kgcm²	78.80	54.60	53.00	43.40	51.50	42.20	30.20	30.00	29.80	29.80
					10 ⁻³ in.lb.s²	69.74	48.32	46.91	38.41	45.58	37.35	26.73	26.55	26.37	26.37

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

2-stage:

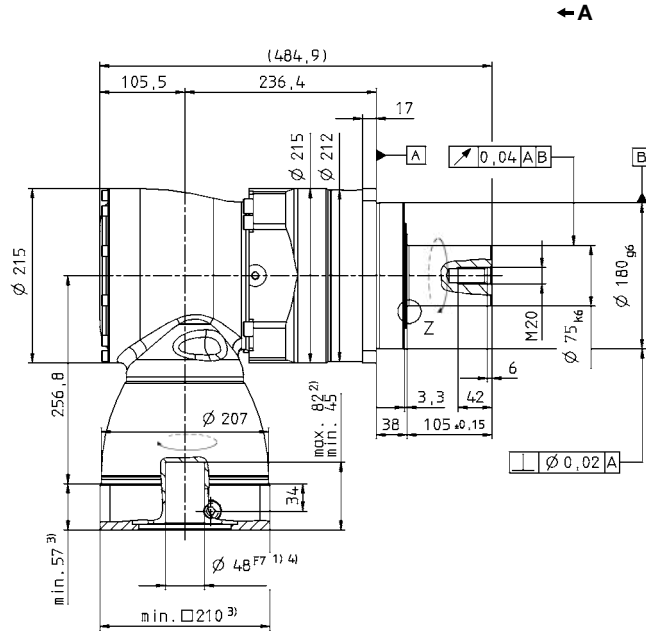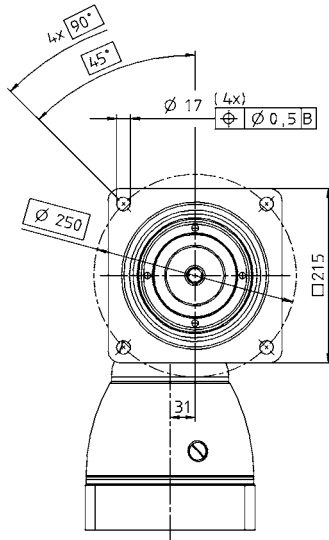


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 70 x 2 x 30 x 34 x 6m, DIN 5480



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ±1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>



Motor mounting according to operating manual

SPK+ 210 MF 3-stage

					3-stage												
Ratio ^{a)}	<i>i</i>		64	84	100	125	140	175	200	250	280	350	400	500	700	1000	
Max. acceleration torque (max. 1000 cycles per hour)	<i>T</i> _{2B}	Nm	2400	2400	2500	2500	2500	2500	2500	2500	2400	2400	1900	2350	2400	1900	
		in.lb	21240	21240	22125	22125	22125	22125	22125	22125	21240	21240	16815	20798	21240	16815	
Nominal output torque (with <i>n</i> _{in})	<i>T</i> _{2N}	Nm	1500	1500	1500	1500	1500	1500	1500	1500	1400	1400	1500	1500	1400	1000	
		in.lb	13275	13275	13275	13275	13275	13275	13275	13275	12390	12390	13275	13275	12390	8850	
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	<i>T</i> _{2Not}	Nm	4200	3600	5200	5200	5200	5200	5200	5200	5200	5200	3600	4500	5200	5000	
		in.lb	37170	31860	46020	46020	46020	46020	46020	46020	46020	46020	31860	39825	46020	44250	
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}	<i>n</i> _{1N}	rpm	2700	2700	2700	2700	2700	2700	2700	2900	2700	2900	3400	3400	3400	3400	
Max. continuous speed (with 20 % <i>T</i> _{2N} and 20°C ambient temperature)	<i>n</i> _{1Ncym}	rpm	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3800	3800	
Max. input speed	<i>n</i> _{1Max}	rpm	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}	<i>T</i> ₀₁₂	Nm	2.4	1.2	1.9	1.7	1.3	1.3	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
		in.lb	21.2	10.6	16.8	15.0	11.5	11.5	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	
Max. torsional backlash	<i>j</i> _t	arcmin	Standard ≤4 / Reduced ≤2														
Torsional rigidity	<i>C</i> _{t21}	Nm/ arcmin	300	300	300	300	300	300	300	300	300	300	300	300	300	300	
		in.lb/ arcmin	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655	2.655	
Max. axial force ^{e)}	<i>F</i> _{2AMax}	N	30000														
		lb _f	6750														
Max. radial force ^{e)}	<i>F</i> _{2RMax}	N	21000														
		lb _f	4725														
Max. tilting moment	<i>M</i> _{2KMax}	Nm	3100														
		in.lb	27435														
Efficiency at full load	η	%	92														
Service life (For calculation, see the Chapter "Information")	<i>L</i> _h	h	> 20000														
Weight incl. standard adapter plate	<i>m</i>	kg	86														
		lb _m	190														
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)	<i>L</i> _{PA}	dB(A)	≤ 71														
Max. permitted housing temperature		°C	+90														
		F	194														
Ambient temperature		°C	0 to +40														
		F	32 to 104														
Lubrication			Lubricated for life														
Paint			Blue RAL 5002														
Direction of rotation			Motor and gearhead opposite directions														
Protection class			IP 65														
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	K	38	<i>J</i> ₁	kgcm ²	14.00	10.90	12.30	12.00	10.90	10.70	10.10	10.00	10.10	10.00	9.90	9.90	9.90
				10 ⁻³ in.lb.in ²	12.39	9.65	10.89	10.62	9.65	9.47	8.94	8.85	8.94	8.85	8.76	8.76	8.76
	M	48	<i>J</i> ₁	kgcm ²	28.70	25.60	27.10	26.70	26.70	25.60	24.80	24.70	24.80	24.70	24.60	24.60	24.60
				10 ⁻³ in.lb.in ²	25.40	22.66	23.98	23.63	23.63	22.66	21.95	21.86	21.95	21.86	21.77	21.77	21.77

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange


All technical data for front output side applies.

Technical data for rearward output versions, see page 422.



Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

3-stage:

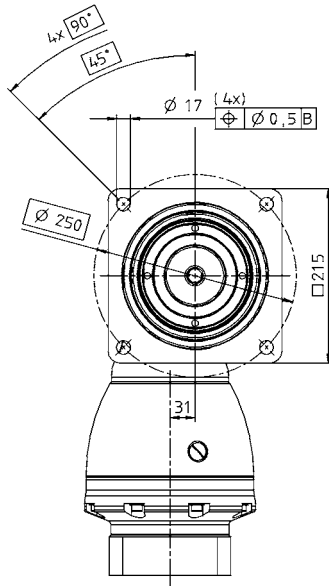

← A

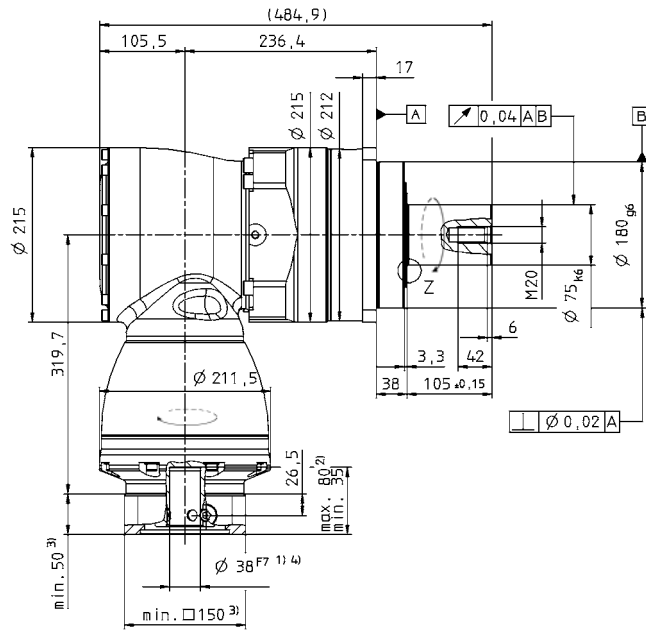


Right-angle gearheads
High End

SPK+

Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A

Involute gearing DIN 5480 in mm
X = W 70 x 2 x 30 x 34 x 6m, DIN 5480

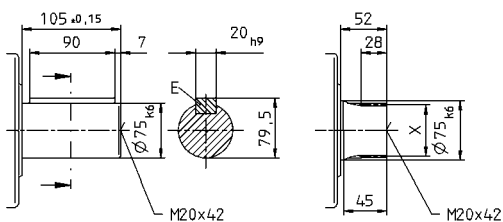

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>



Motor mounting according to operating manual

SPK+ 240 MF 3-stage

			3-stage													
Ratio ^{a)}	<i>i</i>		48	64	100	125	140	175	200	250	280	350	400	500	700	1000
Max. acceleration torque (max. 1000 cycles per hour)	<i>T</i> _{2B}	Nm	4500	4500	4500	4500	4500	4500	4500	4500	4300	4500	4000	4300	4300	3400
		in.lb	39825	39825	39825	39825	39825	39825	39825	39825	38055	39825	35400	38055	38055	30090
Nominal output torque (with <i>n</i> _{in})	<i>T</i> _{2N}	Nm	2500	2500	2500	2500	2500	2500	2500	2500	2300	2500	2500	2500	2300	1700
		in.lb	22125	22125	22125	22125	22125	22125	22125	22125	20355	22125	22125	22125	20355	15045
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	<i>T</i> _{2Not}	Nm	6400	8000	8500	8500	8500	8500	8500	8500	8500	8500	8500	8500	8500	6800
		in.lb	56640	70800	75225	75225	75225	75225	75225	75225	75225	75225	75225	75225	75225	60180
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}	<i>n</i> _{1N}	rpm	1800	1900	1900	2100	1900	2100	2100	2100	2100	2100	2100	2100	2100	2100
Max. continuous speed (with 20 % <i>T</i> _{2N} and 20°C ambient temperature)	<i>n</i> _{1Ncym}	rpm	2000	2200	2600	2600	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300
Max. input speed	<i>n</i> _{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}	<i>T</i> ₀₁₂	Nm	11.0	8.0	7.0	7.0	8.0	8.0	7.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
		in.lb	94.3	70.8	62.0	62.0	70.8	70.8	62.0	53.1	53.1	53.1	53.1	53.1	53.1	53.1
Max. torsional backlash	<i>j</i> _t	arcmin	Standard ≤ 5,5 / Reduced ≤ 3,5													
Torsional rigidity	<i>C</i> _{t21}	Nm/ arcmin	510	510	510	510	510	510	510	510	510	510	510	510	510	510
		in.lb/ arcmin	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514
Max. axial force ^{e)}	<i>F</i> _{2AMax}	N	33000													
		lb _f	7425													
Max. radial force ^{e)}	<i>F</i> _{2RMax}	N	30000													
		lb _f	6750													
Max. tilting moment	<i>M</i> _{2KMax}	Nm	5000													
		in.lb	44250													
Efficiency at full load	<i>η</i>	%	92													
Service life (For calculation, see the Chapter "Information")	<i>L</i> _h	h	> 20000													
Weight incl. standard adapter plate	<i>m</i>	kg	93													
		lb _m	206													
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)	<i>L</i> _{PA}	dB(A)	≤ 71													
Max. permitted housing temperature		°C	+90													
		F	194													
Ambient temperature		°C	0 to +40													
		F	32 to 104													
Lubrication			Lubricated for life													
Paint			Blue RAL 5002													
Direction of rotation			Motor and gearhead opposite directions													
Protection class			IP 65													
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	<i>K</i>	38	<i>J</i> _i	kgcm ²	26.5	20.00	17.00	17.00	15.00	15.00	13.00	13.00	13.00	13.00	13.00	13.00
				10 ⁻³ in.lb.s ²	23.40	17.70	15.05	15.05	13.28	13.28	11.51	11.51	11.51	11.51	11.51	11.51

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

3-stage:

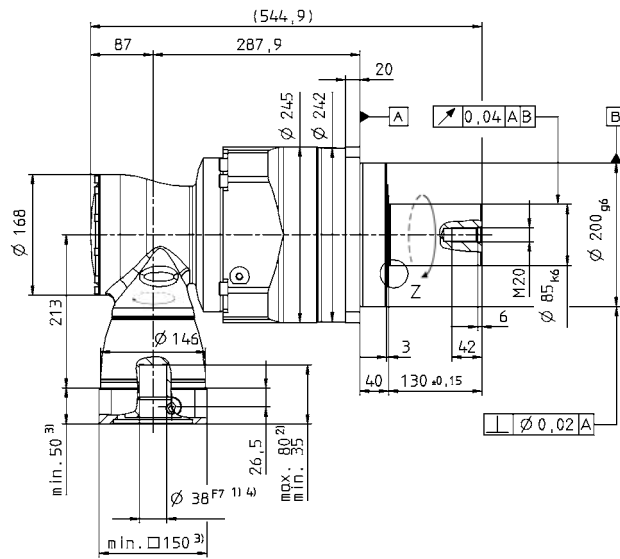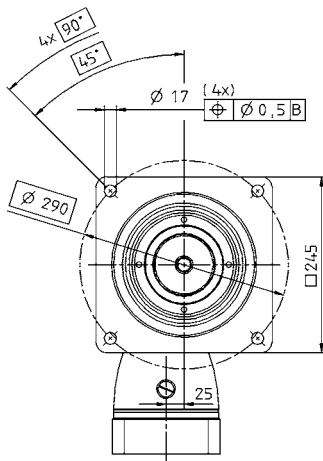


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 80 x 2 x 30 x 38 x 6m, DIN 5480



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ±1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>



Motor mounting according to operating manual

SPK+ 240 MF 4-stage i=144-1000

					4-stage												
Ratio ^{a)}	<i>i</i>		144	192	256	300	375	420	500	560	600	700	800	875	1000		
Max. acceleration torque (max. 1000 cycles per hour)	<i>T</i> _{2B}	Nm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500		
		in.lb	39825	39825	39825	39825	39825	39825	39825	39825	39825	39825	39825	39825	39825	39825	
Nominal output torque (with <i>n</i> _{in})	<i>T</i> _{2N}	Nm	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500	2500		
		in.lb	22125	22125	22125	22125	22125	22125	22125	22125	22125	22125	22125	22125	22125	22125	
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	<i>T</i> _{2Not}	Nm	8000	8000	8000	8500	8500	8500	8500	8500	8500	8500	8500	8500	8500		
		in.lb	70800	70800	70800	75225	75225	75225	75225	75225	75225	75225	75225	75225	75225	75225	
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}	<i>n</i> _{1N}	rpm	2700	2900	2900	2900	2900	2900	2900	2900	2900	2900	2900	2900	3200		
Max. continuous speed (with 20% <i>T</i> _{2N} and 20°C ambient temperature)	<i>n</i> _{1Ncym}	rpm	3800	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	4200		
Max. input speed	<i>n</i> _{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500		
Mean no load running torque (with <i>n</i> ₁ = 3000 rpm and 20°C gearhead temperature) ^{d)}	<i>T</i> ₀₁₂	Nm	3.2	2.3	1.6	1.3	0.7	0.9	0.9	0.8	0.7	0.7	0.6	0.6	0.5		
		in.lb	28.3	20.4	14.2	11.5	6.2	8.0	8.0	7.1	6.2	6.2	5.3	5.3	4.4		
Max. torsional backlash	<i>j</i> _t	arcmin	Standard ≤5,5 / Reduced ≤3,5														
Torsional rigidity	<i>C</i> _{t21}	Nm/ arcmin	510	510	510	510	510	510	510	510	510	510	510	510	510		
		in.lb/ arcmin	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514		
Max. axial force ^{e)}	<i>F</i> _{2AMax}	N	33000														
		lb _f	7425														
Max. radial force ^{e)}	<i>F</i> _{2RMax}	N	30000														
		lb _f	6750														
Max. tilting moment	<i>M</i> _{2KMax}	Nm	5000														
		in.lb	44250														
Efficiency at full load	η	%	90														
Service life (For calculation, see the Chapter "Information")	<i>L</i> _h	h	> 20000														
Weight incl. standard adapter plate	<i>m</i>	kg	96														
		lb _m	212														
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)	<i>L</i> _{PA}	dB(A)	≤ 71														
Max. permitted housing temperature		°C	+90														
		F	194														
Ambient temperature		°C	0 to +40														
		F	32 to 104														
Lubrication			Lubricated for life														
Paint			Blue RAL 5002														
Direction of rotation			Motor and gearhead opposite directions														
Protection class			IP 65														
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	G	24	<i>J</i> _I	kgcm ²	5.96	4.30	3.90	3.32	3.31	2.80	3.18	2.80	2.49	2.73	2.49	2.73	2.46
				10 ⁻³ in.lb.s ²	5.28	3.81	3.45	2.94	2.93	2.48	2.82	2.47	2.21	2.42	2.20	2.42	2.18
	K	38	<i>J</i> _I	kgcm ²	12.87	11.19	10.81	10.23	10.22	9.72	10.09	9.71	9.40	9.65	9.40	9.65	9.37
				10 ⁻³ in.lb.s ²	11.39	9.91	9.57	9.05	9.05	8.60	8.93	8.59	8.32	8.54	8.32	8.54	8.29

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange




All technical data for front output side applies.

Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

4-stage:

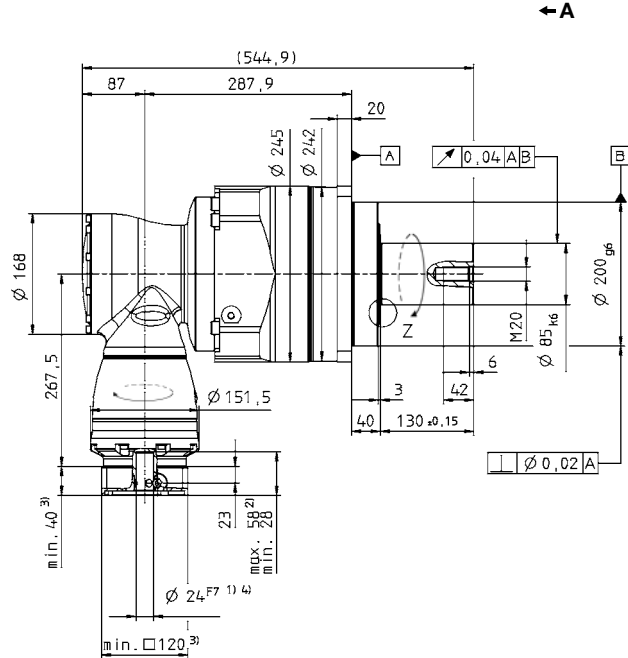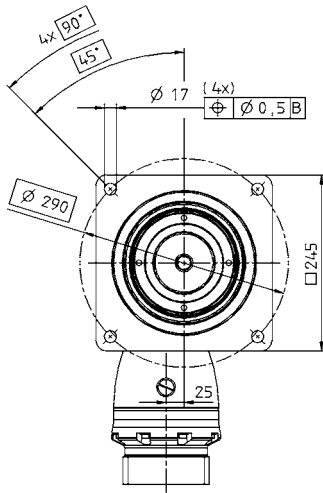


Right-angle gearheads
High End


SPK+

Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A



Involute gearing DIN 5480 in mm
X = W 80 x 2 x 30 x 38 x 6m, DIN 5480



See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>



Motor mounting according to operating manual

SPK+ 240 MF 4-stage i=1225-10000

			4-stage								
Ratio ^{a)}	<i>i</i>		1225	1400	1750	2000	2800	3500	5000	7000	10000
Max. acceleration torque (max. 1000 cycles per hour)	<i>T</i> _{2B}	Nm	4500	4500	4500	4200	4300	4500	4300	4300	3400
		in.lb	39825	39825	39825	37170	38055	39825	38055	38055	30090
Nominal output torque (with <i>n</i> _{in})	<i>T</i> _{2N}	Nm	2500	2500	2500	2500	2300	2500	2500	2300	1700
		in.lb	22125	22125	22125	22125	20355	22125	22125	20355	15045
Emergency stop torque (permitted 1000 times during the service life of the gearhead)	<i>T</i> _{2Not}	Nm	8500	8500	8500	8000	8500	8500	8500	8500	6800
		in.lb	75225	75225	75225	70800	75225	75225	75225	75225	60180
Nominal input speed (with <i>T</i> _{2N} and 20°C ambient temperature) ^{b), c)}	<i>n</i> _{1N}	rpm	2900	2900	3200	3900	3900	3900	3900	3900	3900
Max. continuous speed (with 20 % <i>T</i> _{2N} and 20°C ambient temperature)	<i>n</i> _{1Ncym}	rpm	4000	4000	4200	4200	4200	4200	4200	4200	4200
Max. input speed	<i>n</i> _{1Max}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500
Mean no load running torque (with <i>n</i> ₁ =3000 rpm and 20°C gearhead temperature) ^{d)}	<i>T</i> ₀₁₂	Nm	0.6	0.6	0.4	0.4	0.4	0.4	0.4	0.3	0.3
		in.lb	5.3	5.3	3.5	3.5	3.5	3.5	3.5	2.7	2.7
Max. torsional backlash	<i>j</i> _t	arcmin	Standard ≤5,5 / Reduced ≤3,5								
Torsional rigidity	<i>C</i> _{t21}	Nm/ arcmin	510	510	510	510	510	510	510	510	510
		in.lb/ arcmin	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514	4.514
Max. axial force ^{e)}	<i>F</i> _{2AMax}	N	33000								
		lb _f	7425								
Max. radial force ^{e)}	<i>F</i> _{2RMax}	N	30000								
		lb _f	6750								
Max. tilting moment	<i>M</i> _{2KMax}	Nm	5000								
		in.lb	44250								
Efficiency at full load	<i>η</i>	%	90								
Service life (For calculation, see the Chapter "Information")	<i>L</i> _h	h	> 20000								
Weight incl. standard adapter plate	<i>m</i>	kg	96								
		lb _m	212								
Operating noise (with <i>n</i> ₁ = 3000 rpm no load)	<i>L</i> _{PA}	dB(A)	≤ 71								
Max. permitted housing temperature		°C	+90								
		F	194								
Ambient temperature		°C	0 to +40								
		F	32 to 104								
Lubrication			Lubricated for life								
Paint			Blue RAL 5002								
Direction of rotation			Motor and gearhead opposite directions								
Protection class			IP 65								
Moment of inertia (relates to the drive) Clamping hub diameter [mm]	G 24	<i>J</i> _I	kgcm ²	2.73	2.49	2.46	2.42	2.42	2.42	2.42	2.42
			10 ⁻³ in.lb.s ²	2.42	2.20	2.17	2.14	2.14	2.14	2.14	2.14
	K 38	<i>J</i> _I	kgcm ²	9.64	9.40	9.37	9.33	9.33	9.33	9.33	9.33
			10 ⁻³ in.lb.s ²	8.53	8.32	8.29	8.26	8.26	8.26	8.26	8.26

^{a)} Other ratios available on request

^{b)} Higher speeds are possible if the nominal torque is reduced

^{c)} For higher ambient temperatures, please reduce input speed

^{d)} Idling torques decrease during operation

^{e)} Refers to center of the output shaft or flange

All technical data for front output side applies.




Technical data for rearward output versions, see page 422.

Please contact us for information on the best configuration for S1 conditions of use (continuous operation).

View A

4-stage:

← A

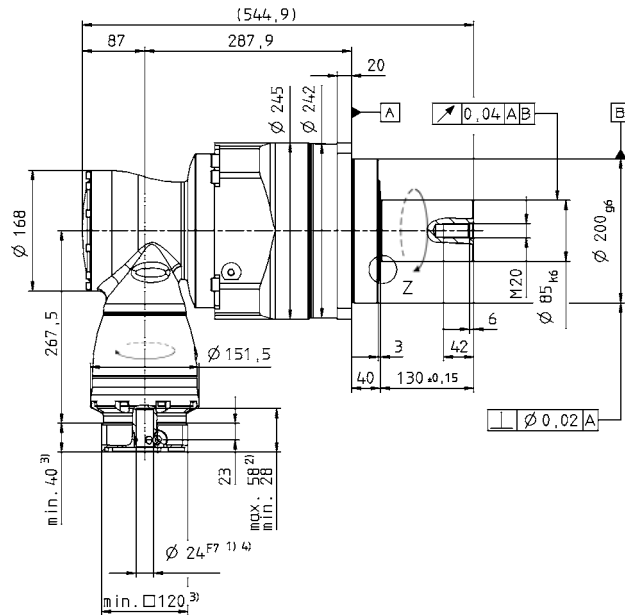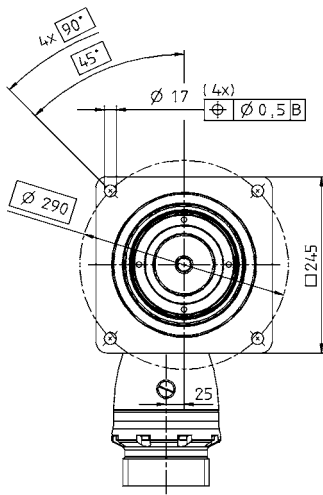


Right-angle gearheads
High End

SPK+

Alternatives: Output shaft variants

Keywayed output shaft in mm
E = key as per DIN 6885, sheet 1, form A

Involute gearing DIN 5480 in mm
X = W 80 x 2 x 30 x 38 x 6m, DIN 5480

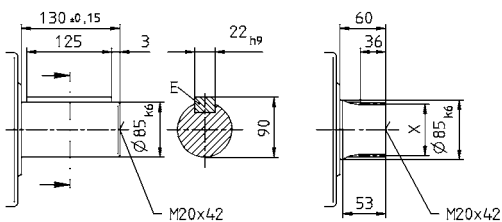

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions ± 1 mm

- 1) Check motor shaft fit.
- 2) Min./Max. permissible motor shaft length. Longer motor shafts are adaptable, please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm.



CAD data is available under
<http://www.wittenstein-alpha.de/en/info-and-cad-finder.html>



Motor mounting according to operating manual