Thyristor \ Diode Module

V_{RRM}	=	2x 1600 V
I_{TAV}	=	250 A
V_T	=	1,08 V

Phase leg

Part number

MCD255-16io1

Backside: isolated

E72873



Features / Advantages:

- International standard package
- Direct copper bonded Al2O3-ceramic with copper base plate
- Planar passivated chip
- Keyed gate/cathode twin pins

Applications:

- Motor control, softstarter
- Power converter
- Heat and temperature control for industrial furnaces and chemical processes
- Lighting control
- Solid state switches

Package: Y1

- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: Copper internally DCB isolated
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

© 2022 IXYS all rights reserved

Rectifier

Symbol	Definition	Conditions		Ratings min.	typ.	max.	Unit
$V_{RSM/DSM}$	*max. non-repetitive reverse/forward blocking voltage*		T_{VJ} = 25°C			1700	V
$V_{RRM/DRM}$	*max. repetitive reverse/forward blocking voltage*		T_{VJ} = 25°C			1600	V
$I_{R/D}$	*reverse current, drain current*	$V_{R/D}$ = 1600 V	T_{VJ} = 25°C			1	mA
		$V_{R/D}$ = 1600 V	T_{VJ} = 140°C			40	mA
V_T	*forward voltage drop*	I_T = 300 A	T_{VJ} = 25°C			1,14	V
		I_T = 600 A				1,36	V
		I_T = 300 A	T_{VJ} = 125°C			1,08	V
		I_T = 600 A				1,33	V
I_{TAV}	*average forward current*	T_C = 85°C	T_{VJ} = 140°C			250	A
$I_{T(RMS)}$	*RMS forward current*	180° sine				450	A
V_{T0}	*threshold voltage* } *for power loss calculation only*		T_{VJ} = 140°C			0,80	V
r_T	*slope resistance* } *for power loss calculation only*					0,68	mΩ
R_{thJC}	*thermal resistance junction to case*					0,14	K/W
R_{thCH}	*thermal resistance case to heatsink*				0,04		K/W
P_{tot}	*total power dissipation*		T_C = 25°C			820	W
I_{TSM}	*max. forward surge current*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			9,20	kA
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			9,94	kA
		t = 10 ms; (50 Hz), sine	T_{VJ} = 140°C			7,82	kA
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			8,45	kA
I^2t	*value for fusing*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			423,2	kA²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			410,6	kA²s
		t = 10 ms; (50 Hz), sine	T_{VJ} = 140°C			305,8	kA²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			296,7	kA²s
C_J	*junction capacitance*	V_R = 400V f = 1 MHz	T_{VJ} = 25°C		438		pF
P_{GM}	*max. gate power dissipation*	t_P = 30 µs	T_C = 140°C			120	W
		t_P = 500 µs				60	W
P_{GAV}	*average gate power dissipation*					20	W
$(di/dt)_{cr}$	*critical rate of rise of current*	T_{VJ} = 140°C; f = 50 Hz repetitive, I_T = 860 A				100	A/µs
		t_P = 200 µs; di_G/dt = 1 A/µs;					
		I_G = 1 A; V_D = ⅔ V_{DRM} non-repet., I_T = 250 A				500	A/µs
$(dv/dt)_{cr}$	*critical rate of rise of voltage*	V_D = ⅔ V_{DRM}	T_{VJ} = 140°C			1000	V/µs
		R_{GK} = ∞; method 1 (linear voltage rise)					
V_{GT}	*gate trigger voltage*	V_D = 6 V	T_{VJ} = 25°C			2	V
			T_{VJ} = -40°C			3	V
I_{GT}	*gate trigger current*	V_D = 6 V	T_{VJ} = 25°C			150	mA
			T_{VJ} = -40°C			220	mA
V_{GD}	*gate non-trigger voltage*	V_D = ⅔ V_{DRM}	T_{VJ} = 140°C			0,25	V
I_{GD}	*gate non-trigger current*					10	mA
I_L	*latching current*	t_p = 30 µs	T_{VJ} = 25°C			200	mA
		I_G = 0,45 A; di_G/dt = 0,45 A/µs					
I_H	*holding current*	V_D = 6 V R_{GK} = ∞	T_{VJ} = 25°C			150	mA
t_{gd}	*gate controlled delay time*	V_D = ½ V_{DRM}	T_{VJ} = 25°C			2	µs
		I_G = 1 A; di_G/dt = 1 A/µs					
t_q	*turn-off time*	V_R = 100 V; I_T = 300A; V_D = ⅔ V_{DRM}	T_{VJ} =125 °C		200		µs
		di/dt = 10 A/µs; dv/dt = 50 V/µs; t_p = 200 µs					

© 2022 IXYS all rights reserved

Package Y1				Ratings			
Symbol	**Definition**	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
I_{RMS}	*RMS current*	per terminal				600	A
T_{VJ}	*virtual junction temperature*			-40		140	°C
T_{op}	*operation temperature*			-40		125	°C
T_{stg}	*storage temperature*			-40		125	°C
Weight					680		g
M_D	*mounting torque*			4,5		7	Nm
M_T	*terminal torque*			11		13	Nm
$d_{Spp/App}$	*creepage distance on surface | striking distance through air*		*terminal to terminal*	16,0			mm
$d_{Spb/Apb}$			*terminal to backside*	16,0			mm
V_{ISOL}	*isolation voltage*	t = 1 second	50/60 Hz, RMS; I_{ISOL} ≤ 1 mA	4800			V
		t = 1 minute		4000			V

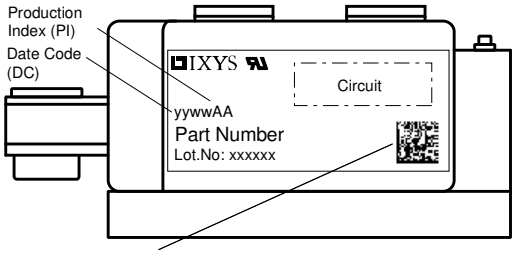

Data Matrix: *part no.* (1-19), DC + *PI* (20-25), *lot.no.#* (26-31), *blank* (32), *serial no.#* (33-36)

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCD255-16io1	MCD255-16io1	Box	3	461822

Equivalent Circuits for Simulation

** on die level* T_{VJ} = 140°C



Thyristor

$V_{0\,max}$	*threshold voltage*	0,8	V
$R_{0\,max}$	*slope resistance **	0,5	mΩ

© 2022 IXYS all rights reserved

Outlines Y1

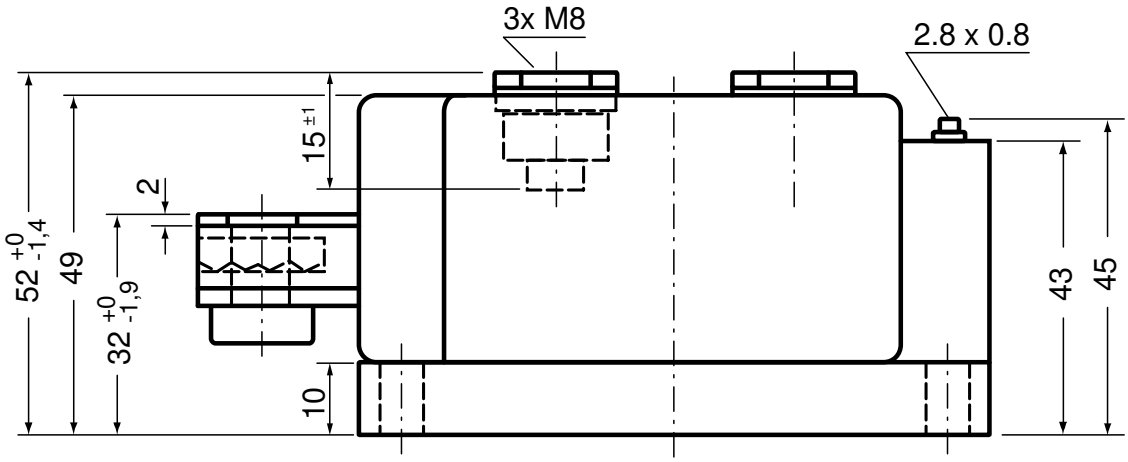

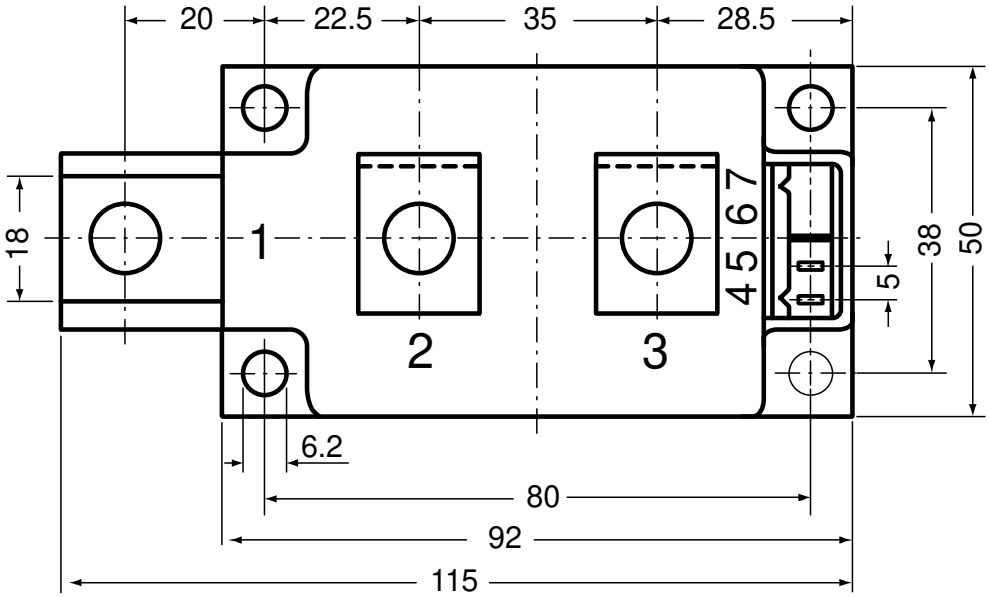

Optional accessories for modules
Keyed gate/cathode twin plugs with wire length = 350 mm, gate = white, cathode = red
Type ZY 180L (L = Left for pin pair 4/5) UL 758, style 3751



© 2022 IXYS all rights reserved

Thyristor

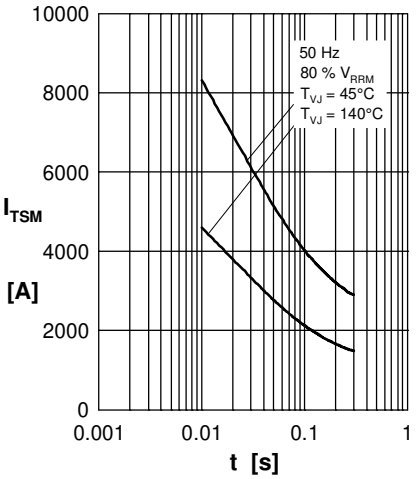

Fig. 1 Surge overload current
$I_{T(F)SM}$: Crest value, t: duration

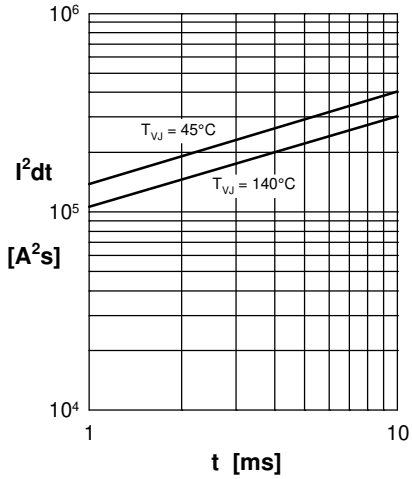

Fig. 2 I^2dt versus time

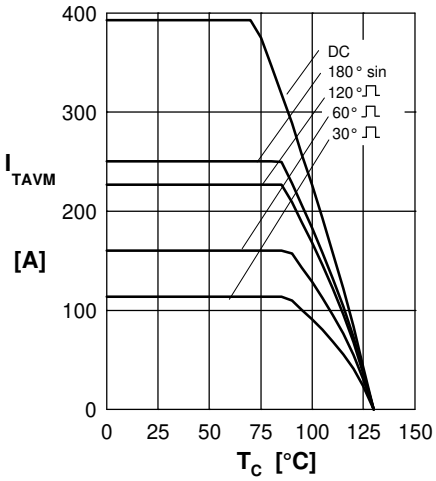

Fig. 3 Max. forward current at case temperature

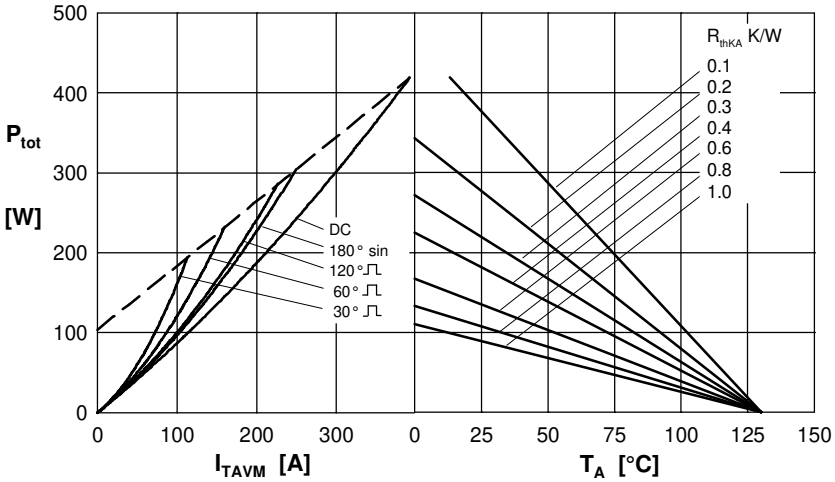

Fig. 4 Power dissipation versus on-state current and ambient temperature (per thyristor or diode)

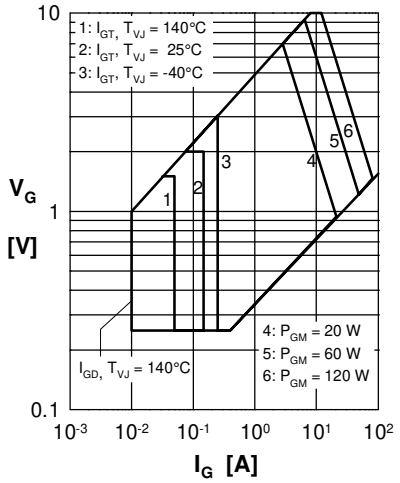

Fig. 5 Surge overload current
$I_{T(F)SM}$: Crest value, t: duration

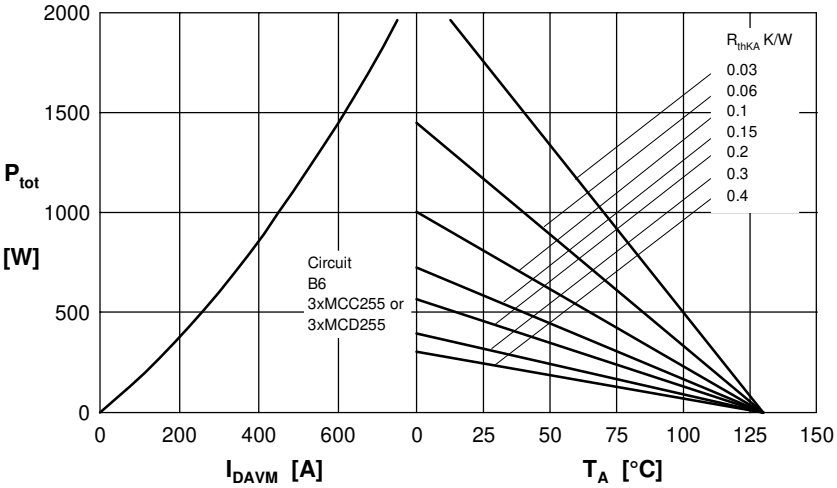

Fig. 6 Three phase rectifier bridge: Power dissipation vs. direct output current and ambient temperature

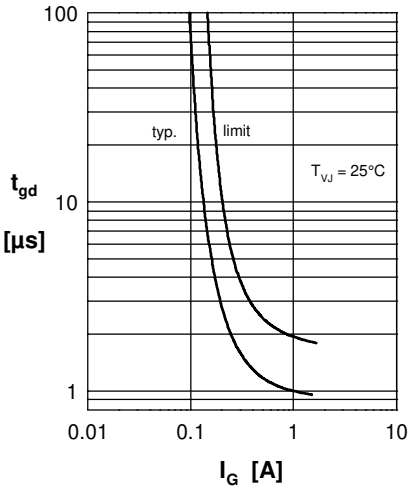

Fig. 7 Gate trigger delay time

© 2022 IXYS all rights reserved

Rectifier

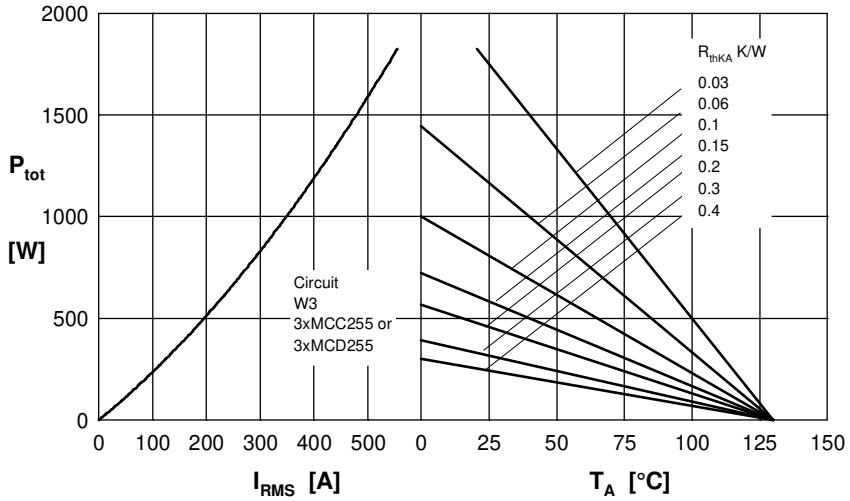

Fig. 8 Three phase AC-controller: Power dissipation versus R_{MS} output current and ambient temperature

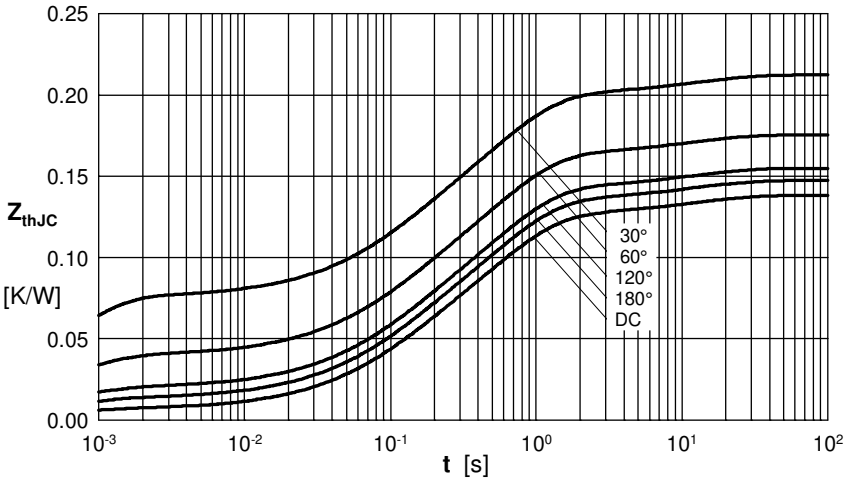

R_{thJC} for various conduct. angles d:

d	R_{thJC} [K/W]
DC	0.139
180°	0.148
120°	0.156
60°	0.176
30°	0.214

Constants for Z_{thJC} calculation:

i	R_{thi} [K/W]	t_i [s]
1	0.0066	0.00054
2	0.0358	0.098
3	0.0831	0.54
4	0.0129	12

Fig. 9 Transient thermal impedance junction to case (per thyristor/diode)

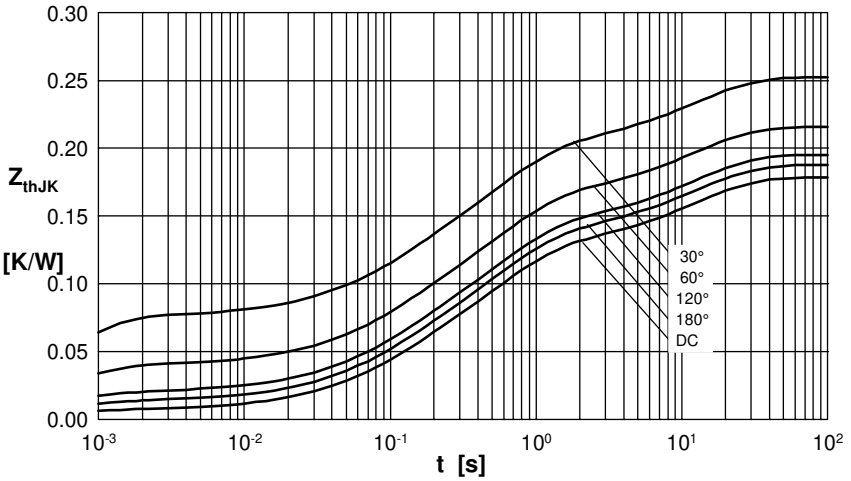

R_{thJK} for various conduct. angles d:

d	R_{thJK} [K/W]
DC	0.179
180°	0.188
120°	0.196
60°	0.216
30°	0.254

Constants for Z_{thJK} calculation:

i	R_{thi} [K/W]	t_i [s]
1	0.0066	0.00054
2	0.0358	0.098
3	0.0831	0.54
4	0.0129	12
5	0.04	12

Fig. 10 Transient thermal impedance junction to heatsink (per thyristor/diode)

© 2022 IXYS all rights reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

IXYS:

MCD255-16IO1